



ISSUE 2; September 2014 - RoHS 2011/65/EU

Description

- Standard 2 x 1.6mm crystal oscillator in a ceramic package with a seam sealed metal lid, hermetically sealed

Frequency Parameters

- Frequency 1.0MHz to 80.0MHz
- Frequency Stability $\pm 30.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing $\pm 5\text{ppm}$

Electrical Parameters

- Supply Voltage $1.8\text{V} \pm 10\%$
- Standby Current: 10 μA max (pad 1 at logic '0')

Operating Temperature Ranges

- 20 to 70°C
- 40 to 85°C

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF max

Output Control

- Standby Operation: Logic '1' ($\geq 70\%V_S$) to pad 1 enables oscillator output
Logic '0' ($\leq 30\%V_S$) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output

Environmental Parameters

- Impact: Weight of 10g dropped to centre of part from a height of 6mm
- Vibration: IEC 60068-2-6: 1.5mm amplitude, 10Hz-55Hz, 1min in 3 mutually perpendicular planes, duration 2hrs each plane (total 6hrs)
- Storage Temperature Range: -40 to 85°C


Ordering Information

- Frequency*
- Model*
- Output
- Frequency Stability*
- Operating Temperature Range*
- Supply Voltage
(*minimum required)
- Example
10.0MHz IQXO-542
CMOS $\pm 50\text{ppm}$ -20 to 70C 1.8V

Compliance


- RoHS Status Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Outline (mm)




- Pad Connections**
- Standby Operation
 - GND
 - Output
 - +Vs

Solder Pad Layout




Underside View

Test Circuit

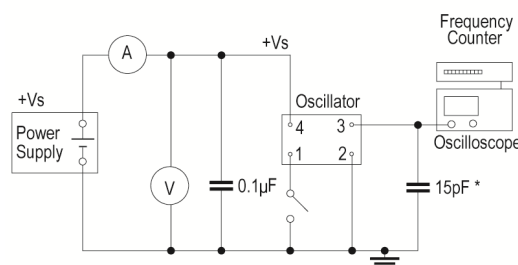

* Inclusive of jigging and equipment capacitance

Wave Form

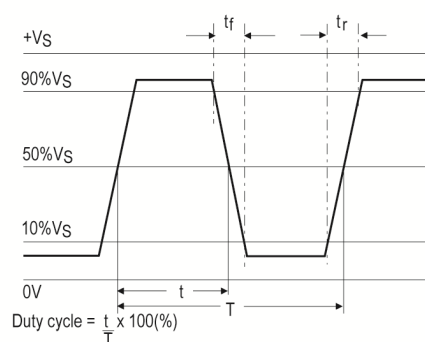

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

**Packaging Details**

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 3,000
- Pack Style: Bulk Loose in bulk pack
Pack Size: 100

Electrical Specification - maximum limiting values 1.8V $\pm$ 10%

Frequency Min	Frequency Max	Temperature Range	Stability (min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	19.999999MHz	-20 to 70	$\pm$ 30.0	3	5	45/55
		-40 to 85	$\pm$ 50.0	3	5	45/55
20.0MHz	39.999999MHz	-20 to 70	$\pm$ 30.0	5	5	45/55
		-40 to 85	$\pm$ 50.0	5	5	45/55
40.0MHz	59.999999MHz	-20 to 70	$\pm$ 30.0	6	5	45/55
		-40 to 85	$\pm$ 50.0	6	5	45/55
60.0MHz	80.0MHz	-20 to 70	$\pm$ 30.0	8	5	45/55
		-40 to 85	$\pm$ 50.0	8	5	45/55

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com