

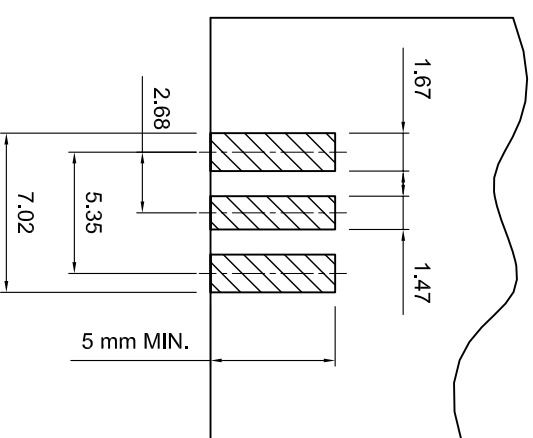
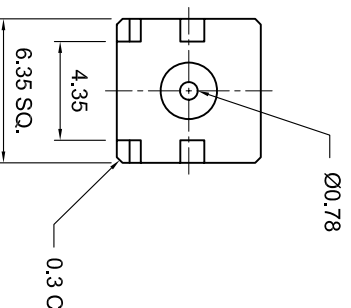
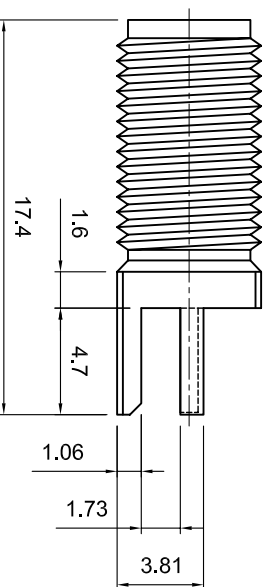


Tolerances	Revisions		Date
	Description/Approved	Date	
1.-20=+/-0.2		Approved M.H.	
20.-30=+/-0.3		Checked M.H.	Date
30.-40=+/-0.4		Drawn T.J.A.	Date
40.-50=+/-0.5			08/20/2007
50.-100=+/-0.75	NOTES (plating thickness	5. Per MIL-P-19468	9. Nickel pl. 100 min. over
100.-300=+/-1.5	in micro-inches):	6. Per ZZ-R-765	copper stifle
Angles=+/-1	1. Per QQ-B-626	7. Per WW-1-799	10. Per QQ-P-35
	2. Per QQ-S-764	8. Gold pl. 5 min. over	11. Gold pl. 30 min. over
	3. Per QQ-C-550	nickel pl. 50 min. over	
	4. Per QQ-B-750	copper stifle	nickel pl. 50 min. over
			copper stifle

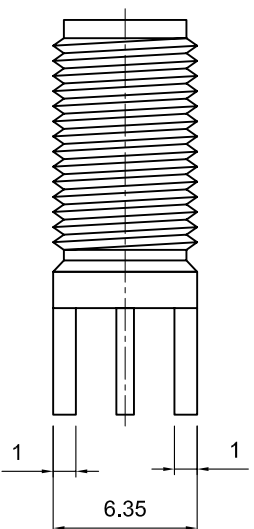

LANDING PAD DIMENSIONS

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: RP-F	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	--	--
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--



Lighthouse Technologies, Inc.

5640 Kearny Mesa Road, Suite N
San Diego, California 92111

Part Number:
L77-SASRF55MGT

Description

SMA reverse polarity end launch jack for .062" PCB, med.

length (17.4 mm overall) Gold plated brass body, teflon dielectric.

Scale	Drawing No.	File Name
3:1		SASRF55MGT