


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

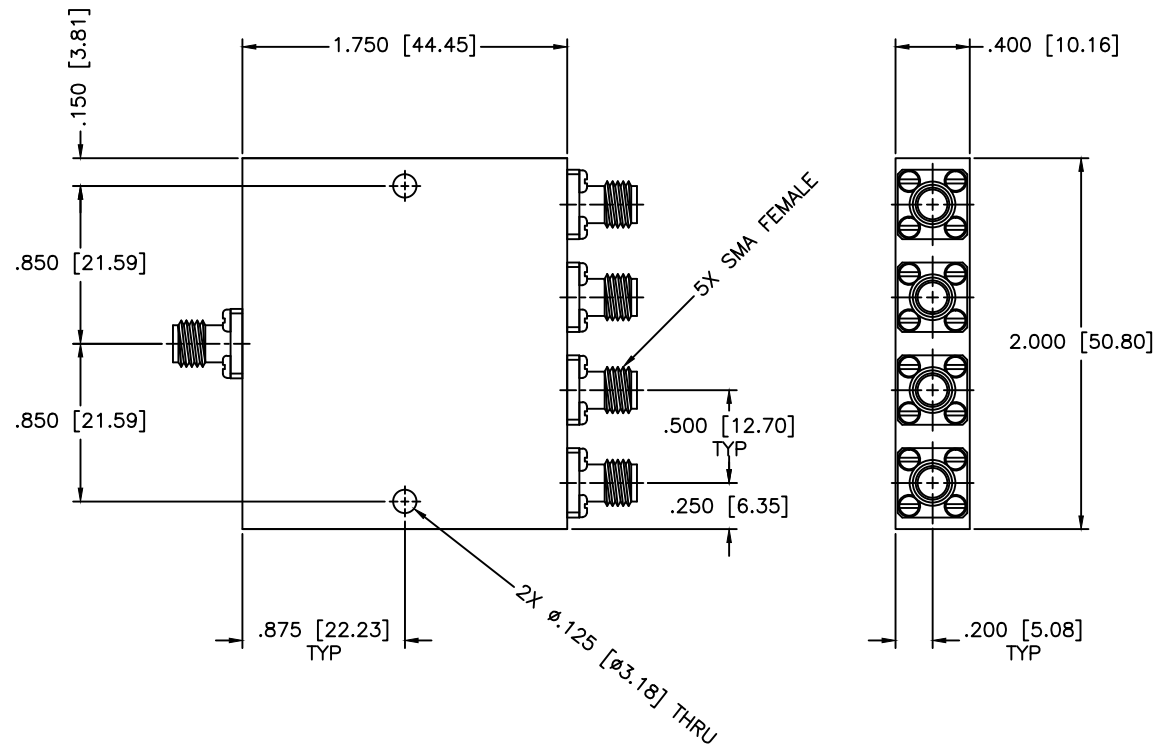

SPECIFICATIONS

Frequency Range: 3.4–4.2 GHz
 Insertion Loss: 1.8dB Max.
 Isolation: 18dB Min.
 Power: 30W (vswr@1.2)
 Amplitude Balance: ± 0.3 dB Max.
 VSWR IN/OUT: 1.30:1/1.20:1 Max.
 Phase Balance: ± 8 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 05-09-2008		DRAWING TITLE: 4-WAY POWER DIVIDER PART NO. PS4-57
APPROVED: T. Nguyen		DATE: 05-09-2008		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5 SIZE: A REV: A DO NOT SCALE THE DRAWING		DWG NO. 83850