



RF-LAMBDA

The power beyond expectations

RFLCX17G13G18

1.35~1.85GHz 250W High Power Circulator

Electrical Specifications:

Frequency Range: 1.35-1.85GHz

Bandwidth: 500MHz

Insertion Loss: 0.3dB

Isolation: 20dB

Temp. Operation: -20~+75°C



Temp. Storage: -40~+85°C

Forward Power: 250W (CW)

Reverse Power: 250W (CW)

Peak Power: 1200W

* Customerization available upon request.

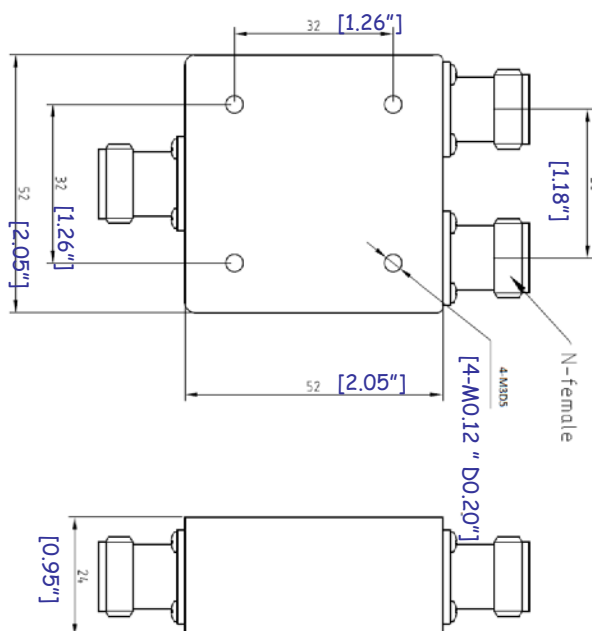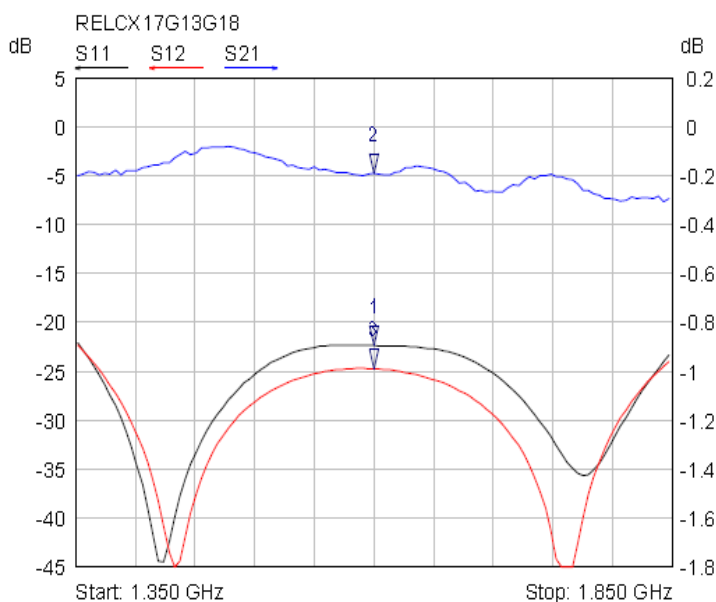

Mkt	Trace	X-Axis	Value	Notes
1	S11	1.600 GHz	-22.35 dB	
2	S21	1.600 GHz	-0.19 dB	
3	S12	1.600 GHz	-24.74 dB	

1.35~1.85GHz 250W High Power Circulator