




Standards
NF C 96-315
MIL-DTL-39030

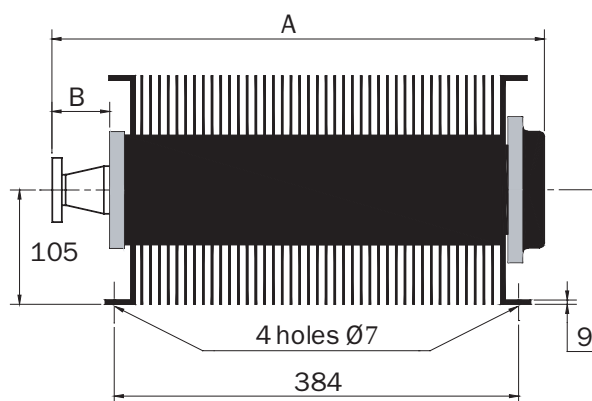

Impedance	50 $\Omega \pm 5\%$
Frequency	DC - 1 GHz (on request DC - 2.5 GHz)
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-25 to +110°C
Average power @ 25°C	1.2 kW
Cooling	Natural air convection
Weight	16 kg



Dimensions in mm

P/N	Connector	A	B
17-5243	N f	477	50
17-0305	7-16 f	449	22
17-0429*	7-16 f	449	22
17-5240	EIA 7/8"	482	55
17-0023*	EIA 7/8"	482	55
17-0442**	EIA 7/8"	482	55
17-5239	EIA 1.5/8"	504	77
17-0010**	EIA 1.5/8"	504	77
17-0171*	EIA 1.5/8'	504	77

* Thermoswitch 130°C

** Thermoswitch 90°C

Option	VSWR ≤ 1.05 470 to 860 MHz for digital applications
--------	---