

SHROUD TO PCB MALE LIMITED DETENTE

SC5336


SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-18 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.3 MAX

MECHANICAL:

MATERIAL BODY: BRASS
CENTER CONTACT: BRASS
PLATING: 30 μ -in
INSULATOR: TEFLON
INTERFACE: SMP 94007
LIMITED DETENTE
OP. TEMP RANGE: -55C- +120C

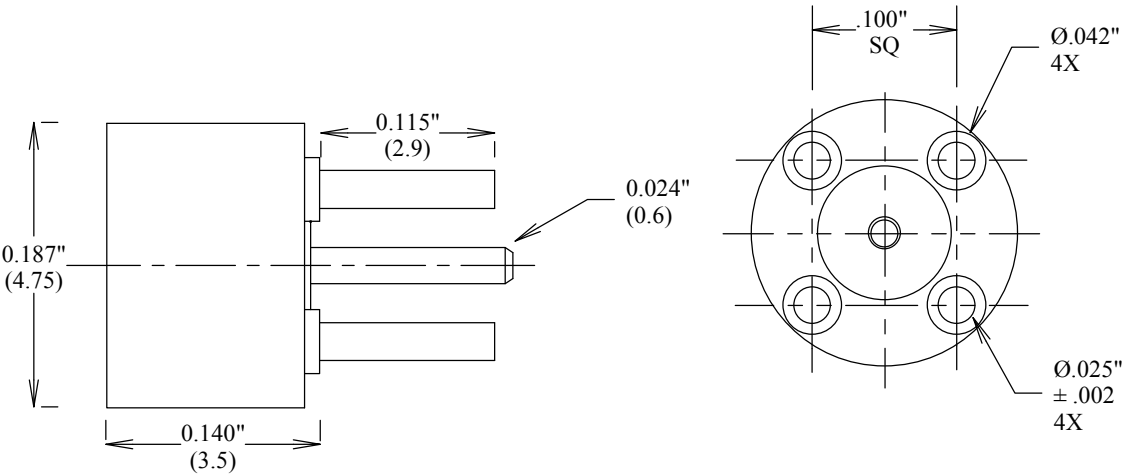

MOUNTING DIMENSIONS

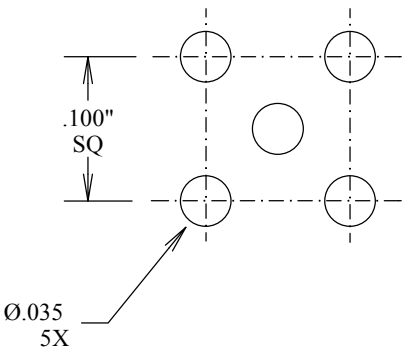

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SHROUD TO PCB MALE
LIMITED DETENTE**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5336	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical