

Specifications


Parameter	Unit	Min	Typical	Max
Center Frequency (F0)	MHz		75	
Bandwidth (B)	MHz		10	
-3 dB Bandwidth (B3)	MHz	11.2	11.3	
-40 dB Bandwidth (B40)	MHz		12.8	12.9
Delay (T0)	μsec	1.72	1.734	1.75
Insertion Loss (IL)	dB		22.6	23.5
Amplitude Ripple	dB p-p		0.3	0.5
Phase Ripple	deg p-p		2.1	4
Rejection	dB	56	58	
Spurious for $ t-T0 > .9T0$	dB		-45	-42
Substrate Material	128YX-LN			

Notes:

- Center Frequency (F0) and Bandwidth (B) are defined, not measured.
- Insertion Loss is the minimum loss for $|f-F0| < .5B$
- Ripple spec applies to the $|f-F0| < .4B$, and is doubled for $.4B < |f-F0| < .5B$
- Rejection spec applies to $(B40 \text{ Spec} - B/2) < |f-F0| < F0/2$
- Specifications are at 22C only. Unit will operate undamaged from -54C to 125C with shifts $dF0 = -x \cdot F0$, $dT0 = x \cdot T0$, where $x = 75E-6 \cdot (\text{temperature} - 22C)$

Typical Performance


Frequency Response
(Best Fit Linear Phase Removed)

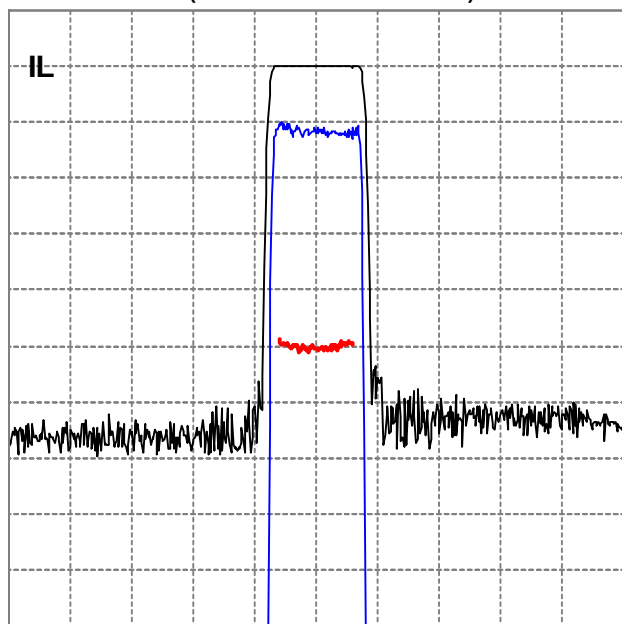

10 dB/div, 1 dB/div, 10 deg/div, 7.500 MHz/div


Impulse Response

FFT(Frequency Response * Cos(0.5 * PI * MIN(1, MAX(0, |f-F0| * 2.0/10 - 1.0))) ^ 2)

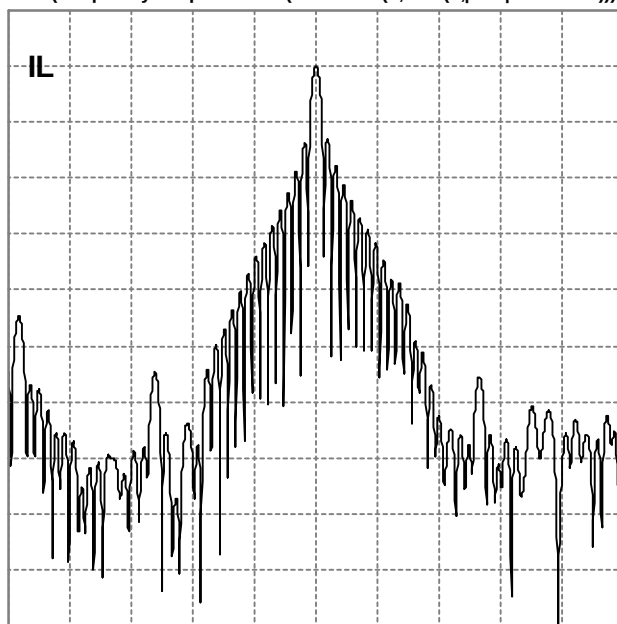


10 dB/div, 0.667 us/div

Package Outline

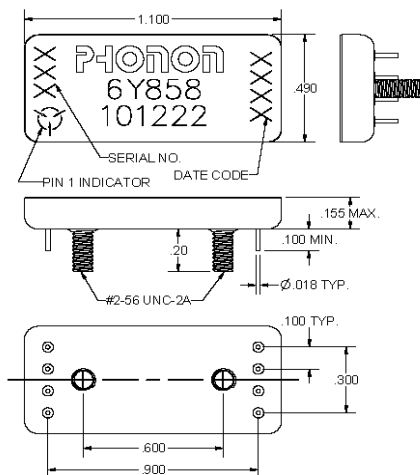

Matching

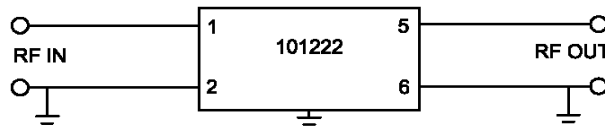

Matched S-parameters available at www.phonon.com