
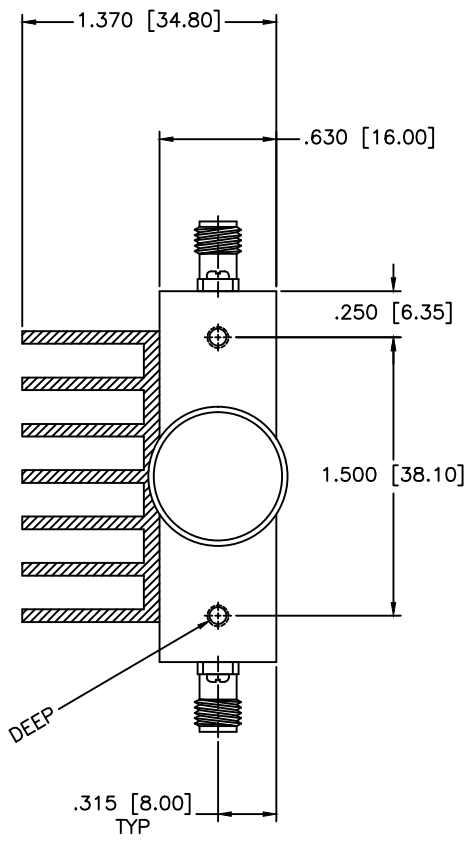


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

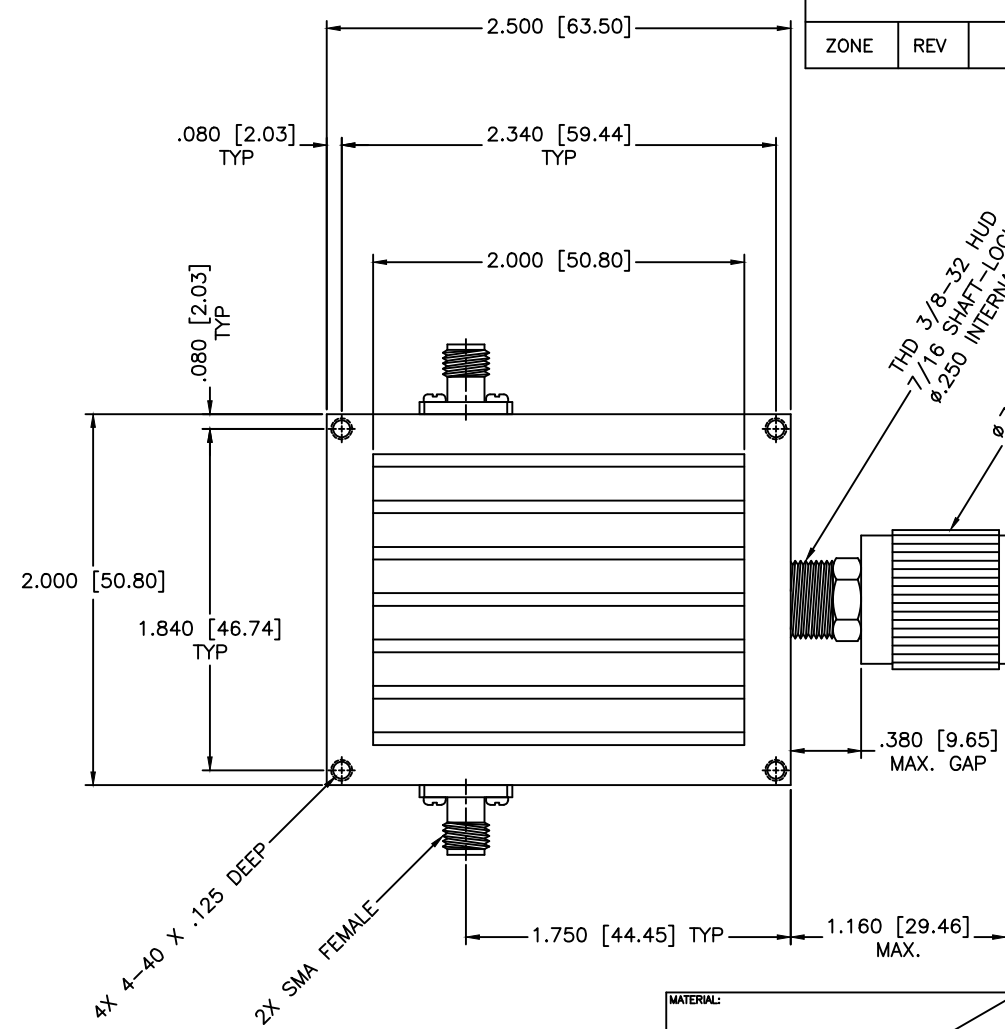

SPECIFICATION

Frequency Range: 7.9–12.7 GHz
 Attenuation: 10dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 RF Power: 50W Average, 5kW Peak

MATERIAL: 		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.015 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE:		CONTINUOUSLY VARIABLE ATTENUATOR, HIGH POWER			
PART NO.		HA30-7-10			
CAGE CODE:	SIZE:	REV:	DWG NO.	DO NOT SCALE THE DRAWING	
OD2L5	A	N/A	85486		
DRAWN:		DATE:			
Paiboon Luekhamhan		02-10-2011			
APPROVED:		DATE:			
T. Nguyen		02-10-2011			