

2.92mm M .085 SEMI-RIGID

SMC292-0853


SPECIFICATIONS

ELECTRICAL
50 OHMS
VSWR 1.25:1 MAX @ 40 GHZ
FREQUENCY: DC-40 GHZ

MECHANICAL
500 CYCLES MIN
4.0 INCH-OUNCES MIN CONTACT TORQUE
8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL
-55°C TO +100° C
CORROSION: MIL-STD 202
VIBRATION: MIL-STD 202

MATERIALS PASSIVATED STAINLESS STEEL
BODY: BeCu ASTM-B196
CONTACT: BeCu ATSM-B-196
PASSIVATED ASTM A380
CENTER CONTACTS Au PLATED
MIL-G-45204

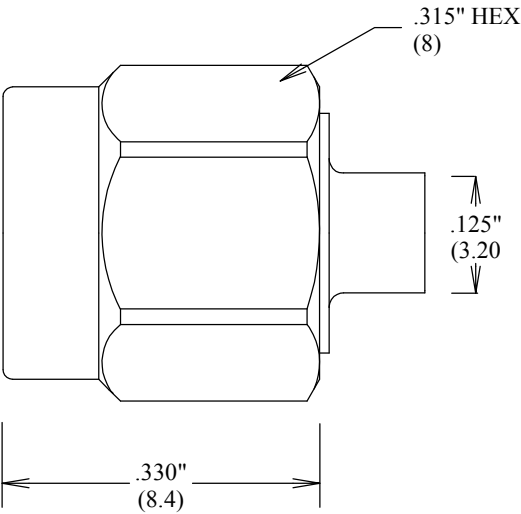

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE


2.92mm M .085 SEMI-RIGID

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SMC292-0853	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(mm) Typical

2.92mm M .085 SEMI-RIGID ASSEMBLY INSTRUCTIONS

SMC292-0853 AI

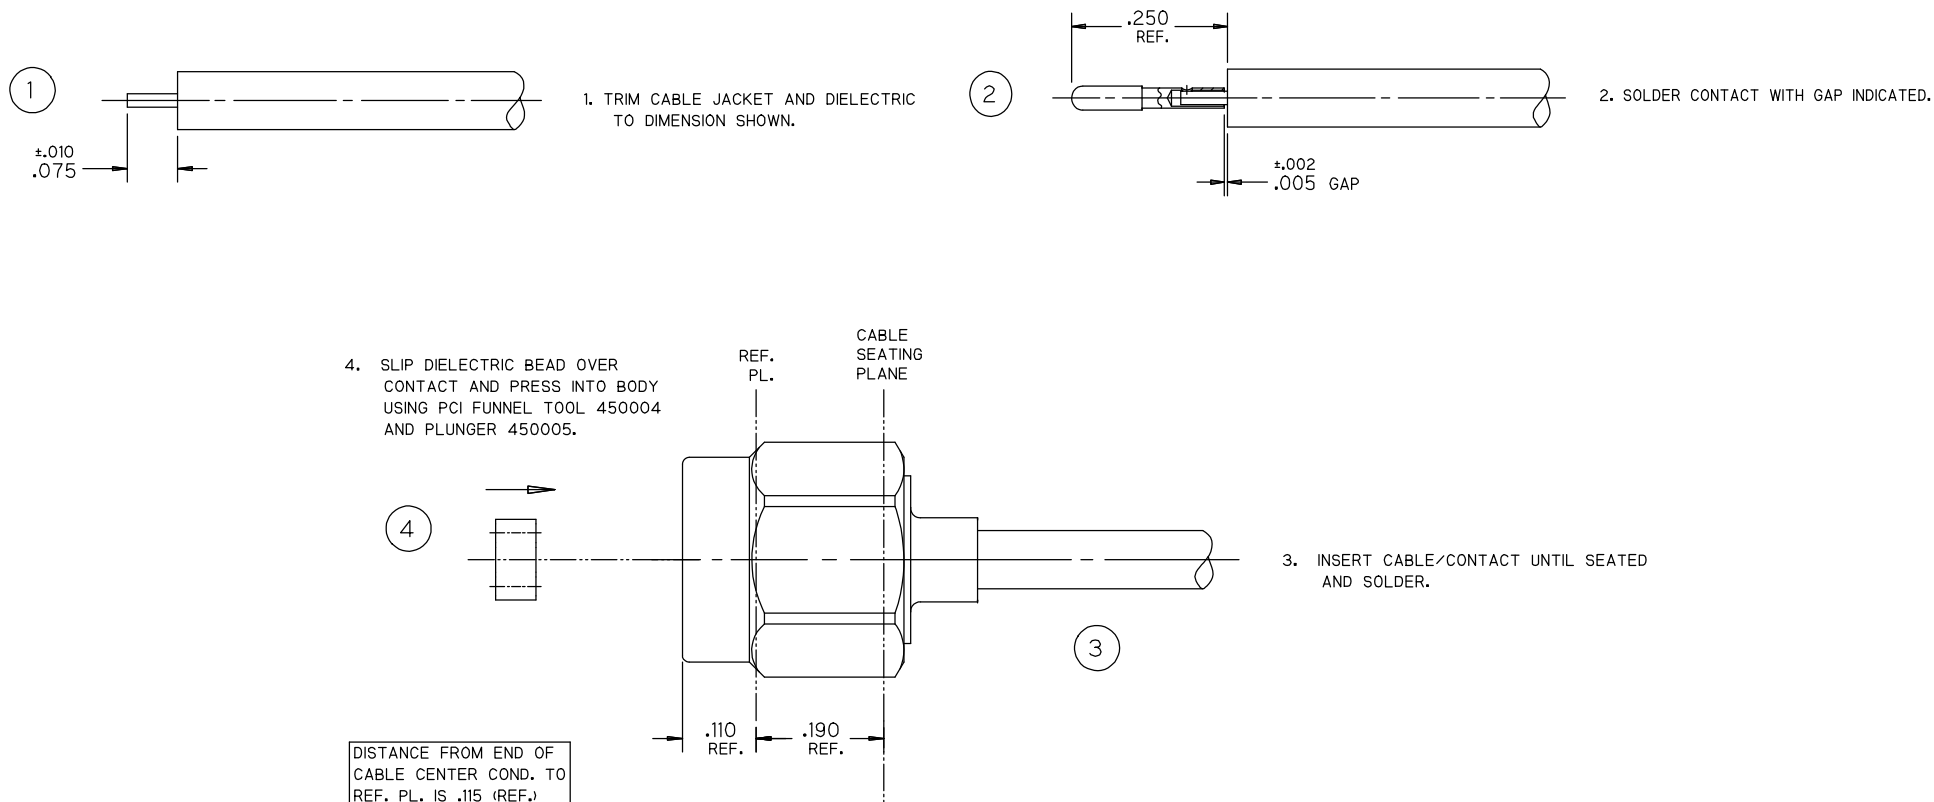

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**2.92mm M .085 SEMI-RIGID
ASSEMBLY INSTRUCTIONS**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SMC292-0853 AI	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(mm) Typical