

Surface Mount I&Q Demodulator

50Ω 104 to 176 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
LO/RF Power	50mW
I&Q Current	40mA


Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO (carrier)	2
RF (signal)	9
I (0°)(ref.)	4
Q (90°)*	11
GROUND	1,3,5,6,7,8,10,12,13,14

* Q=+90° for LO<RF
Q=-90° for LO>RF


Outline Drawing

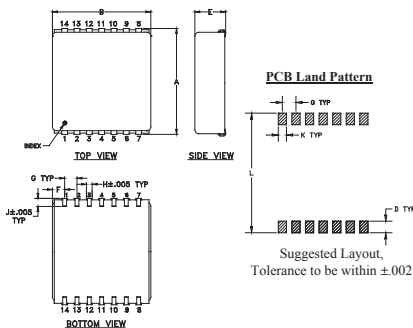

Outline Dimensions (inch)

A	B	C	D	E	F	G
.870	.800	--	.100	.250	.100	.100
22.10	20.32	--	2.54	6.35	2.54	2.54
H	J	K	L		wt	
.047	.065	.065	.890		grams	
1.19	1.65	1.65	22.61		4.0	

Demo Board MCL P/N: TB-21 Suggested PCB Layout (PL-209)

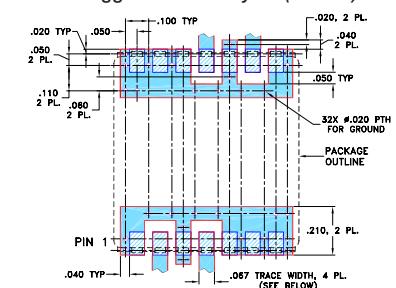

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- shielded metal case with J-leads
- excellent 3rd & 5th order harmonic suppression
- good amplitude & phase unbalance
- aqueous washable

Applications

- communication systems



CASE STYLE: BG291

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Demodulator Electrical Specifications

MODEL NO.	FREQUENCY (MHz)				CONVERSION LOSS (dB)			AMPLITUDE UNBALANCE (dB)		PHASE UNBALANCE (Deg.)		HARMONIC SUPPRESSION (dBc)			
	RF (SIGNAL)	LO (CARRIER)	I&Q									3XI/Q	5XI/Q		
	f _r	f _l	Min.	Max.	$\bar{x}$	σ	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.
JCIQ-176D	104	176	DC	5	5.5	0.1	7.0	0.15	0.6	2	5	52	40	65	50


Notes:
1. Operating LO Power: 10±0.5 dBm
2. 1 dB Compression at +4 dBm RF input
3. DC offset 1mV typ.
4. Conversion Loss=RF power, dBm - (I+Q) power, dBm

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Amplitude Unbalance (dB)	Phase (I&Q) (deg.)	Frequency (MHz)		DC Offset (mV)
				LO	RF	
140.30	0.30	5.67	90.71	96.00	96.10	0.18
140.54	0.54	5.61	90.55	100.00	100.10	0.19
140.77	0.77	5.56	90.69	104.00	104.10	0.19
141.01	1.01	5.55	90.71	107.79	107.89	0.19
141.24	1.24	5.57	90.68	115.37	115.47	0.19
141.48	1.48	5.55	90.75	119.16	119.26	0.19
141.71	1.71	5.55	90.72	122.95	123.05	0.19
141.95	1.95	5.54	90.95	126.74	126.84	0.20
142.18	2.18	5.55	91.00	134.32	134.42	0.19
142.42	2.42	5.54	90.99	138.11	138.21	0.19
142.78	2.78	5.55	91.18	141.90	142.00	0.19
143.03	3.03	5.55	91.27	145.68	145.78	0.21
143.27	3.27	5.55	91.29	153.26	153.36	0.24
143.52	3.52	5.56	91.11	157.05	157.15	0.25
143.77	3.77	5.56	91.16	160.84	160.94	0.25
144.01	4.01	5.55	90.87	164.63	164.73	0.26
144.26	4.26	5.56	90.83	172.21	172.31	0.25
144.51	4.51	5.56	90.78	176.00	176.10	0.26
144.75	4.75	5.55	90.81	180.00	180.10	0.25
145.00	5.00	5.56	91.09	184.00	184.10	0.26

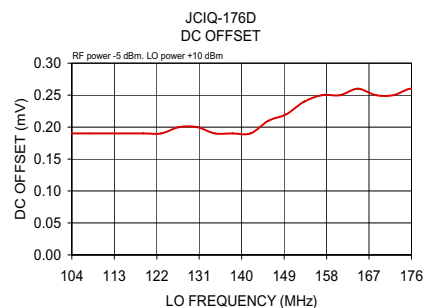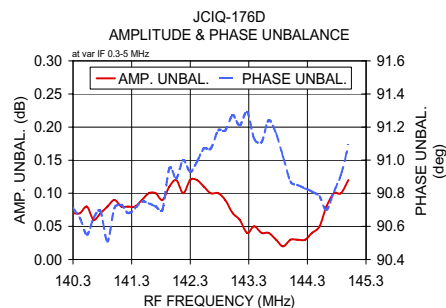

I&Q demodulation block diagram



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
JCIQ-176D
DJ/VV/CP
150814
Page 1 of 1