


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	03/17/02
			Checked	Date
			M.H.	03/17/02
		Drawn	Date	
		K.R.E.	03/14/02	
NOTES (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
1. Per QQ-B-626	6. Per ZZ-R-765	10. Per QQ-P-35		
2. Per QQ-S-764	7. Per WW-T-799	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike			
4. Per QQ-B-750				

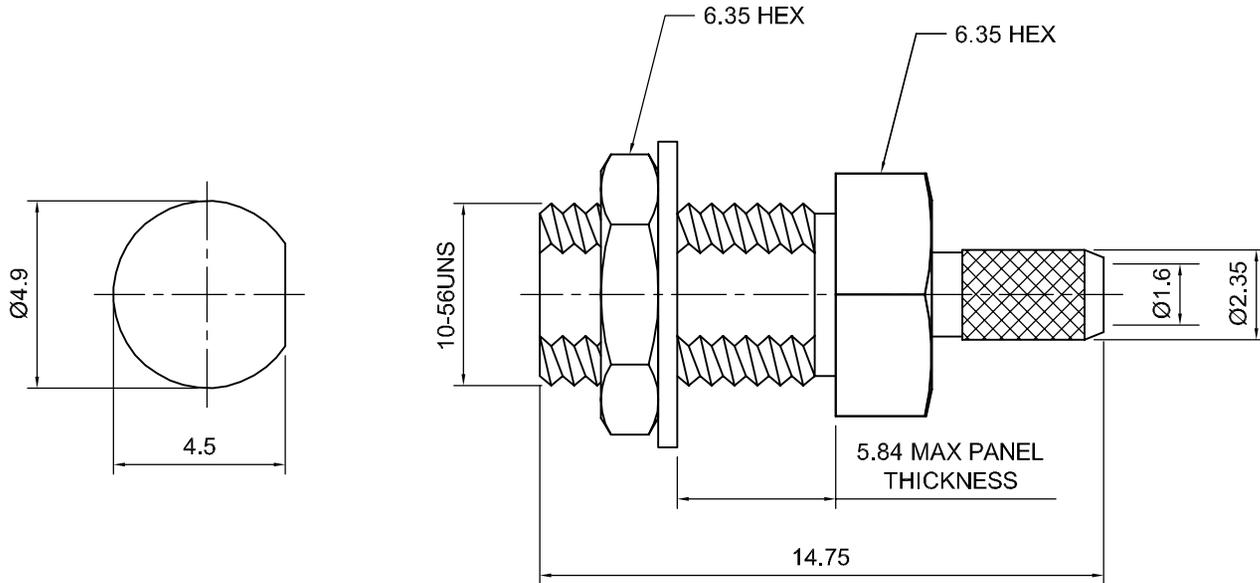

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Gold, Note 8	 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-MXSF13GT-316		
Center Contact: Female	Brass, Note 1	Gold, Note 11			
Insulation	Teflon, Note 5	Phosphor Bronze	Description		
Ferrule	Annealed Copper, Note 7	Same as body	MMCX bulkhead crimp jack for RG-316. Gold plated brass body,		
Gasket	-	-	teflon dielectric		
Hex Nut	Brass, Note 1	Same as body	Scale	Drawing No.	File Name
Lock Washer	Brass, Note 1	Same as body	5:1	MCX/MXSF13-316	MXSF13-316