




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

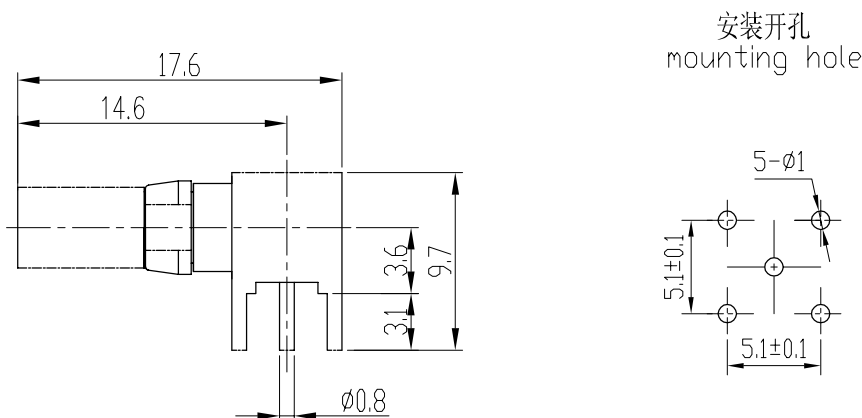

### Electrical Characteristics:

1. Characteristic Impedance: 50  $\Omega$
2. Frequency range: DC~2Ghz
3. Contact resistance  
Center conductor:  $\leq 6.0 \text{ m}\Omega$   
Out conductor:  $\leq 2.0 \text{ m}\Omega$
4. Insulation resistance:  $\geq 10000 \text{ M}\Omega$
5. Insulator withstanding: 750V
6. Durability: 500cycles

### Application: DIN 41626

### Material&Finishing

1. Center contact :  
Male: phosphor bronze, gold plated
2. Body: brass, gold plated
3. Insulators: PTFE

### 主要性能指标:

1. 特性阻抗: 50  $\Omega$
2. 频率范围: DC~2Ghz
3. 接触电阻:  
中心导体:  $\leq 6.0 \text{ m}\Omega$   
外导体:  $\leq 2.0 \text{ m}\Omega$
4. 绝缘电阻:  $\geq 10000 \text{ M}\Omega$
5. 介质耐压: 750V
6. 插拔次数: 500次

### 执行标准: DIN 41626

### 材料和镀层

1. 中心接触件:  
插针: 锡磷青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

|                                                                                                                                                                         |      |       |  |                                  |                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|--|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
|   |      | SCALE |  | DSB-JWHD<br>RF COAXIAL CONNECTOR | UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE mm, TOLERANCES ARE<br>FRACTIONS   DECIMALS   ANGLES<br>.X± .15                    ±1°<br>.XX± .05<br>.XXX± |
|                                                                                                                                                                         |      | 2.5:1 |  |                                  |                                                                                                                                                         |
|                                                                                                                                                                         | NAME | DATE  |  |                                  |                                                                                                                                                         |
| DRAWN                                                                                                                                                                   |      |       |  |                                  |                                                                                                                                                         |
| CHECKED                                                                                                                                                                 |      |       |  |                                  |                                                                                                                                                         |
| APPROVED                                                                                                                                                                |      |       |  |                                  |                                                                                                                                                         |

西安富士达科技股份有限公司  
XI'AN FORSTAR S&T CO.,LTD.

西安富士达科技股份有限公司  
XI'AN FORSTAR S&T CO.,LTD.