

REVISIONS				DATE	APPROVED
2	REV	DESCRIPTION		8/7/08	
-		ORIGINAL RELEASE			

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range:
Gain:
Gain Flatness:
Noise Figure:
OP1dB:
VSWR Input/Output:
DC Voltage Supply:
DC Current Draw:
- 0.1 to 0.2 GHz
15dB Typ.
+/-0.5dB Max.
6.0dB Typ.
19dBm Min.
2.0:1 Max.
+12 to +15V/DC
225mA Max.

Features:

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

Available Options:

- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

Environmental Ratings:


- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
Humidity: MIL-STD-202F, METHOD 103B COND B.
Shock: MIL-STD-202F, METHOD 213B COND B.
Altitude: MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER



PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

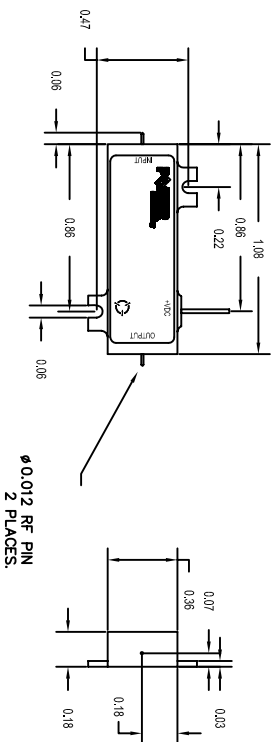

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.010 ±
.XXX ± 0.005

PART NO.		DATE		TITLE		REV	
MATERIAL:		APPROVALS		DATE		REV	
6061-T6 Aluminum		K. Mason		8/21/08		1	
FINISH:		PRODUCT FEATURE		DATE		REV	
Gold Plate over Nickel		PE2-15-081082-6R0-21-12-SF		B. 11K53		WEB - MODEL	
DO NOT SCALE DRAWING		5715 Industry Lane, Unit 11		FREDERICK, MARYLAND		1 OF 1	