


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

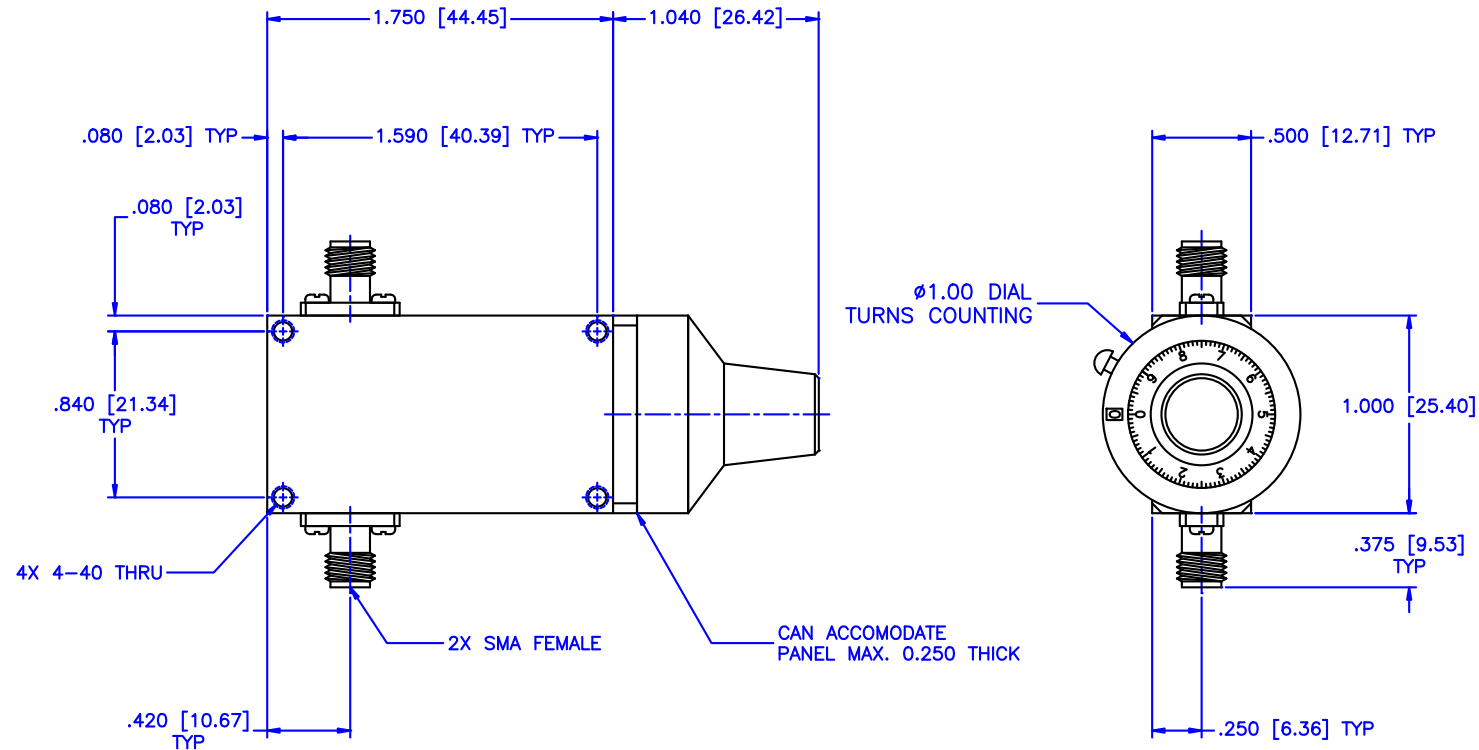

SPECIFICATIONS

Frequency Range: 6–18 GHz
 Attenuation: 30dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 RF Power: 7 W Average, 3kW Peak

Environmental

Temperature range: –55°C to +110°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000 ft. Survival
 25,000ft Operating

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344–6254 FAX: (727) 381–6116 http://WWW.MCLI.COM		SCALE: N/A SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.05 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: ATTENUATOR WITH DIAL			
PART NO. CVA22–30/D		CAGE CODE: 0D2L5			
DRAWN: Paiboon Luekhamhan DATE: 01–31–2011		APPROVED: T. Nguyen DATE: 01–31–2011		SIZE: A REV: N/A DWG NO. 85282	
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING			