

Description:


PMI Model Number: PE2-30-1R018R0-4R5-22-12-SFF-1 is a 1 to 18 GHz low noise amplifier. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component.

Specifications:

Frequency Range:	1 to 18 GHz
Gain:	30dB Typ
Gain Flatness:	± 1.5 dB Max
Noise Figure:	4.5dB Max
OP1dB:	22dBm Min
VSWR Input/Output:	2.0:1 Max
DC Supply:	+12 to +15VDC @ 500mA Typ
Connectors In/Out:	SMA Female
Finish:	Gold Plated

		REVISIONS		
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	09/05/13	

PE2 HOUSING WITH CARRIER

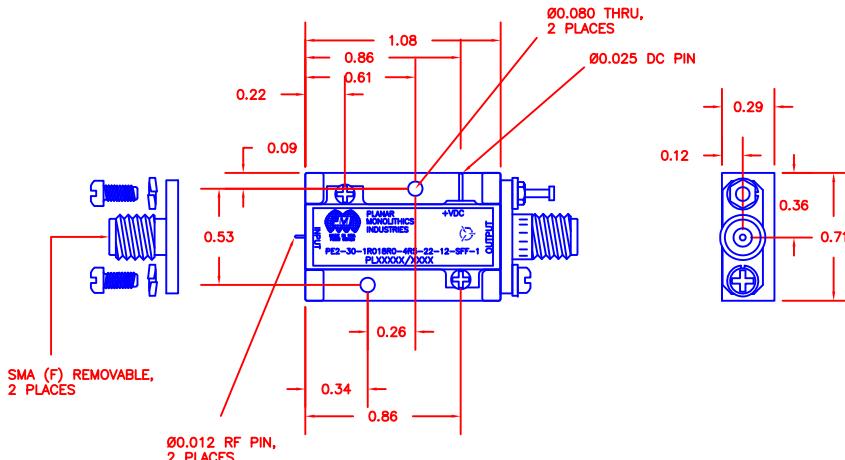


Features:

Internal Voltage Regulation
Unconditional Stability

Available Options:

Various Package types
Various Connector types
Temperature Compensation
Gain and Phase Matching
MIL-STD-883 Screening Available

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

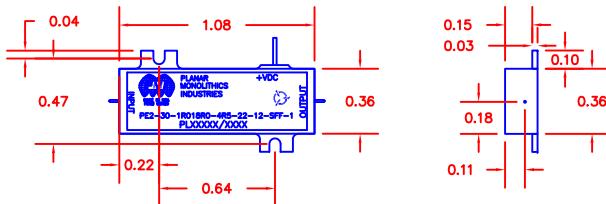

Environmental Ratings:

Temperature:	-54°C to + 95°C (Operating) -65°C to +125°C (Storage)
Humidity:	MIL-STD-202F, METHOD 103B COND B.
Shock:	MIL-STD-202F, METHOD 213B COND B.
Altitude:	MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle:	MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE		
DRAWN	sfk		09/05/13	PRODUCT FEATURE	PE2-30-1R018R0-4R5-22-12-SFF-1	
CHECKED				SIZE	FCM NO.	DWG NO.
ISSUED				A	05XQ0	27021121
		SCALE	N:S			REV. 1
						SHEET 1 OF 1