




HIGH POWER BRAZED ATTENUATOR

2J150030

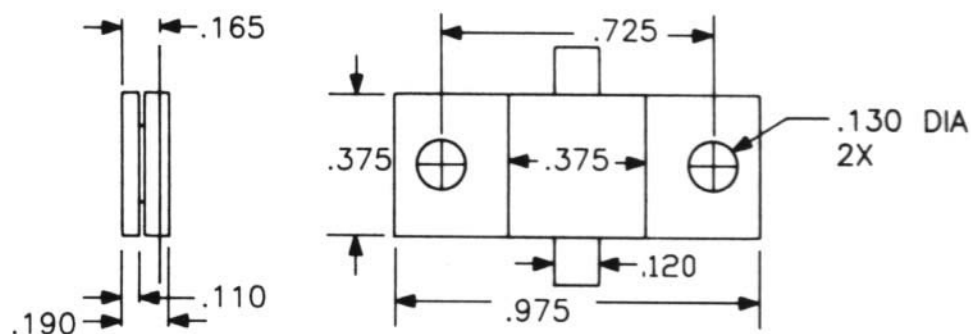

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N	2J150030	Substrate	BeO	Mechanical Tolerance	±.010"
Power (Watt)	150	Flange	Copper with Nickel Plating	Tolerance (dB)	DC – 1 GHz: ± .5 1-2 GHz: ± .1
Attenuation (dB)	3	Tab	Nickel with Silver plating	Power Handling	150@ 100°C 0 W @ 250 °C
Frequency (GHz)	2	Cover	Alumina	Construction	Brazed
VSWR	DC – .5 GHz: 1.25:1 .5 – 1 GHz: 1.35:1 1-2 GHz: 1.5:1	Resistive Element	NiChrome	RoHS Compliance	Yes

All dimensions are in inches. Minimum lead length 0.125". Other attenuation and tolerance values available.