


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

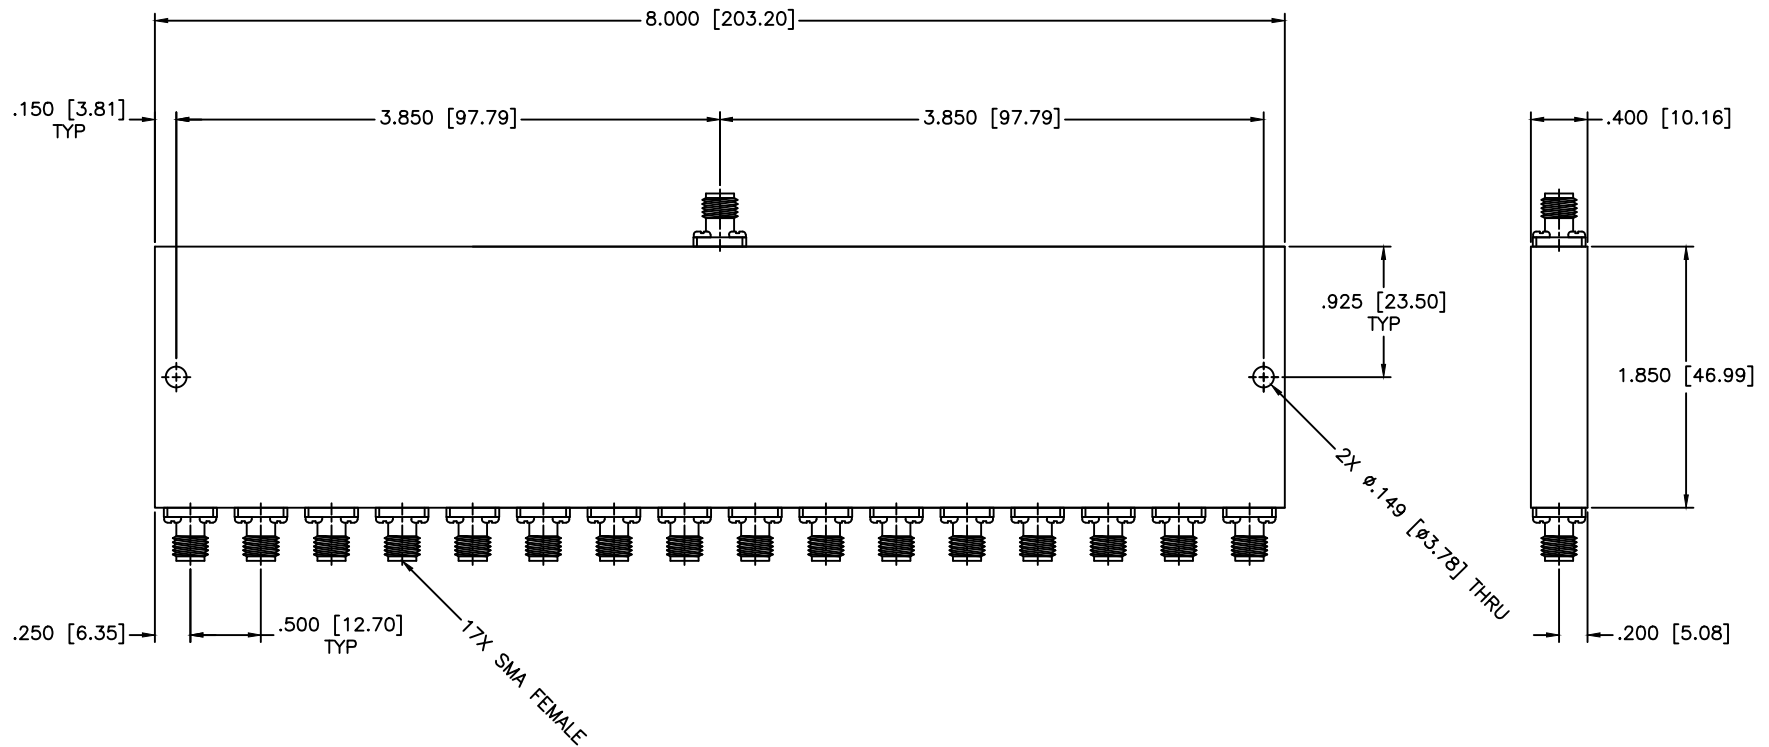

SPECIFICATIONS

Frequency Range: 15.75–16.25 GHz
 VSWR: 1.75:1 Max.
 Amplitude Balance: ± 1 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Insertion Loss: 3.9dB Max.
 Isolation: 15dB Min.
 Input Power: 30W (Load vswr @ 1.2)

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .008$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE: 16-WAY POWER DIVIDER		PART NO. PS16-5		
DRAWN: Paiboon Luekhamhan	DATE: 12-07-2006	CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING	DWG NO. 82076
APPROVED: T. Nguyen		DATE: 12-07-2006		