

Voltage Controlled Oscillator

ROS-2260W+

Wide Band 1290 to 2260 MHz

Features

- Wide band frequency range
- High power output, +9.2 dBm typ.
- Low phase noise
- Low pulling
- Low pushing
- Aqueous washable

Applications

- Wireless communications
- Digital TV / UHF band
- Radar receiver
- Satellite systems



CASE STYLE: CK605

PRICE: \$ 24.95 ea. QTY (5-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER				
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)		SENSI- TIVITY (MHz/V)	PORT CAP (pF)		3 dB MODULATION BANDWIDTH (MHz)	Typ.			Max.	Typ.	Max.	Vcc (volts)	Current (mA)
ROS-2260W+	1290	2260	+9.2	-74	-100	-121	-141	0.5	20	48	79	60	35	-90	-20	-10	1.5	1.8	5	45		

Pin Connections



RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	22V
All specifications	50 ohm system
Permanent damage may occur if any of these limits are exceeded.	

Outline Drawing

PCB Land Pattern

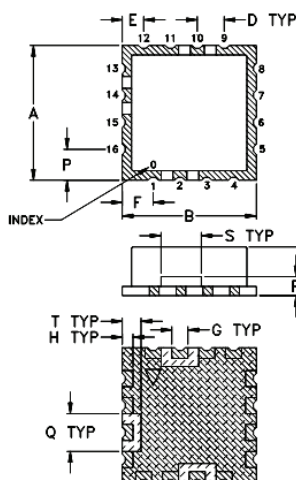

METALLIZATION
 SOLDER RESIST

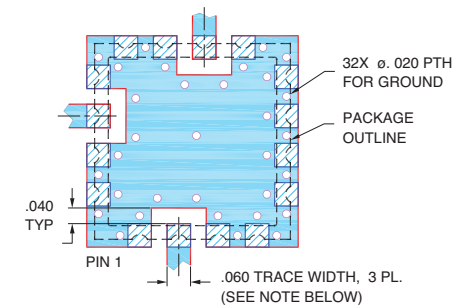 Demo Board MCL P/N: TB-10
 Suggested PCB Layout (PL-012)


- NOTES:
1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine

Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

 For detailed performance specs
 & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.







 REV. B
 M139652
 EDR-9165F1
 ROS-2260W+
 RAV
 121205
 Page 1 of 2

Performance Data & Curves*

ROS-2260W+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1775 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	104.10	1159.4	1142.3	1128.0	8.62	9.17	9.39	35.14	-15.8	-17.0	-30.2	0.65	0.89	-72.5	-98.6	-119.4	-139.1	1.0	-74.33
0.50	89.61	1210.0	1194.3	1181.5	8.59	9.23	9.51	35.33	-16.1	-17.5	-30.5	0.91	1.25	-75.2	-98.9	-119.7	-139.5	2.0	-83.53
1.00	83.37	1254.6	1239.1	1226.2	8.44	9.03	9.38	35.49	-15.8	-17.7	-30.0	1.09	1.19	-74.9	-98.9	-119.8	-139.5	3.5	-89.99
1.50	79.70	1296.3	1280.8	1267.9	8.71	9.29	9.47	35.65	-16.3	-18.4	-29.7	1.21	1.24	-74.5	-99.5	-120.4	-140.2	6.0	-95.71
2.00	77.47	1336.1	1320.7	1307.5	8.64	9.34	9.63	35.82	-16.6	-19.2	-29.3	1.35	1.31	-74.0	-100.0	-120.4	-140.4	8.5	-99.21
3.00	74.79	1413.0	1397.5	1384.1	8.63	9.36	9.69	36.14	-16.9	-20.4	-26.5	1.62	1.28	-74.8	-99.9	-120.9	-140.9	10.0	-100.89
4.00	73.31	1488.0	1472.0	1458.5	9.04	9.60	9.74	36.39	-18.1	-21.8	-25.7	1.87	1.45	-75.4	-100.1	-121.0	-141.1	20.8	-108.20
6.00	69.69	1631.3	1615.8	1602.2	9.17	9.73	9.84	36.81	-16.5	-24.0	-24.5	2.11	1.06	-75.2	-101.1	-121.9	-141.9	35.5	-113.09
7.00	68.17	1700.3	1684.8	1671.4	9.33	9.89	9.99	36.85	-16.2	-25.6	-24.1	2.17	1.27	-75.7	-100.5	-122.0	-141.9	60.7	-117.83
8.00	66.89	1767.4	1752.2	1739.0	9.22	9.54	9.58	36.83	-16.5	-26.4	-32.5	2.12	1.52	-74.1	-101.2	-122.5	-142.2	86.7	-121.20
8.50	65.74	1800.6	1785.7	1772.8	9.30	9.79	9.72	36.78	-16.8	-27.0	-36.4	2.07	1.56	-74.3	-101.0	-122.6	-142.4	100.0	-122.40
9.00	65.57	1833.4	1818.6	1805.9	9.25	9.74	9.75	36.78	-17.0	-27.5	-32.0	2.06	1.64	-74.4	-101.0	-122.7	-142.5	148.1	-125.84
10.00	65.10	1898.6	1883.9	1871.7	8.97	9.56	9.55	36.61	-18.0	-28.4	-28.7	1.86	1.35	-74.6	-100.8	-122.5	-142.7	177.0	-127.37
12.00	62.06	2026.0	2011.8	2000.0	8.62	9.22	9.24	36.34	-21.0	-32.5	-31.7	1.45	0.92	-72.2	-99.6	-121.7	-142.0	211.6	-128.92
14.00	56.44	2146.4	2132.6	2121.1	8.14	8.58	8.55	36.13	-26.8	-32.8	-34.2	0.97	1.90	-69.2	-98.1	-120.5	-140.9	302.4	-132.25
15.50	51.50	2229.1	2215.5	2204.2	7.57	8.15	8.14	36.00	-30.7	-35.7	-40.5	0.62	0.47	-70.7	-98.3	-120.3	-140.7	361.5	-133.78
16.00	49.89	2255.2	2241.2	2230.2	7.37	7.89	7.91	35.93	-31.3	-34.4	-43.5	0.52	2.38	-70.1	-97.9	-119.9	-140.6	507.5	-136.56
17.00	44.98	2303.6	2289.8	2278.8	7.41	7.87	7.74	35.86	-31.1	-49.7	-43.9	0.18	0.38	-70.6	-98.1	-120.2	-140.9	606.7	-138.22
18.50	36.60	2367.5	2353.4	2342.0	6.86	7.44	7.47	35.71	-29.0	-26.0	-48.3	0.17	0.38	-72.1	-98.3	-120.1	-140.6	851.6	-141.12
20.00	27.96	2417.9	2403.4	2392.2	6.43	7.03	7.05	35.61	-28.5	-25.2	-56.7	0.00	2.38	-73.3	-99.1	-120.7	-141.1	1000.0	-142.45

*at 25°C unless mentioned otherwise

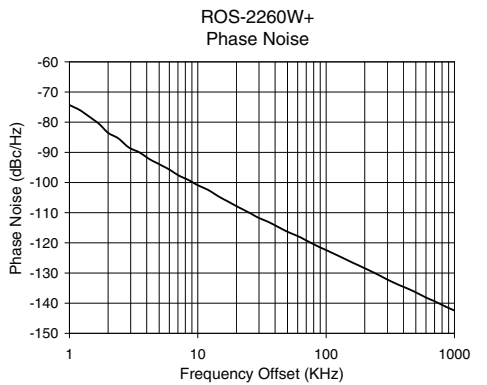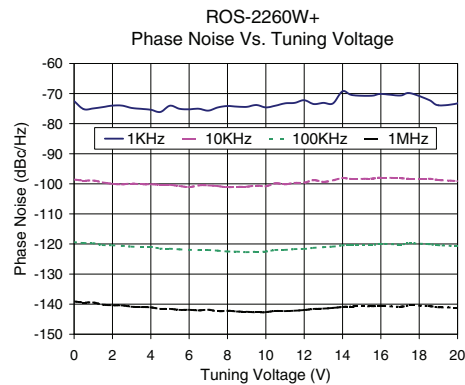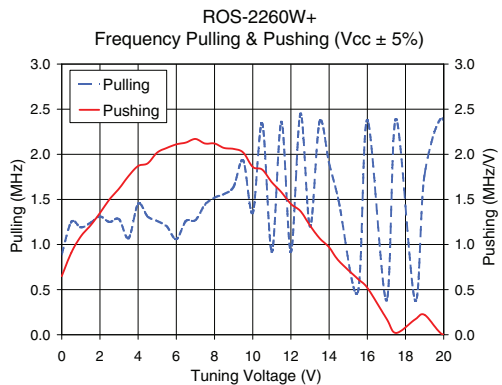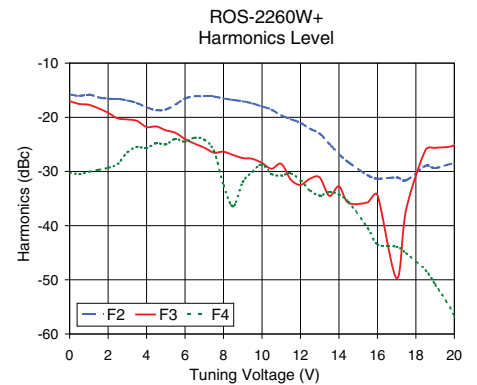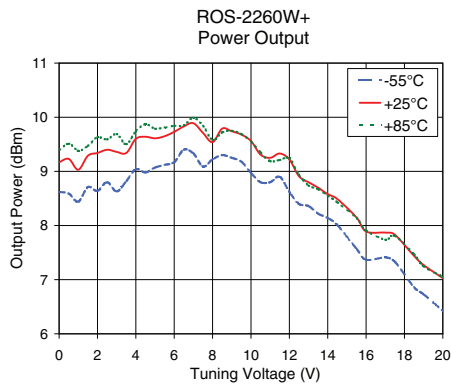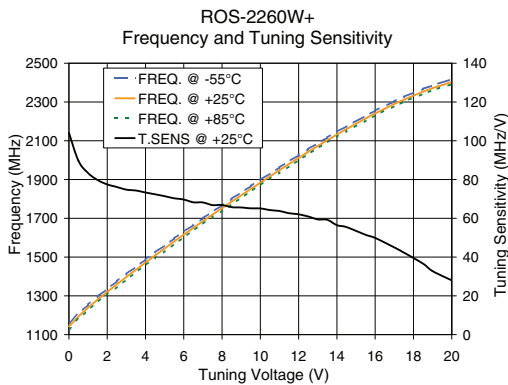

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.