

MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 326-1A
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	DSCC 94007 & 94008 REF.
FORCE TO ENGAGE (FULL, LIMITED, SMOOTH)	15.0, 10.0, 2.0 LBS. MAX.
FORCE TO DISENGAGE (FULL, LIMITED, SMOOTH)	5.0, 2.0, 0.5 LBS. MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	3.0 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	3.0 LBS. MIN.
CABLE RETENTION	10 LBS. MIN.
DURABILITY (FULL, LIMITED, SMOOTH)	100, 500, 1000 CYCLES MIN.
MASS	MASS = 0.47 GRAMS NOM.

ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	40.0 GHz
VSWR DC - 18.0 GHz	1.20:1 MAX.
18.0 - 26.5 GHz	1.35:1 MAX.
26.5 - 40.0 GHz	1.70:1 MAX.
INSERTION LOSS	0.08 √F (GHz)dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	975 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 3 GHz	-80 dB MIN.
3 - 18 GHz	-65 dB MIN.
CORONA	325 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL (5 MHz)	650 Vrms MIN.
CONTACT RESISTANCE (INNER)	6.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.



ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-65°C TO 165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%

MATERIALS AND FINISH	
BODIES, CONTACT, ANTI-ROCK RING, EMI SHIELD RING	BERYLLIUM COPPER, PER ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
INSULATOR	POLYPHENYLENE SULFIDE (PPS), PER ASTM-D-6358
DIELECTRIC STOP	TFE FLUOROCARBON PER ASTM-D-1710

APPLICATION	
CABLE(S)	142 SERIES
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

REV	DESCRIPTION	DATE	BY	APPVD	CHKD
A	INITIAL RELEASE - ECO 125245	5/11/2012	MJM	RS	CCF

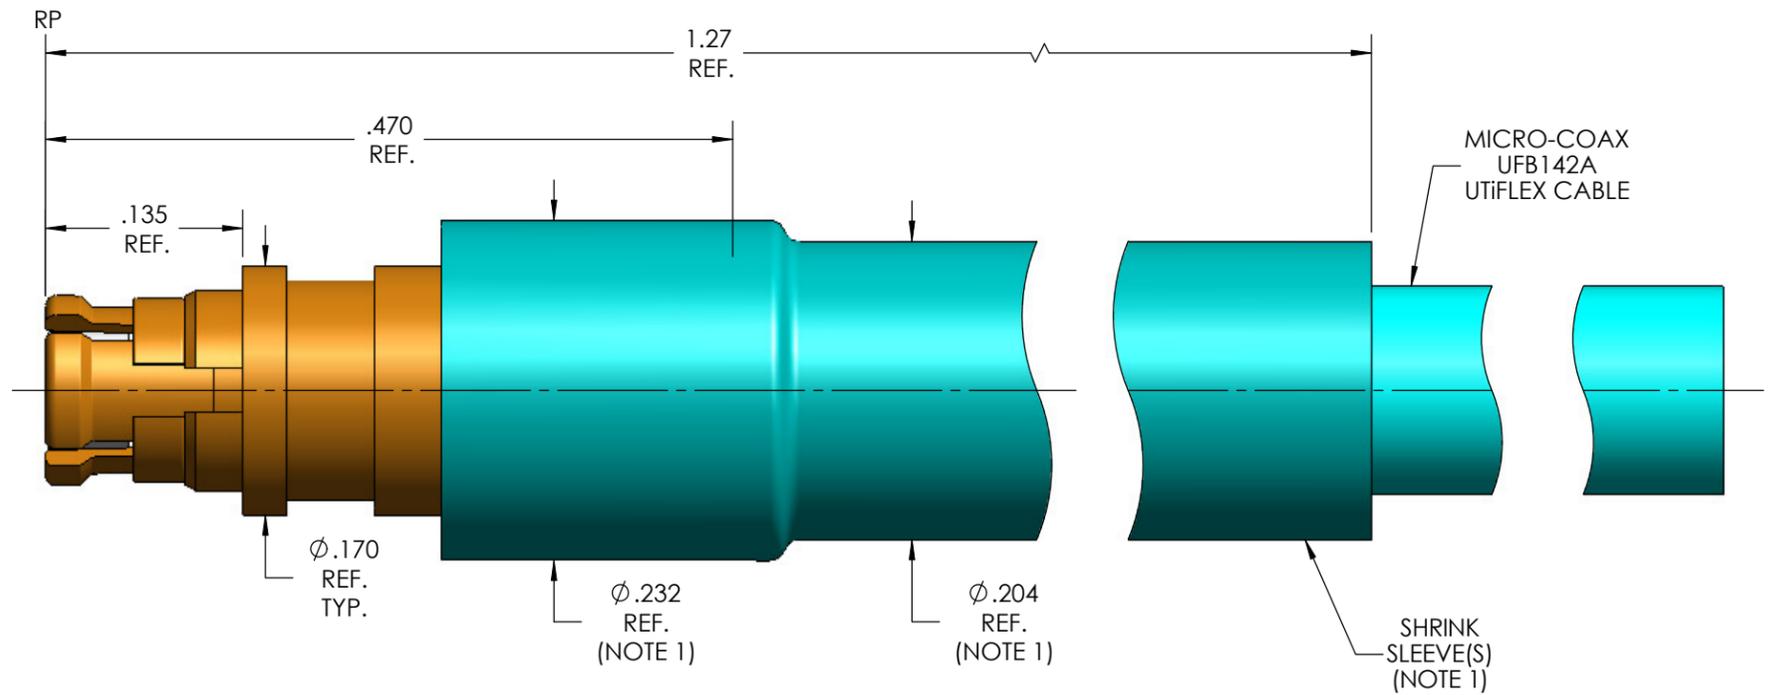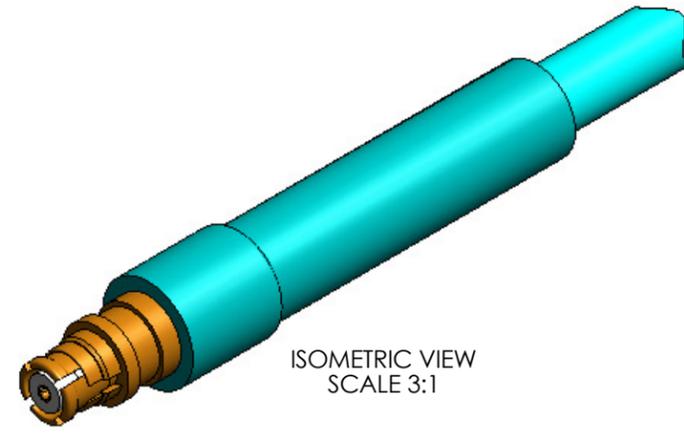

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.	INITIALS	DATE	<p>Leading the way in transmission line solutions. Copyright Micro-Coax, Inc.</p>					
	DWN. RDM	10/24/03						
	CHKD. MJM	5/8/12						
	APPVD.							
TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE		SMP SOCKET, UFB142A CABLE					
.XX ±.02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV
.XXX ±.005			64639	B	8:1	1 OF 1	SD903945	A
.XXXX ±.0010								
ANGLES ±5°								