


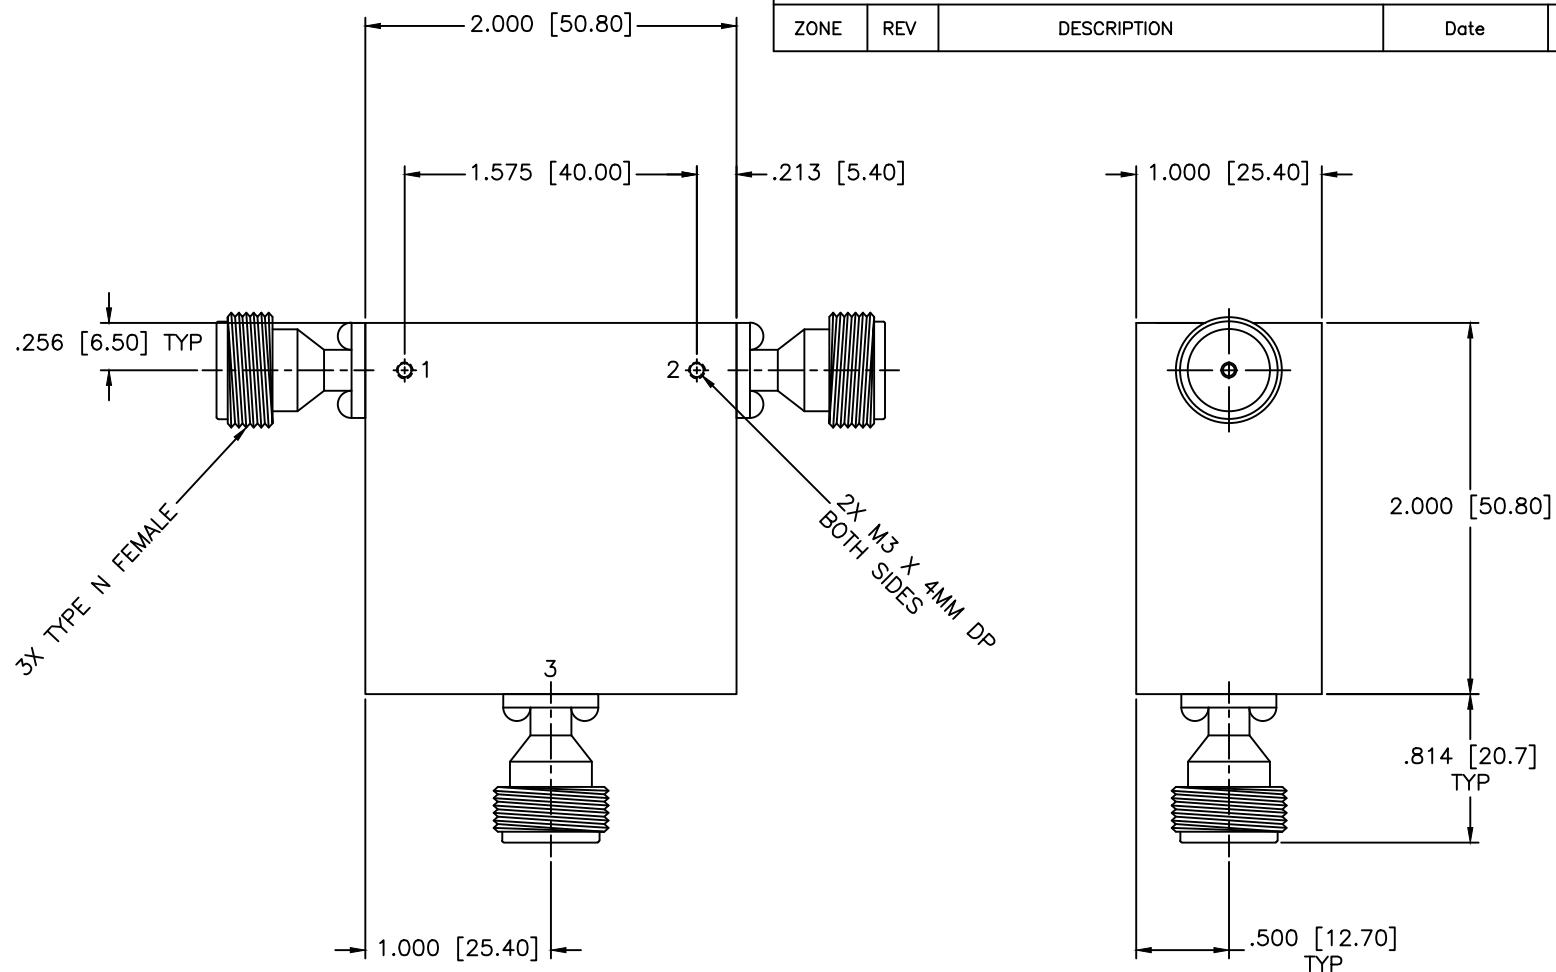

SPECIFICATIONS

Frequency Range: 800–960 MHz
 Isolation: 30dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.15:1 Max.
 Operating Temperature: +25° C
 Average Power: 100 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.1 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR			
		PART NO. CS-167/NF			
DRAWN: Paiboon Luethamhan DATE: 10-06-2011		CAGE CODE: OD2L5		SIZE: A	REV: N/A
APPROVED: T. Nguyen DATE: 10-06-2011		DO NOT SCALE THE DRAWING		DWG NO. 85906	