

## MECHANICAL CHARACTERISTICS

INTERFACE	MIL-STD-348, FIGURE 310-2
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	MIL-PRF-39012/57 REF.
RECOMMENDED MATING TORQUE	9 IN-LBS. NOM.
FORCE TO ENGAGE	2 IN-LBS. MAX.
FORCE TO DISENGAGE	2 IN-LBS. MAX.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MIN.
CENTER CONTACT INSERTION (FROM CABLE)	2 LBS. MAX
CENTER CONTACT WITHDRAW (FROM CABLE)	1 Oz. MIN.
CABLE RETENTION	20 LBS. MIN.
MASS	3.10 GRAMS NOM.

## ELECTRICAL CHARACTERISTICS

IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 18 GHz	1.16:1 MAX.
INSERTION LOSS	0.03 $\sqrt{f}$ (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	900 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	230 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	600 Vrms MIN.
CONTACT RESISTANCE (INNER)	4.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.


## ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE	-100°C TO 150°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%

## MATERIALS AND FINISH


CONTACT & BODY	BERYLLIUM COPPER, ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290
INSULATOR	TFE FLUOROCARBON PER ASTM-D-1710
DIELECTRIC BEADS	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205
CABLE(S)	311 SERIES CABLE
INSTALLATION	PER CONFIGURATOR

**THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.**

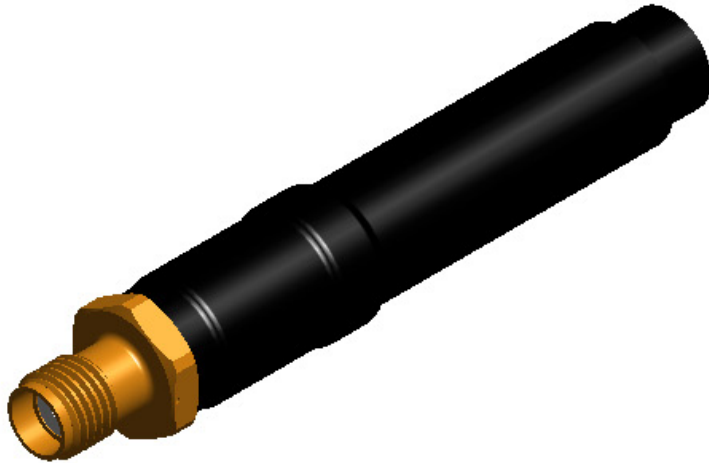

ISOMETRIC VIEW  
SCALE 2:1

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	1/6/2005	JMK	RS
B	ECO 115330	6/3/2011	MJM	RS
C	ECO 125640	12/6/2012	MJM	RS
C1	ECO 135510	10/24/2013	MJM	RS

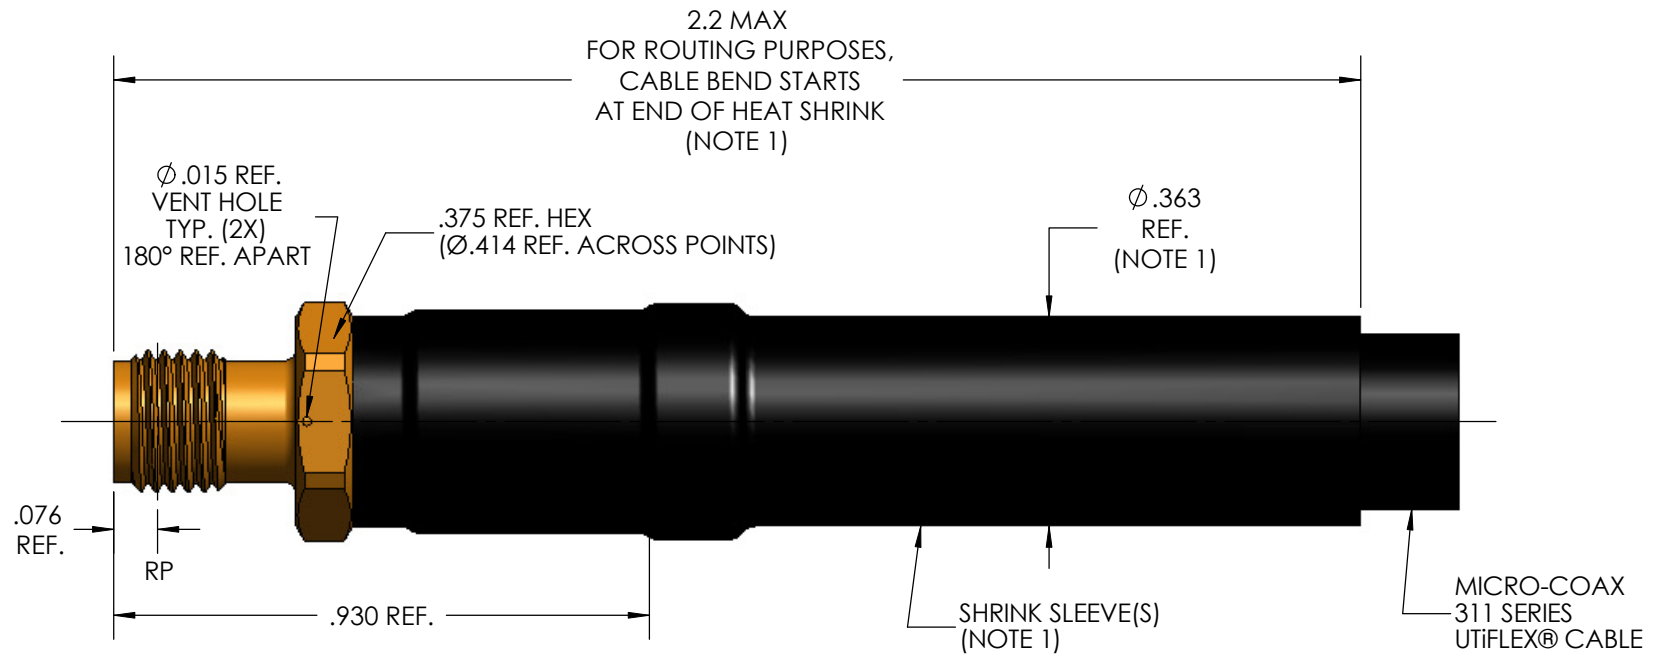

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.
2. ALL SPECIFICATIONS LISTED ON THIS DRAWING WILL ALSO APPLY TO CONNECTOR 904119-EM (EQUIPMENT MODEL).

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.	INITIALS		DATE		<div>MICRO-COAX</div> <div>PROVEN RELIABLE</div>				
	DWN.	JMK	9/14/04						
	CHKD.	CCF	6/13/11						
	APPVD.								
TOLERANCES UNLESS OTHERWISE SPECIFIED	TITLE								
SMA JACK, 311 SERIES CABLE, VENTED, SPACE GRADE									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV
.XXX	± .005			64639	B	3:1	1 OF 1	SD904119	C1
.XXXX	± .0010								
ANGLES	± 2°								