
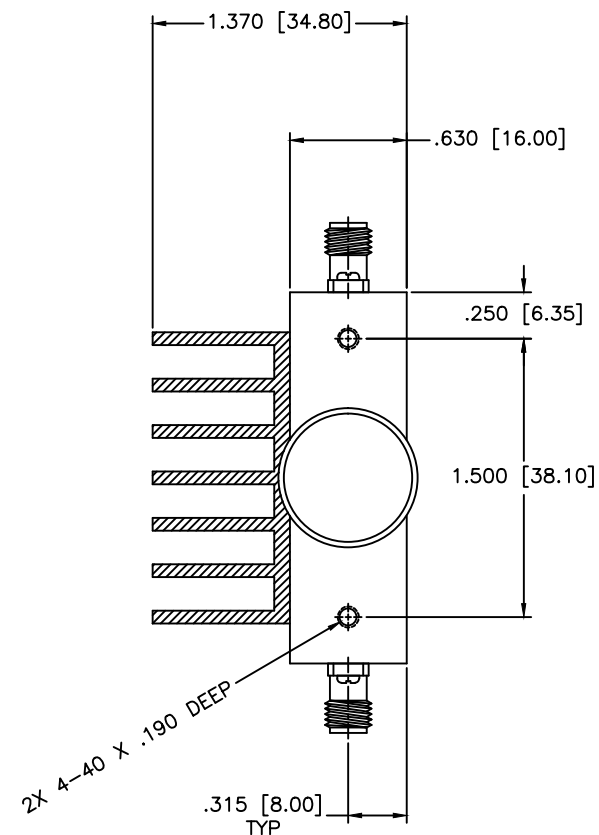


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

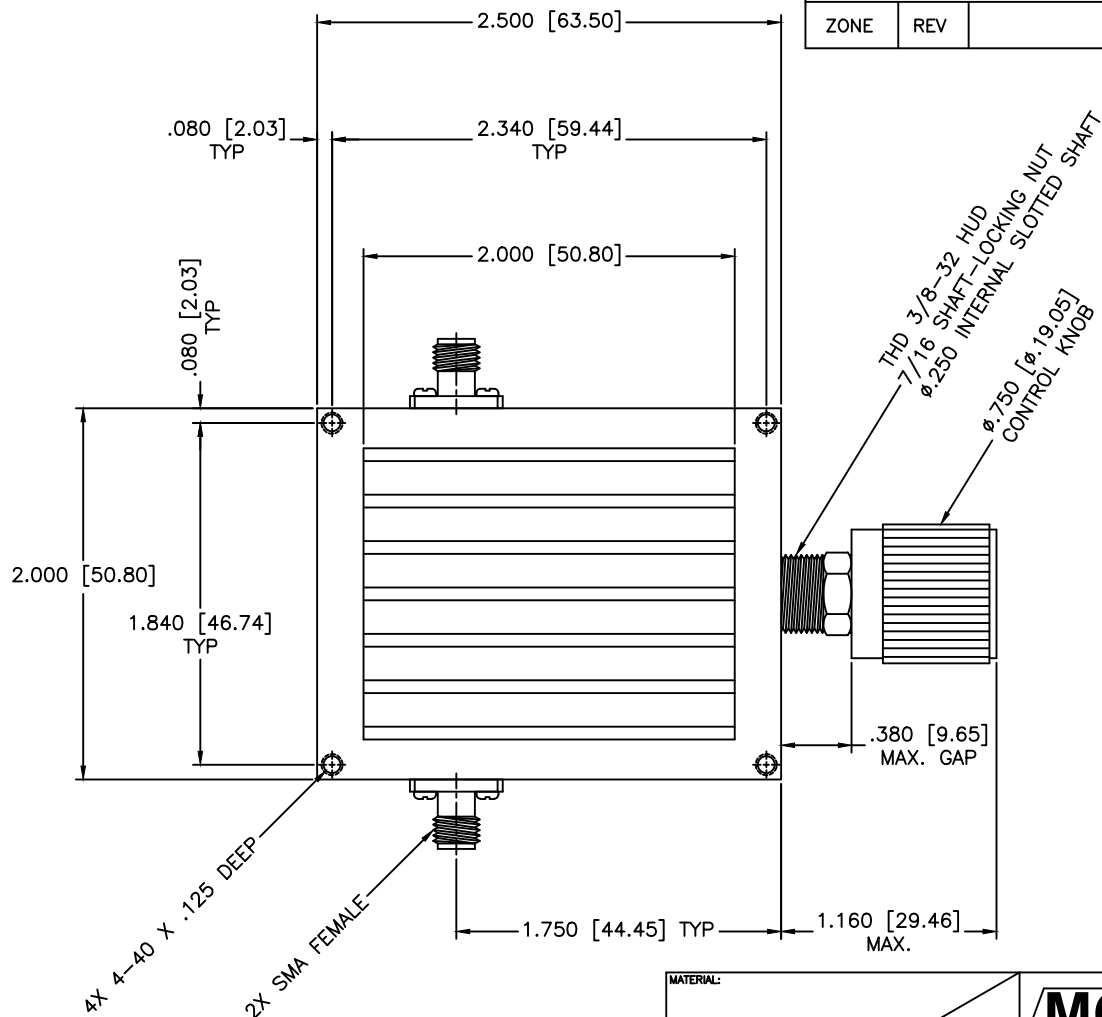

SPECIFICATION

Frequency Range: 0.5-1.0 GHz
Attenuation: 6dB
Insertion Loss: 0.5 Max.
VSWR: 1.50:1 Max.
RF Power: 30W Average, 5kW Peak

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:

N/A

SHEET:

N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: ± 0.015
ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:

CONTINUOUSLY VARIABLE ATTENUATOR, HIGH POWER

PART NO.

HA30-1-6

DRAWN:

Pai boon Luekhamhan

DATE:

02-10-2011


APPROVED:

T. Nguyen

DATE:

02-10-2011

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



CAGE CODE:

0D2L5

SIZE:

A

REV:

N/A

DWG NO.

85481

DO NOT SCALE THE DRAWING