


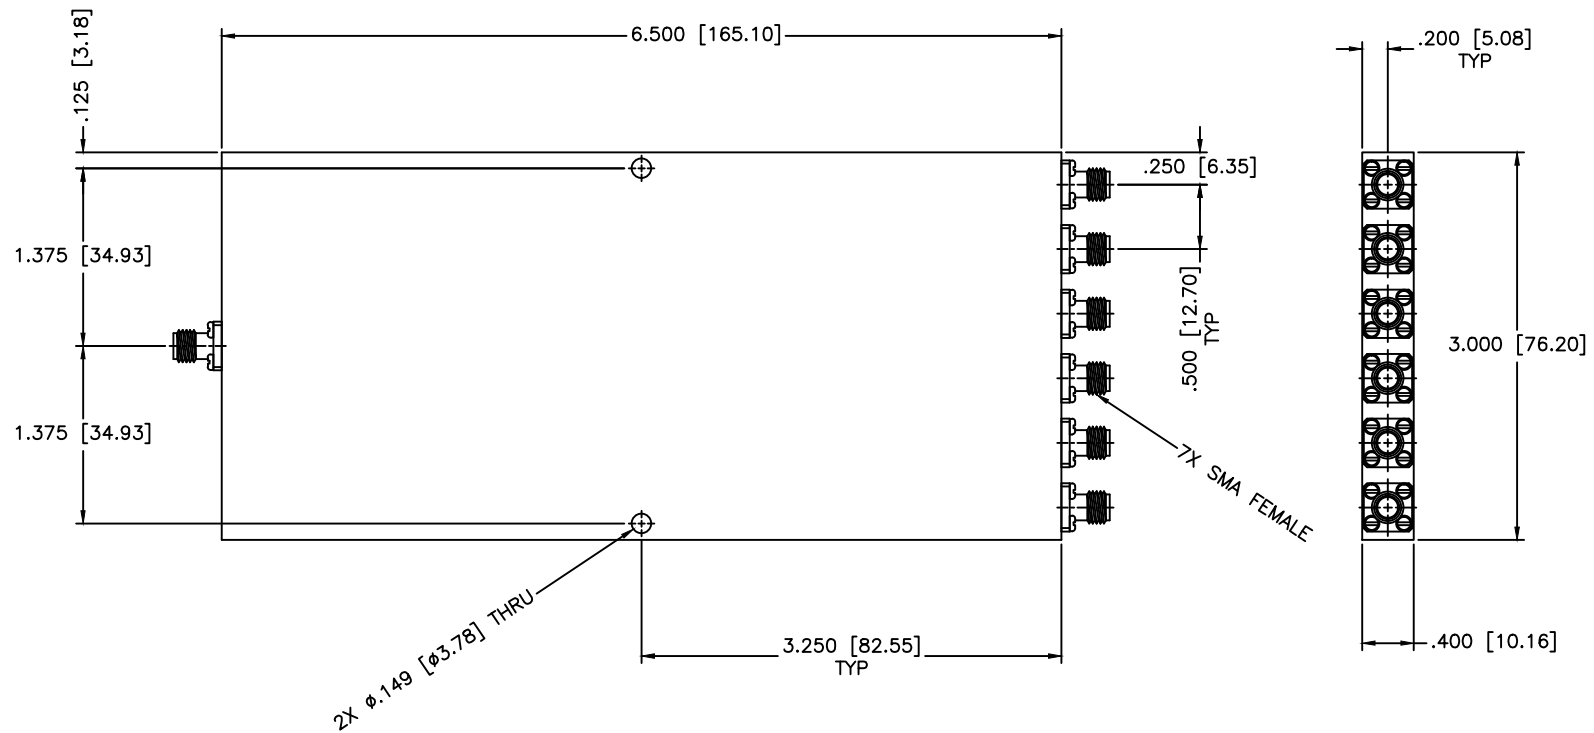

SPECIFICATIONS

Frequency Range: 2–6 GHz
 Insertion Loss: 1.6dB Max.
 Isolation: 17dB Min.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 1.75 dB Max.
 VSWR In/Out: 1.60:1/1.50:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 6-WAY POWER DIVIDER		
DRAWING: Pailboon Luekhamhan DATE: 09-04-2001		PART NO.: PS6-43		
APPROVED: T. Nguyen DATE: 09-04-2001		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 81838