


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

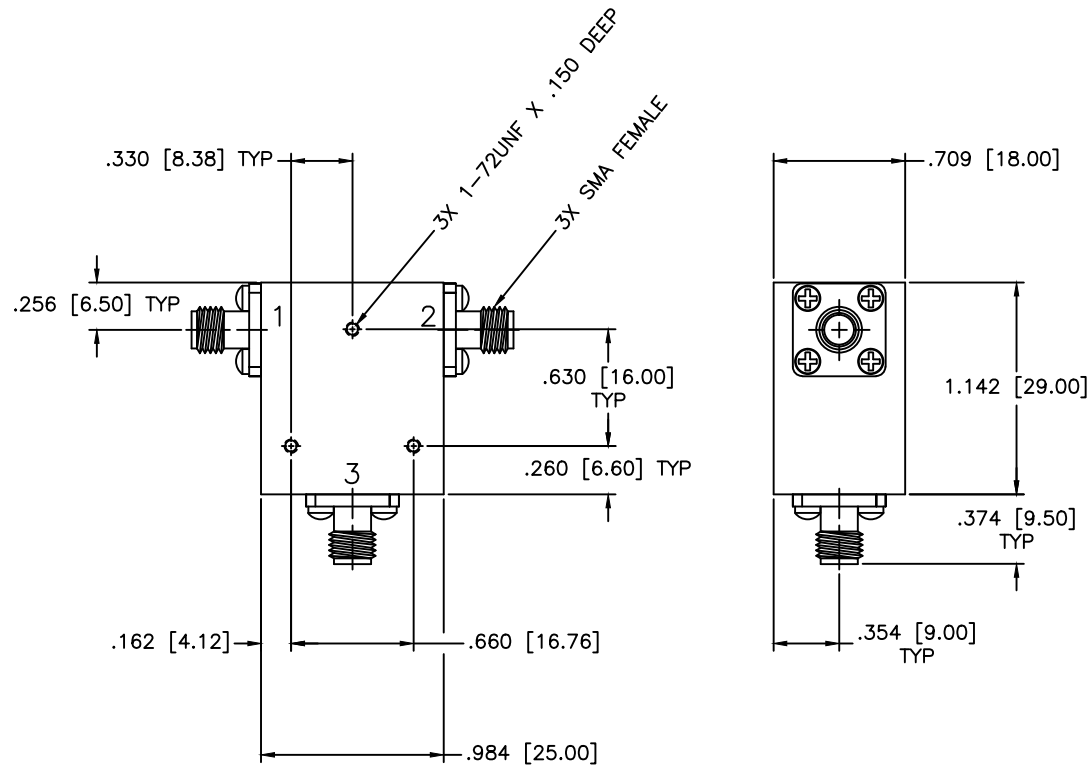

SPECIFICATIONS

Frequency Range: 4.40–5.00 GHz
 Isolation: 23dB Min.
 Insertion loss: 0.20dB Max.
 VSWR: 1.15:1 Max.
 Power: 25 Watts
 Operating Temperature: –30°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.05 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR			
		PART NO. CS-181			
DRAWN: Paiboon Luekhamhan	DATE: 01-30-2012	CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 85985
APPROVED: T. Nguyen	DATE: 01-30-2012	DO NOT SCALE THE DRAWING			