



RP TNC Male Right Angle Connector Clamp/Solder Attachment For RG213, RG214, RG8, RG9, RG225, RG393

TECHNICAL DATA SHEET

PE4675

RP TNC Male Right Angle Connector Clamp/Solder Attachment For RG213, RG214, RG8, RG9, RG225, RG393

Configuration

Connector TNC Male Reverse Polarity

Connector Specification MIL-C-39012

Connector Interface Type RG213,RG214,RG8,RG9,RG225,RG393

Cable Attachment Method (Shield/Contact)

Clamp/Solder

Body Style

Right Angle

Electrical Specifications

Impedance, Ohms 50

Mechanical Specifications

Temperature

Operating Range, deg C -65 to +165

Size

 Length, in [mm]
 1.84 [46.74]

 Width/Dia., in [mm]
 0.75 [19.05]

 Height, in [mm]
 1.16 [29.46]

 Weight, lbs [q]
 0.165 [74.84]

Connector

Type TNC Male Reverse Polarity

Contact Material and Plating
Contact Plating Specification
Coupling Nut Material and Plating
Body Material and Plating
Dielectric Type
Silver
QQ-S-365
Brass, Nickel
Brass, Nickel
Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Plotted and Other Data

Notes: Values at 25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: RP TNC Male Right Angle Connector Clamp/Solder Attachment For RG213, RG214, RG8, RG9, RG225, RG393 PE4675

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.







RP TNC Male Right Angle Connector Clamp/Solder Attachment For RG213, RG214, RG8, RG9, RG225, RG393

TECHNICAL DATA SHEET

PE4675

RP TNC Male Right Angle Connector Clamp/Solder Attachment For RG213, RG214, RG8, RG9, RG225, RG393 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: RP TNC Male Right Angle Connector Clamp/Solder Attachment For RG213, RG214, RG8, RG9, RG225, RG393 PE4675

URL: http://www.pasternack.com/tnc-male-reverse-polarity-rg213-rg214-rg8-rg9-rg225-rg393-connector-pe4675-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

ISO 9001 : 2008 Registered


M	MATERIALS
BODY	BRASS NICKEL PLATED
CONTACT	SILVER PLATED
INSULATOR	PTFE

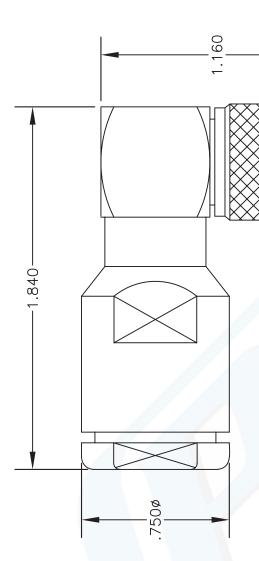


ASSEMBLY PROCEDURES

1. SLIDE CLAMP NUT (1) & GASKET (2) OVER CABLE. STRIP CABLE AS SHOWN. DO NOT NICK BRAID WHILE CUTTING JACKET. TAPER END OF BRAID TO PERMIT ASSEMBLY OF BRAID CLAMP (3) SLIDE BRAID CLAMP(3) OVER BRAID & SEAT AGAINST CABLE.

-.590¢-



2. FORM BRAID OVER CLAMP NUT (3). TRIM BRAID BACK TO SHOULDER. CUT DIELECTRIC TO DIMENSION SHOWN. DO NOT NICK CENTER CONDUCTOR. SOLDER CONTACT TO CENTER CONDUCTOR. REMOVE EXCESS SOLDER. DO NOT OVER HEAT DIELECTRIC. INSERT CABLE ASSEMBLY INTO BODY & TIGHTEN.



PASTERNACK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623 PHONE (949) 261-1920 FAX (949) 261-7451

E-MAIL ADDRESS: sales@pasternack.com WEB ADDRESS: www.pasternack.com

COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES® ESTABLISHED 1972

REVERSE POLARITY TNC MALE, RIGHT ANGLE, CLAMP ATTACHMENT FOR RG8, RG213, RG214, RG225 & RG393

127

SCALE N/A

CAD FILE 053102

SIZE A FSCM NO. 53919

PE4675

NOTES

- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
- 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.