




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

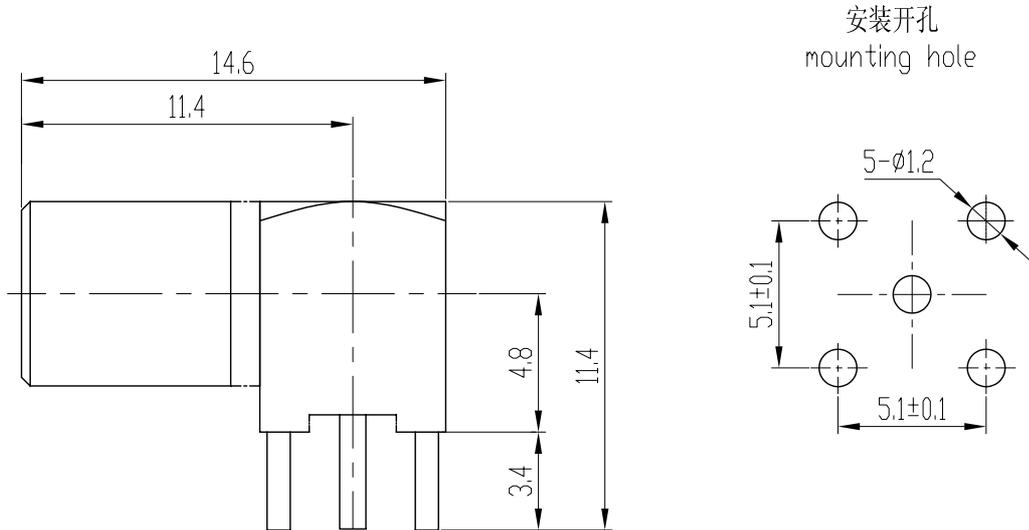

产品型号 type	备注 remark
SMB-KWHD	
SMB-KWHD A	with dustproof cap(带防尘帽)

Electrical Characteristics:

- 1.Characteristic Impedance: 50 Ω
- 2.Frequency range: DC~3Ghz
- 3.Contact resistance
Center conductor: ≤6.0 mΩ
Out conductor: ≤1.0 mΩ
4. Insulation resistance: ≥1000MΩ
5. Insulator withstanding: 750V
6. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~3Ghz
3. 接触电阻:
中心导体: ≤6.0 mΩ
外导体: ≤1.0 mΩ
4. 绝缘电阻: ≥1000MΩ
5. 介质耐压: 750V
6. 插拔次数: 500次

Application: MIL-C-39012/68A

执行标准: MIL-C-39012/68A

Material&Finishing

- 1.Center contact:
Female:beryllium copper, gold plated
- 2.Body:brass, gold plated
3. Insulators:PTFE

材料和镀层

1. 中心接触件:
插孔: 镀青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

	SCALE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	4:1	
	NAME	SMB-KWHD RF COAXIAL CONNECTOR
	DATE	
DRAWN		
CHECKED		
APPROVED		西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.