

4

3

2

1

MECHANICAL

CONTACT: BREAK BEFORE MAKE
ACTUATOR: LATCHING
SWITCHING SPEED: 20 mSEC MAX

ELECTRICAL

ACTUATOR VOLTAGE: 28.0±3.0 Vdc
ACTUATOR CURRENT: 0.200 A MAX @ 28.0 Vdc
POWER HANDLING: 350W CW @ 1.0 GHz



ENVIRONMENTAL

OPERATING TEMP: -54°C TO +90°C
SINE VIBRATION: 30 G'S rms
LIFE: 1,000,000 CYCLES
RANDOM VIBRATION: 20G'S rms

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATION:

FREQUENCY RANGE (GHz): DC-2.0
 VSWR (Max.): 1.20:1
 INSERTION LOSS (dB): 0.20
 ISOLATION (dB): 80
 IMPEDANCE (Ohms): 50

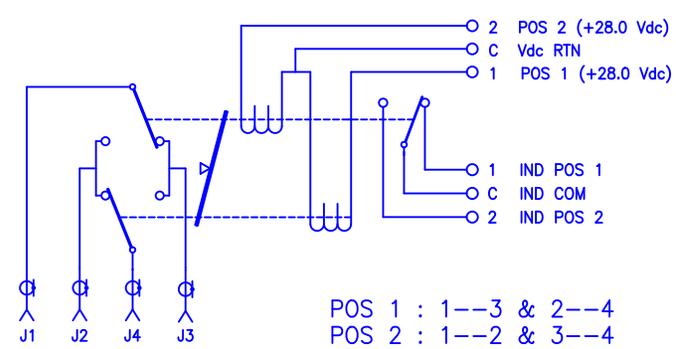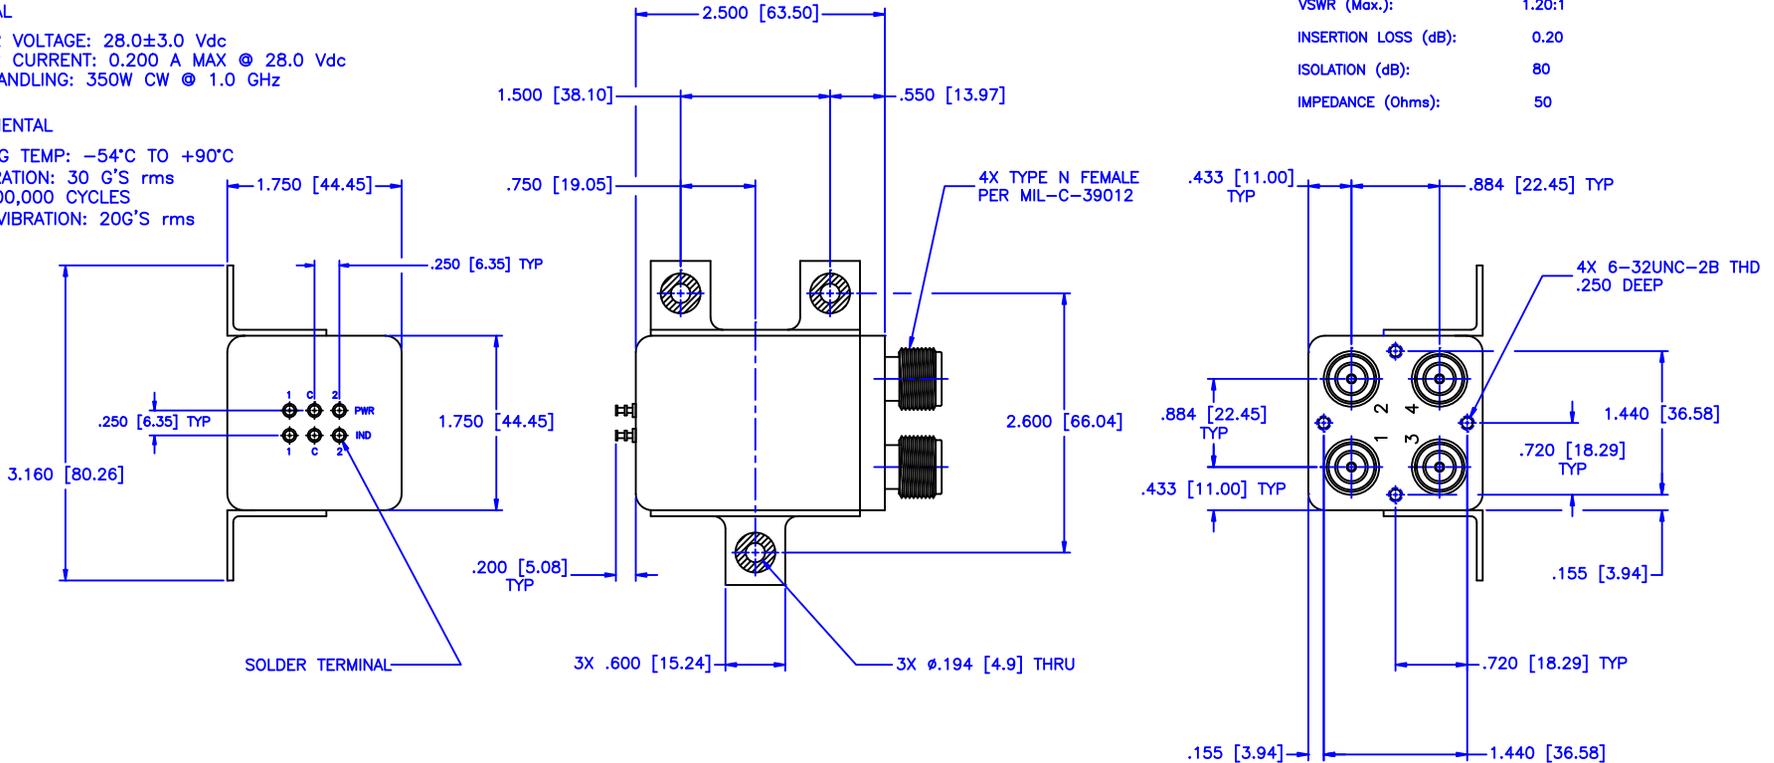

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			SHEET: N/A
DRAWN: Paiboon Luexhaman		DRAWING TITLE: ELECTROMECHANICAL SWITCHES	
DATE: 02-18-2009		PART NO. C2-2-LI	
APPROVED: T. Nguyen		CAGE CODE: OD2L5	
DATE: 02-18-2009		SIZE: C	
PERMISSIVE NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV: N/A	
THIRD ANGLE PROJECTION 		DWG NO. 84161	
		DO NOT SCALE THE DRAWING	

4

3

2

1