


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

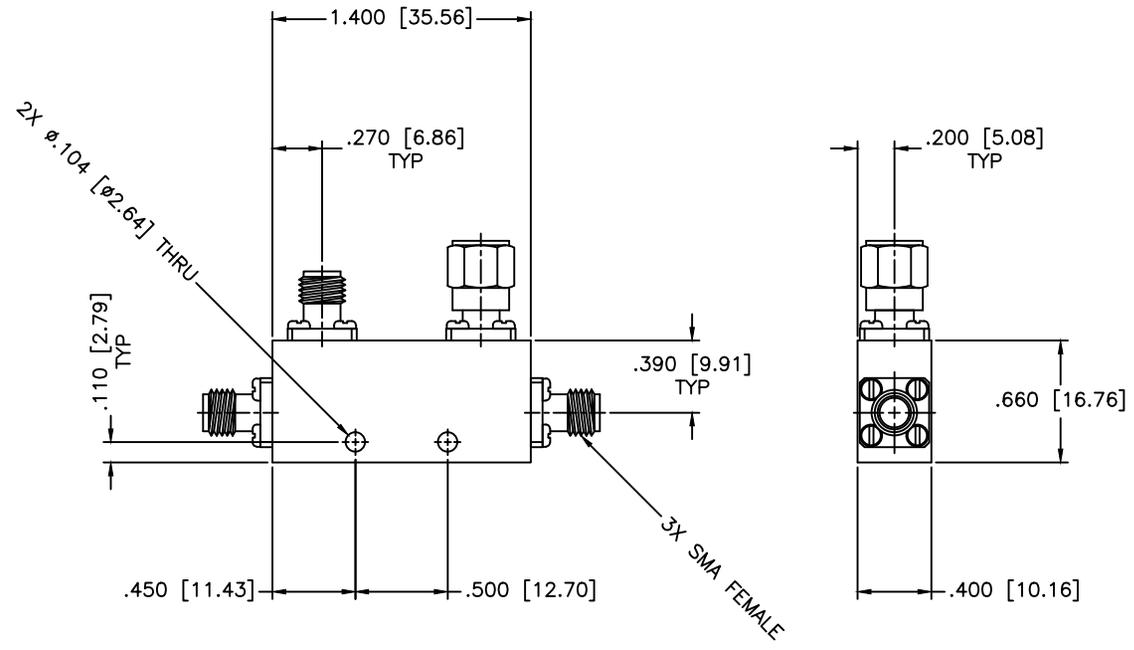

SPECIFICATIONS

- Frequency Range: 6–18 GHz
- Coupling: 20±1.0dB
- Frequency Sensitivity: ±0.5dB
- Insertion Loss: 0.9dB Max.
- Directivity: 15dB Min.
- VSWR: 1.40:1 Max.
- Power: 20W Avg, 1kW Peak

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-21-1997
APPROVED: T. Nguyen	DATE: 11-21-1997

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	DIRECTIONAL COUPLER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	CB10-20	
CAGE CODE:	SIZE:	REV:	DWG NO.	80541
OD2L5	A	N/A	DO NOT SCALE THE DRAWING	

