


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

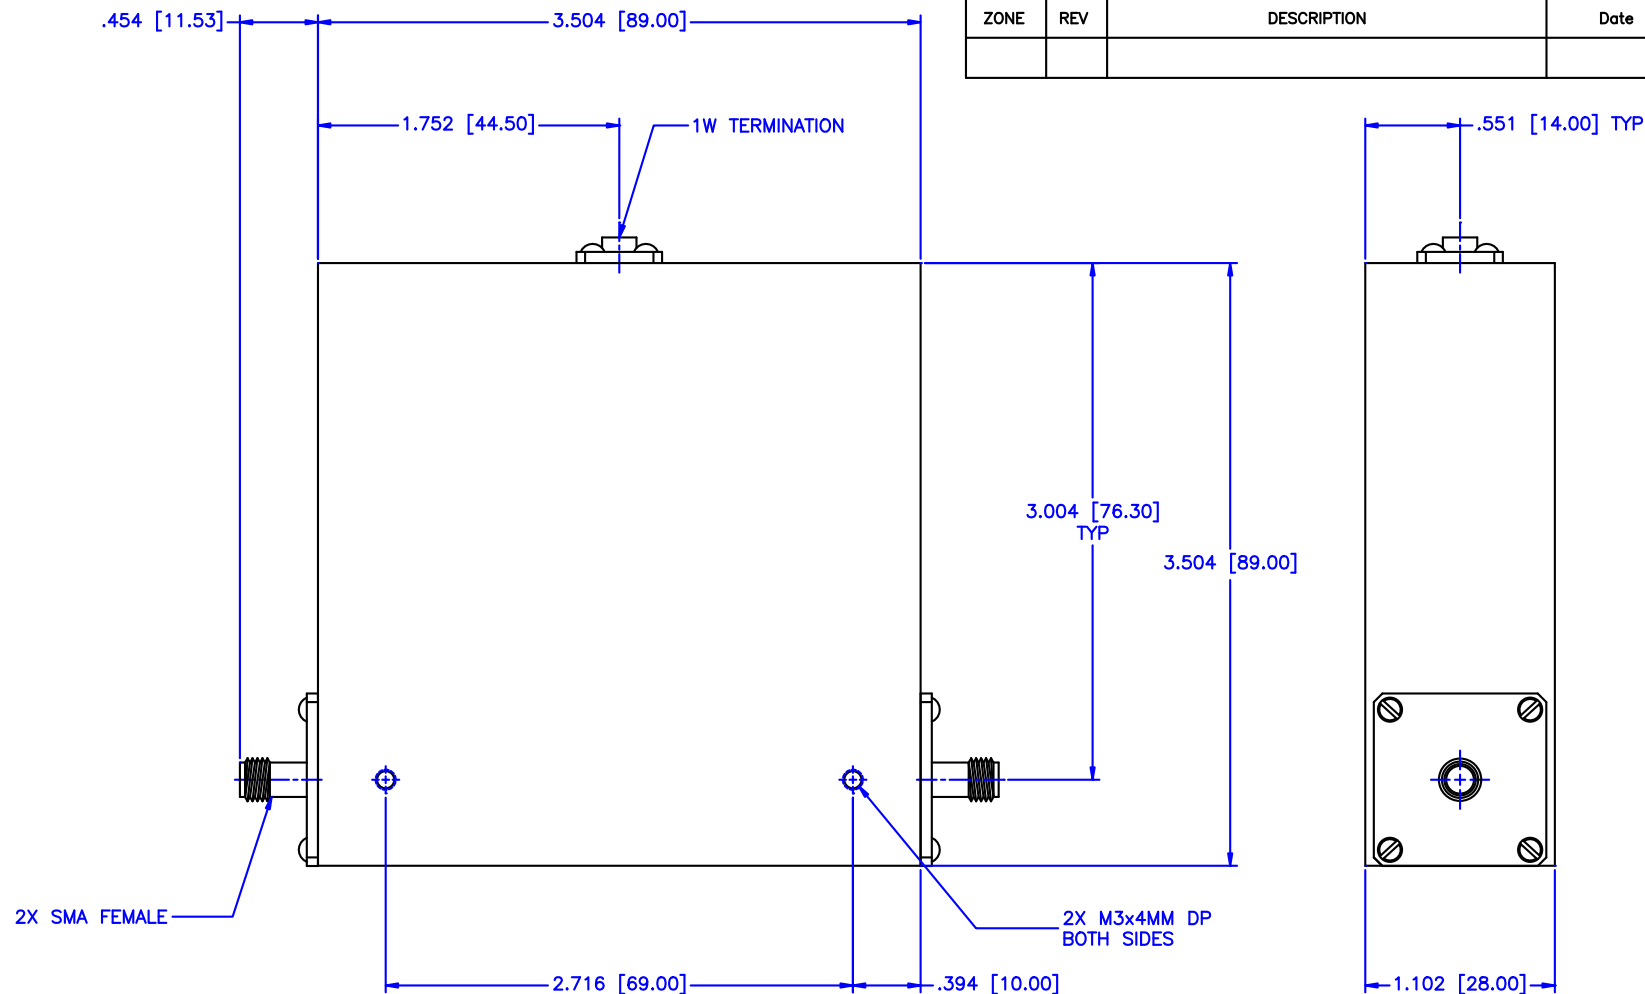

SPECIFICATIONS

Frequency Range: 0.85–2.5 GHz
 Isolation: 12dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.70:1 Max.
 Power Avg, Peak: 1W, 100W
 Operating Temperature: +10°C to +40°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 02-24-2006		DRAWING TITLE: CIRCULATOR, ISOLATOR		
APPROVED: T. Nguyen DATE: 02-24-2006		PART NO. IS-41		
CAGE CODE: 0D2L5		SIZE: N/A	REV: N/A	DWG NO. 82506
		DO NOT SCALE THE DRAWING		