

D
C
B
A

D
C
B
A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

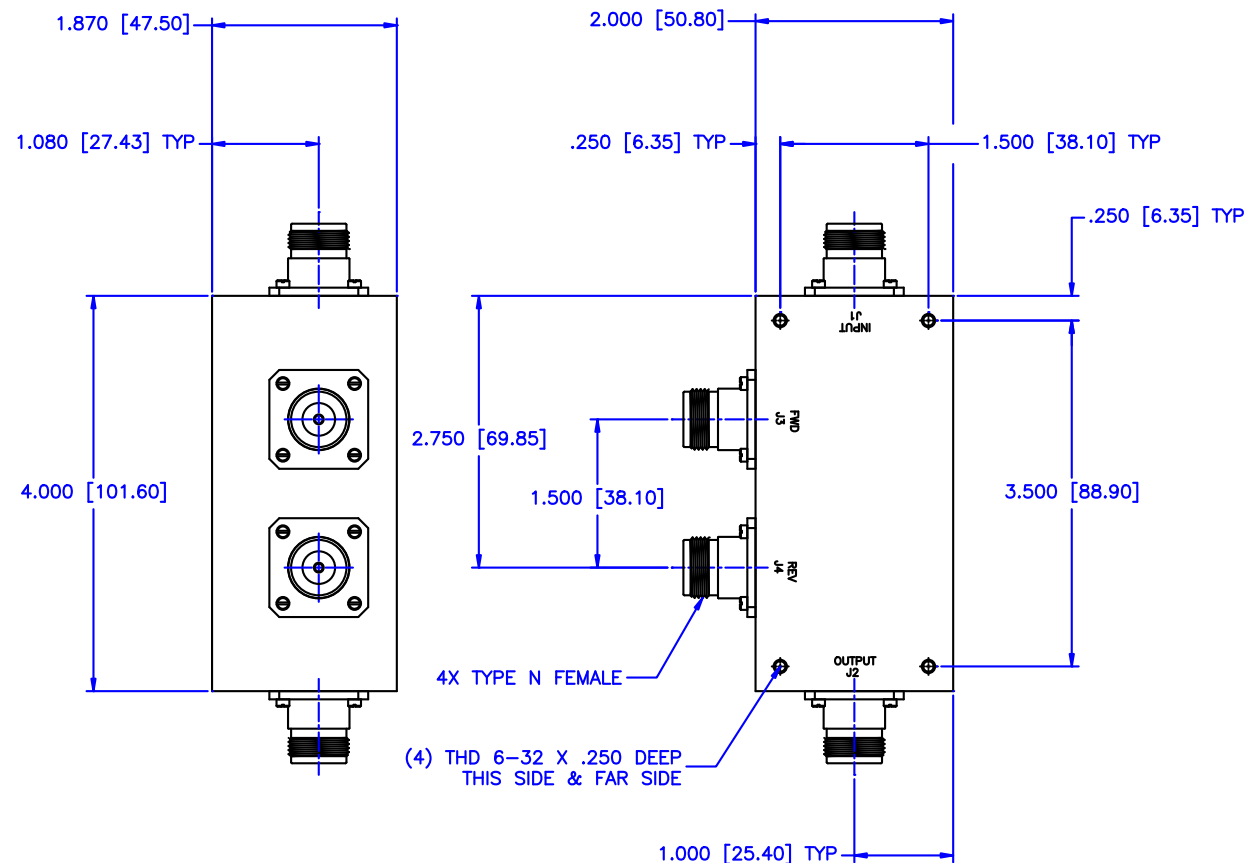

SPECIFICATIONS

FREQUENCY RANGE: 20-200 MHz
FREQUENCY SENSITIVITY: ± 0.50 dB
INSERTION LOSS: 0.3 dB Max.
DIRECTIVITY: 20 dB Min.
VSWR PRIME LINE: 1.10:1 Max.
POWER: 250 Watts

MATERIAL:	
DRAWN:	Paiboon Luekhamhan
DATE:	03-27-1999
APPROVED:	T. Nguyen
DATE:	03-27-1999

MCLI UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$ PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER		SHEET:	N/A
PART NO.		HDL-6-30			
CAGE CODE:		SIZE:	C	REV:	N/A
DWG NO.		81242			
OD2L5		DO NOT SCALE THE DRAWING			

4

3

2

1