


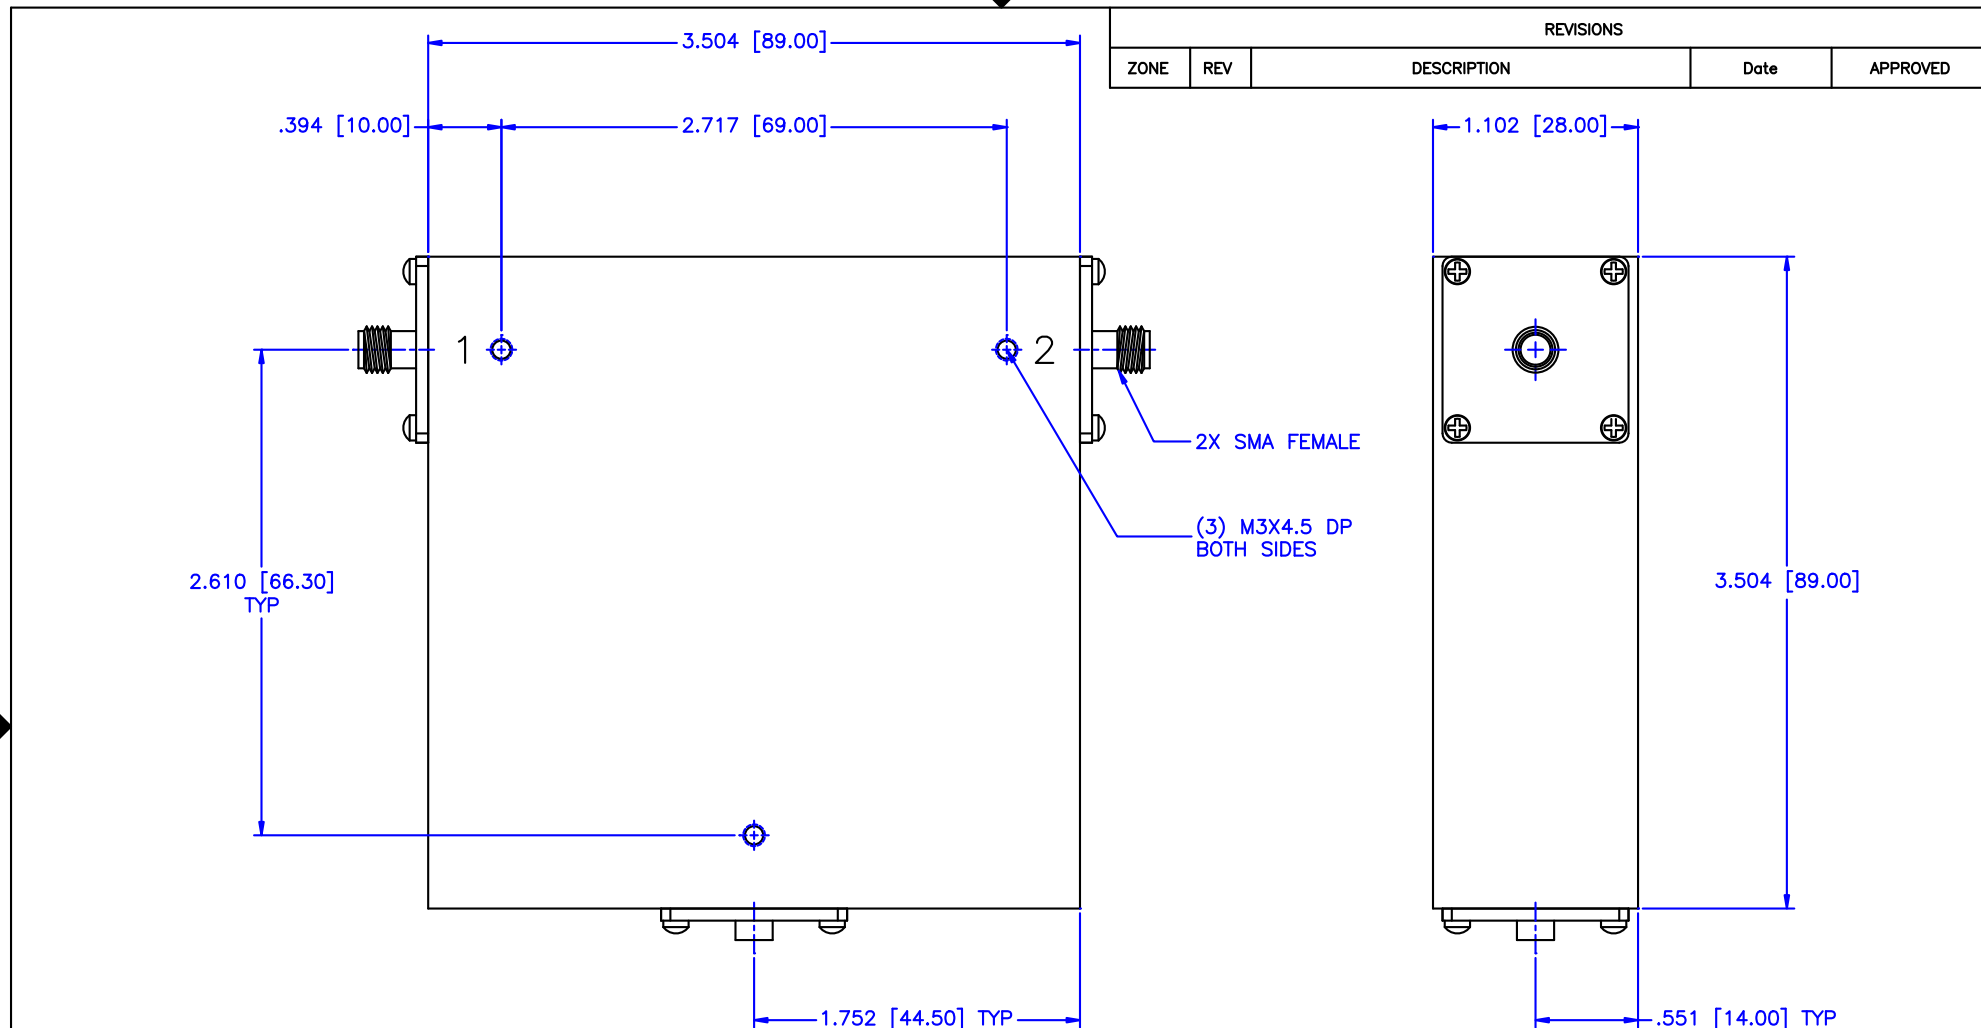

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

SPECIFICATIONS:

Frequency Range: 0.80–2.50 GHz
 Operating Temperature: +10°C to +40°C
 Isolation: 12dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.70:1 Max.
 Circulator Power: 25 Watts

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 08-30-2010		DRAWING TITLE: COAXIAL ISLATOR		
APPROVED: T. Nguyen DATE: 08-30-2010		PART NO. IS-130		
CAGE CODE: 0D2L5		SIZE: N/A	REV: N/A	DWG NO. 85042
		DO NOT SCALE THE DRAWING		