



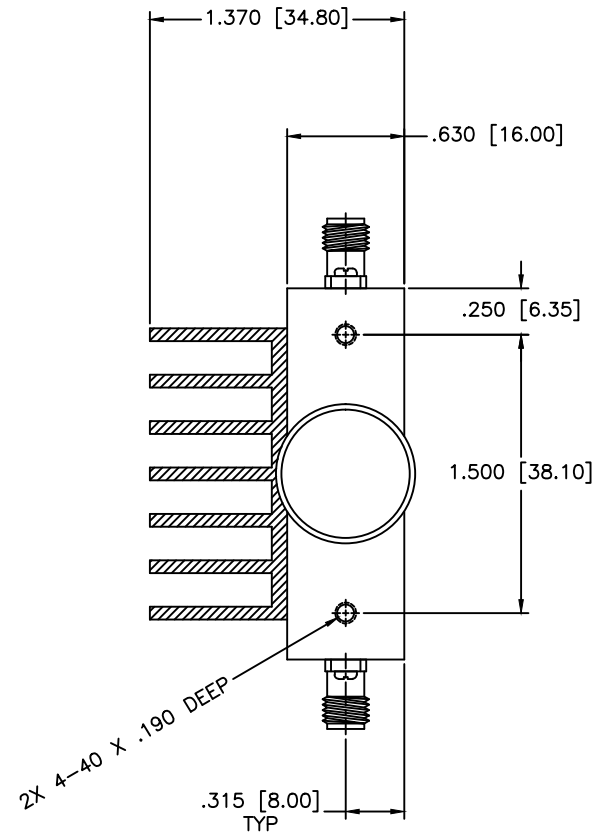


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

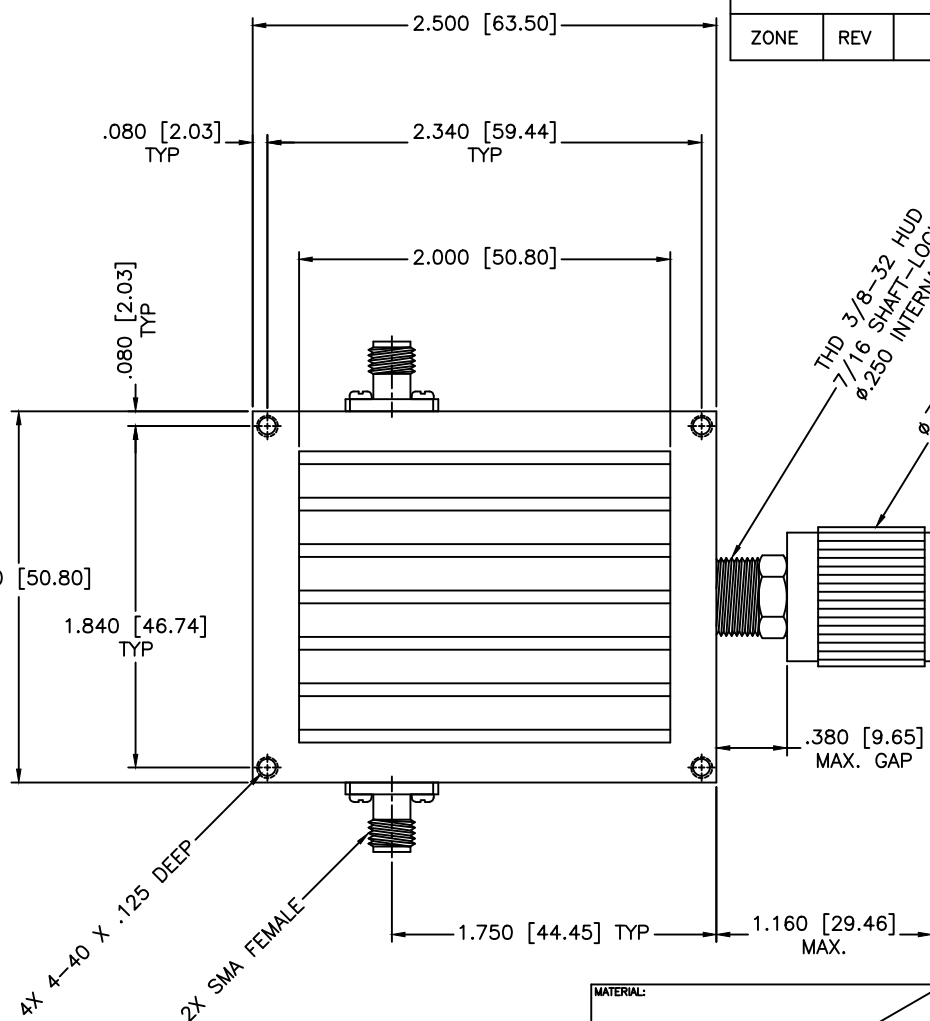

SPECIFICATION

Frequency Range: 4-8 GHz
Attenuation: 10dB
Insertion Loss: 0.5 Max.
VSWR: 1.50:1 Max.
RF Power: 30W Average, 5kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A					
				SHEET:		N/A					
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.015 ANGLE: ±1/2° THIRD ANGLE PROJECTION 		DRAWING TITLE:				CONTINUOUSLY VARIABLE ATTENUATOR, HIGH POWER			
				PART NO.				HA30-6-10			
				CAGE CODE:		SIZE:		REV:		DWG NO.	
				0D2L5		A		N/A			
DRAWN:		DATE:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)				85486			
Paiboon Luekhamhan		02-10-2011									
APPROVED:		DATE:		DO NOT SCALE THE DRAWING							
T. Nguyen		02-10-2011									