

Low PIM 7/16 DIN Male to 7/16 DIN Male Cable 1/2" Superflexible Coax and RoHS Compliant

Fairview's corrugated cable assemblies are ideal for applications where durability and high power are needed. These high quality 50 ohm cable assemblies are constructed with a solid copper clad aluminum inner conductor, a foam dielectric, corrugated copper tube outer conductor, and a tough polyethylene jacket. The solid inner and outer conductors are design to help minimize Intermodulation Distortion (IMD) in communications applications. Injected molded boots on the connectors add durability and strain relief. Our carefully selected assemblies provide the highest quality on the market with PIM ratings of -160 dBc and 1.11 VSWR's. Available in 1/2" Flexible and 1/2" Superflexible cable types in 7/16 DIN and N Type connector configurations.

Electrical Specifications

Frequency Range	DC to 2.7 GHz
Impedance	50 Ohms
Max VSWR	1.11:1
Max Return Loss	26 dB
Velocity of Propagation	83 %
RF Shielding	120 dB
Peak Power	16 KWatts
Passive Intermodulation	-160 dBc

Performance by Frequency

Description	F1	F2	F3	F4	F5
Frequency	900 MHz	1.8 GHz	2.2 GHz	2.7 GHz	
VSWR	1.07:1	1.09:1	1.09:1	1.11:1	
Return Loss (dB)	30	28	28	26	
Insertion Loss (dB/ft)	0.032	0.047	0.053	0.06	
(dB/m)	0.1	0.15	0.17	0.2	

Mechanical Specifications

Temperature

Temperature Operating Range -40 to +80 deg C

Size

Diameter 1.41 in [35.81 mm]

Cable Color Black

One Time Minimum Bend Radius 0.6 in [15.24 mm]

Repeated Minimum Bend Radius 1.18 in [29.97 mm]



Configuration:

- 7/16 DIN Male
- 7/16 DIN Male
- 1/2" Superflexible

Features:

- 1/2" Flexible and 1/2" Superflexible cable options
- 100% RF and PIM tested
- Low Insertion loss
- Low VSWR up to 2.7 GHz
- -160 dBc PIM rating
- Velocity of Propagation of 88%

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Cable

Description	Cable
Cable Type	1/2" Superflexible
Inner Conductor Type	Solid
Cable Inner Conductor	Copper Clad Aluminum
No of Shields	1
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter	0.535 in [13.59 mm]

Connectors

Description	Connector 1	Connector 2
Type	7/16 DIN Male	7/16 DIN Male
Configuration	Straight	Straight
Inner Conductor Material & Plating	Brass, Silver	Brass, Silver
Outer Conductor Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal
Hex Size	32 mm	32 mm
Torque	18.417 ft-lbs [24.97 Nm]	18.417 ft-lbs [24.97 Nm]
Body Material & Plating	Brass, Tri-Metal	Brass, Tri-Metal
Dielectric Type	PTFE	PTFE

Compliance Certifications (visit www.FairviewMicrowave.com for current document)


RoHS Compliant

Yes

Notes:

- Values at +25 °C, sea level

Typical Performance Data

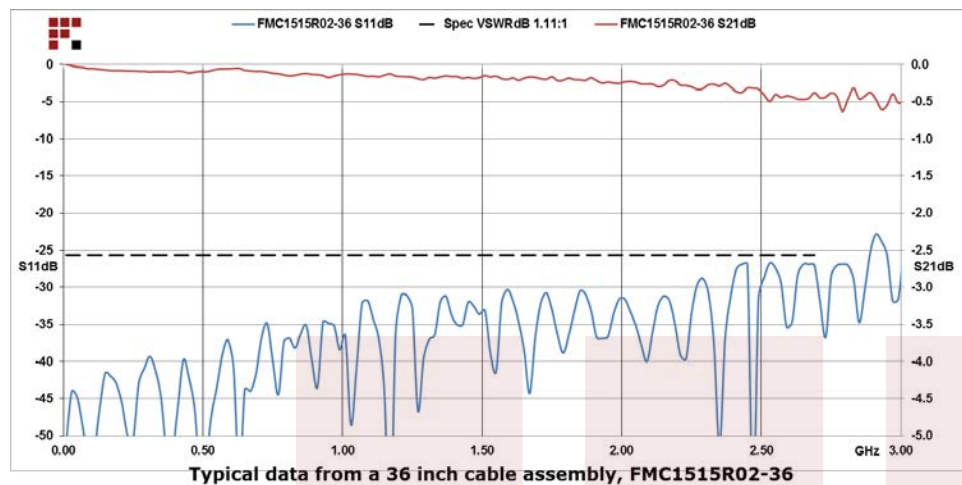


Low PIM 7/16 DIN Male to 7/16 DIN Male Cable 1/2" Superflexible Coax and RoHS Compliant from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [Low PIM 7/16 DIN Male to 7/16 DIN Male Cable 1/2" Superflexible Coax and RoHS Compliant FMC1515R02-XX](#)

URL: <http://www.fairviewmicrowave.com/7-16-male-7-16-male-cable-1-2-superflexible-coax-fmc1515r02-xx-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

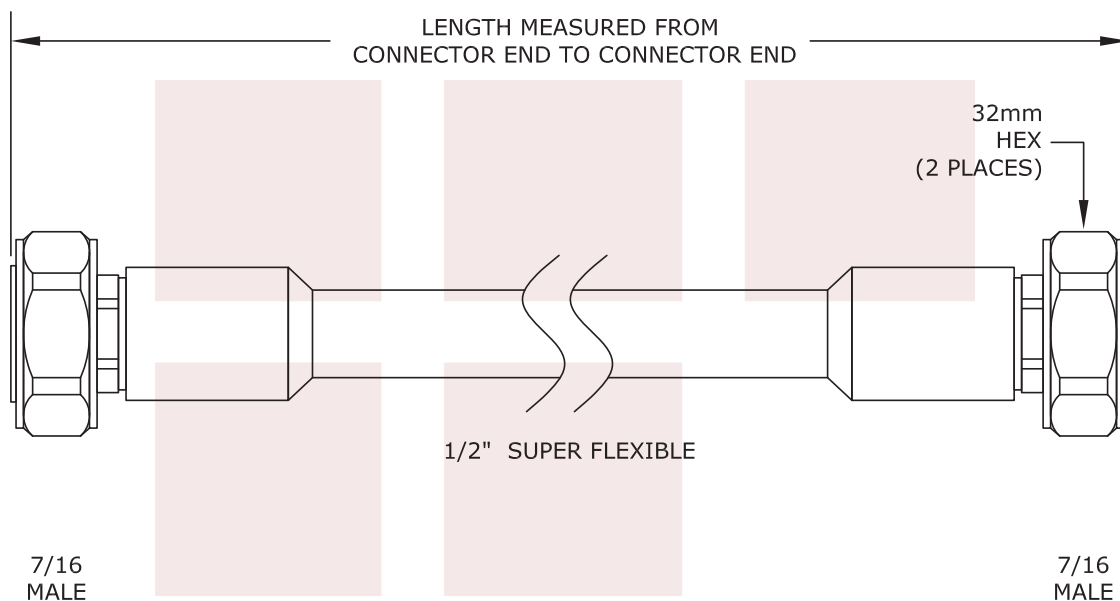

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Low PIM 7/16 DIN Male to 7/16 DIN Male Cable 1/2" Superflexible Coax and RoHS Compliant	DWG NO		CAGE CODE		
	FMC1515R02		3FKR5		
	CAD FILE	120314	SHEET	SCALE	N/A
				SIZE	A
					2233