



# RF-LAMBDA

LEADER OF BROADBAND SOLUTIONS

RLNA01M04GD

## Ultra Wide Band Low Noise Amplifier 0.1GHz~4GHz



### Feature

- Gain: 33 dB
- Noise Figure: 2.5dB
- P1dB Output Power: +32 dBm full band
- Supply Voltage: +12V @ 250mA
- 50 Ohm Matched Input / Output
- Size: 3.54" x 5.12" x 1.1"

### Typical Applications

- Wireless Infrastructure
- RF Microwave & VSAT
- Military & Aerospace
- Test Instrument
- Fiber Optics

Electrical Specifications, TA = +25 ° C, With Vcc = +12V, 50 Ohm System

| Parameter                                  | Min.                                                  | Typ. | Max. | Min. | Typ. | Max. | Units  |
|--------------------------------------------|-------------------------------------------------------|------|------|------|------|------|--------|
| Frequency Range                            | 0.1                                                   |      | 1.5  | 1.6  |      | 4    | GHz    |
| Gain                                       | 32                                                    | 33   |      | 32   | 33   |      | dB     |
| Gain Flatness                              |                                                       | ±1   |      |      | ±1   |      | dB     |
| Gain Variation Over Temperature(-45 ~ +85) |                                                       | ±1.5 |      |      | ±1.5 |      | dB     |
| Noise Figure                               |                                                       | 2.5  | 3.5  |      | 3.5  | 4.5  | dB     |
| Input Return Loss                          |                                                       | 10   |      |      | 10   |      | dB     |
| Output Return Loss                         |                                                       | -    |      |      | -    |      | dB     |
| Output Power for 1 dB Compression (P1dB)   | 34.5                                                  | 35   |      | 32   | 33   |      | dBm    |
| Saturated Output Power (Psat)              |                                                       | /    |      | /    |      |      | dBm    |
| Output Third Order Intercept (IP3)         |                                                       | 45   |      |      | 45   |      | dBm    |
| Supply Current (Idd) (Vcc=+12V)            |                                                       | 250  | 1000 |      | 250  | 1000 | mA     |
| Isolation S12                              | 50                                                    | 65   |      | 60   | 65   |      | dB     |
| Input Max Power(no damage)                 |                                                       |      | +5   |      |      | +5   | dBm    |
| Weight                                     | 7.05                                                  |      |      |      |      |      | ounces |
| Impedance                                  | 50                                                    |      |      |      |      |      | Ohms   |
| Input /Output Connector                    | SMA-Female                                            |      |      |      |      |      |        |
| Finishing                                  | Standard: Gold 40 micron; Nickel 220 micron thickness |      |      |      |      |      |        |
|                                            | Option: Gold 80 micron; Nickel 180 micron thickness   |      |      |      |      |      |        |
| Material                                   | Aluminum/copper                                       |      |      |      |      |      |        |
| Package Sealing                            | Epoxy Sealing (Standard)                              |      |      |      |      |      |        |
|                                            | Hermetically Seal (Option with extra charge)          |      |      |      |      |      |        |

Ultra Wide Band Low Noise Amplifier 0.1GHz~4GHz



# RF-LAMBDA

LEADER OF BROADBAND SOLUTIONS

RLNA01M04GD

## Absolute Maximum Ratings

|                                  |                |
|----------------------------------|----------------|
| Operating Voltage                | +12V           |
| RF Input Power (RFIN)(Vcc= +12V) | +5dB m         |
| Storage Temperature              | -50 to +125 °C |
| Operating Temperature            | -45 to +85 °C  |

## Biasing Up Procedure


|                     |                          |
|---------------------|--------------------------|
| Step 1              | Connect Ground Pin       |
| Step 2              | Connect input and output |
| Step 3              | Connect +12V biasing     |
| Power OFF Procedure |                          |
| Step 1              | Turn off +12V biasing    |
| Step 2              | Remove RF connection     |
| Step 3              | Remove Ground.           |

## Environment specifications


|                              |                                                                                                                                   |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Operational Temperature (C°) | -45 ~ +85                                                                                                                         |
| Storage Temperature (C°)     | -50 ~ +125                                                                                                                        |
| Altitude                     | 30,000 ft. (Epoxy Seal Controlled environment)<br>60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) ( Optional ) |
| Vibration                    | 25g rms (15 degree 2KHz) endurance, 1 hour per axis                                                                               |
| Humidity                     | 100% RH at 35c, 95%RH at 40°c                                                                                                     |
| Shock                        | 20G for 11msc half sin wave,3 axis both directions                                                                                |

## Typical performance plots


### Gain

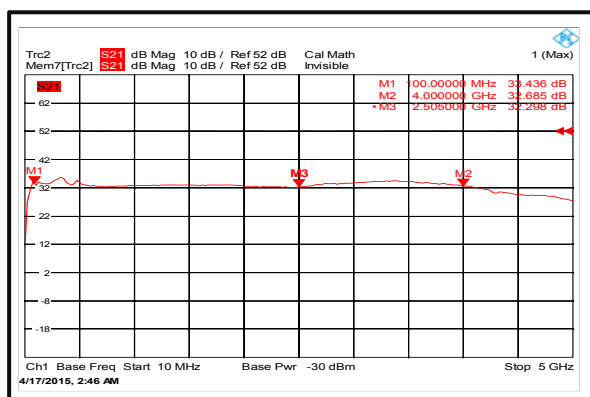


### Input VSWR

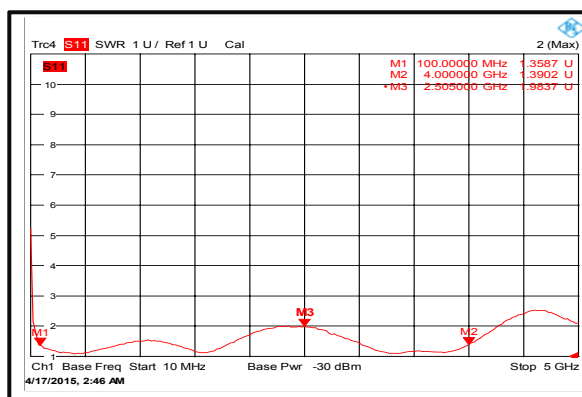

### Output VSWR

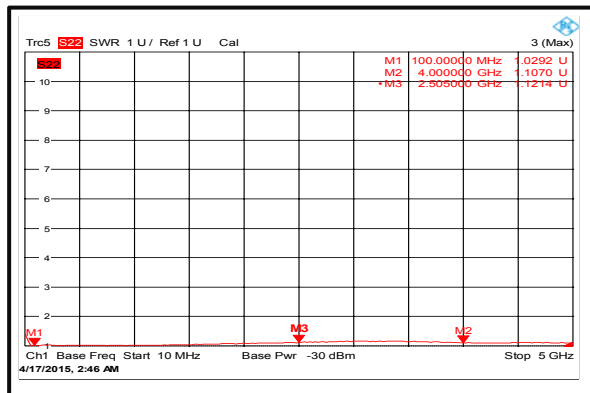

### Isolation

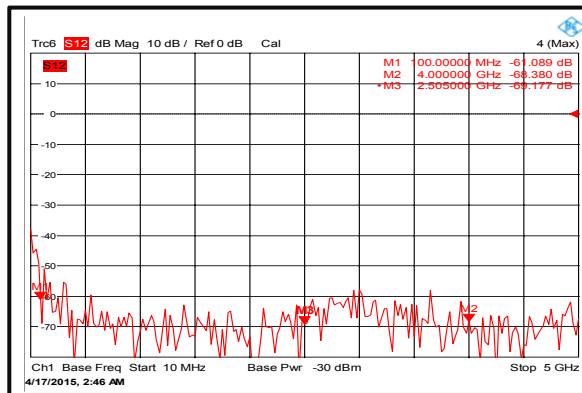

Ultra Wide Band Low Noise Amplifier 0.1GHz~4GHz




# RF-LAMBDA


LEADER OF BROADBAND SOLUTIONS

RLNA01M04GD


## Cain vs. output power

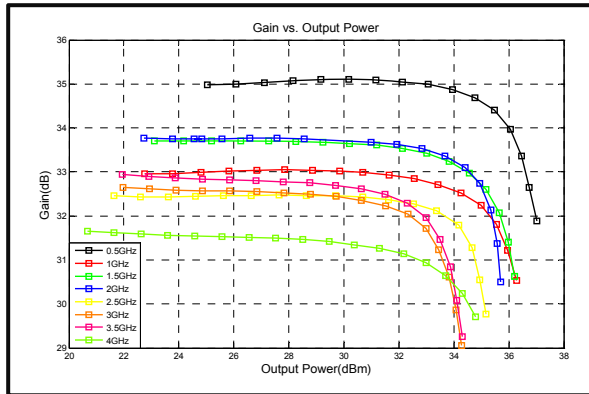


## P1dB vs. Frequency

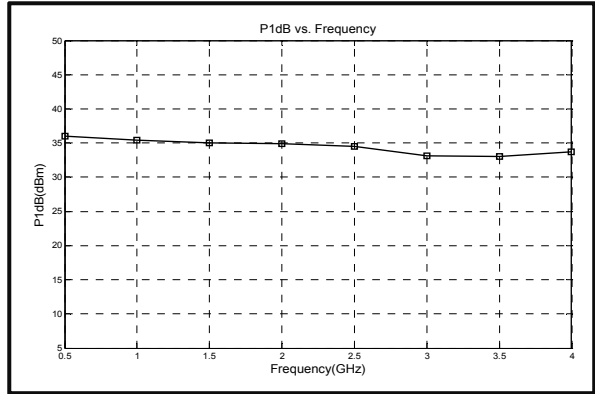


## Output Third Order Intercept (IP3)

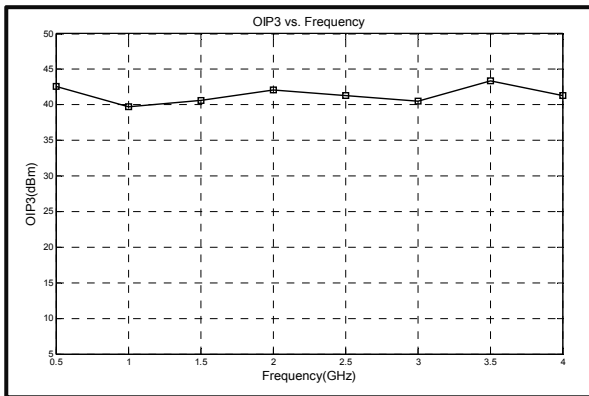


## Noise Figure

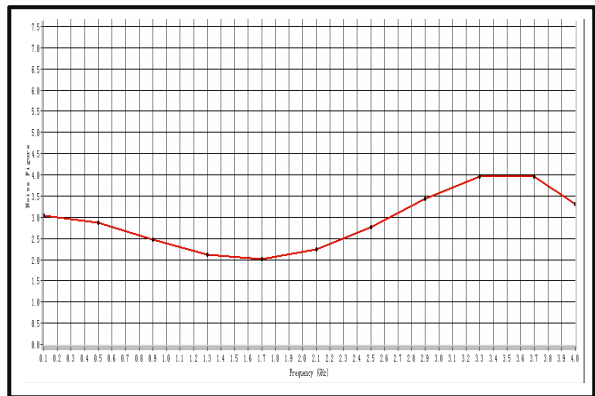


## 2nd Harmonic Wave output Power

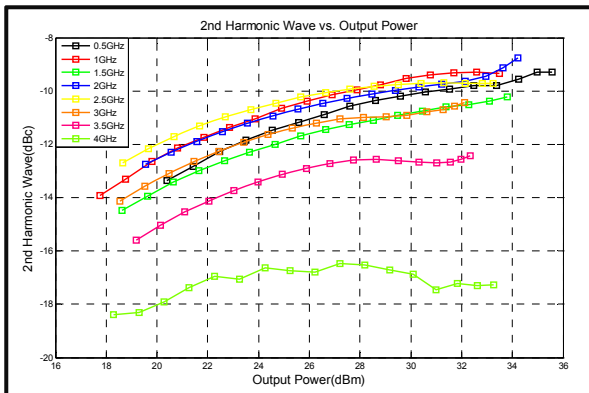

## 3rd Harmonic Wave output Power

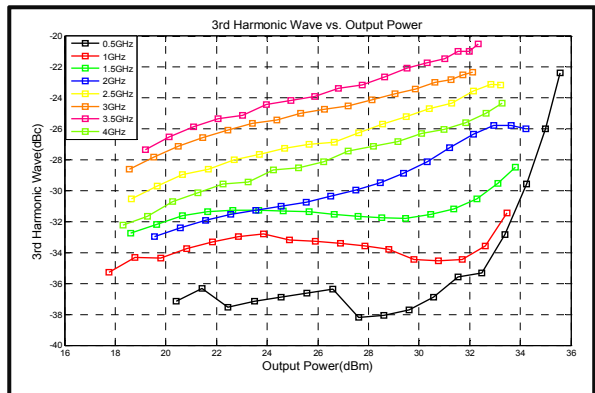

## 4th Harmonic Wave output Power

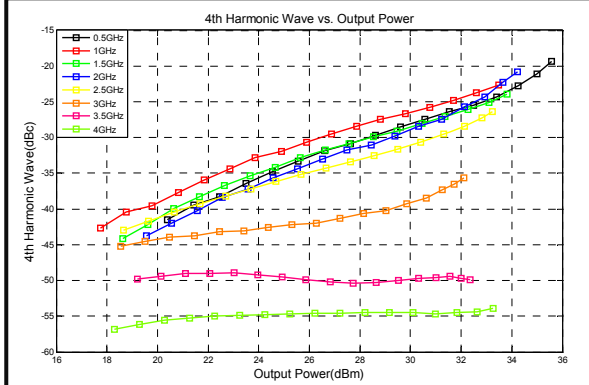

Ultra Wide Band Low Noise Amplifier 0.1GHz~4GHz



# RF-LAMBDA


LEADER OF BROADBAND SOLUTIONS

RLNA01M04GD

## Outline Drawing:

All Dimensions in mm (inches)

Heat Sink required during operation

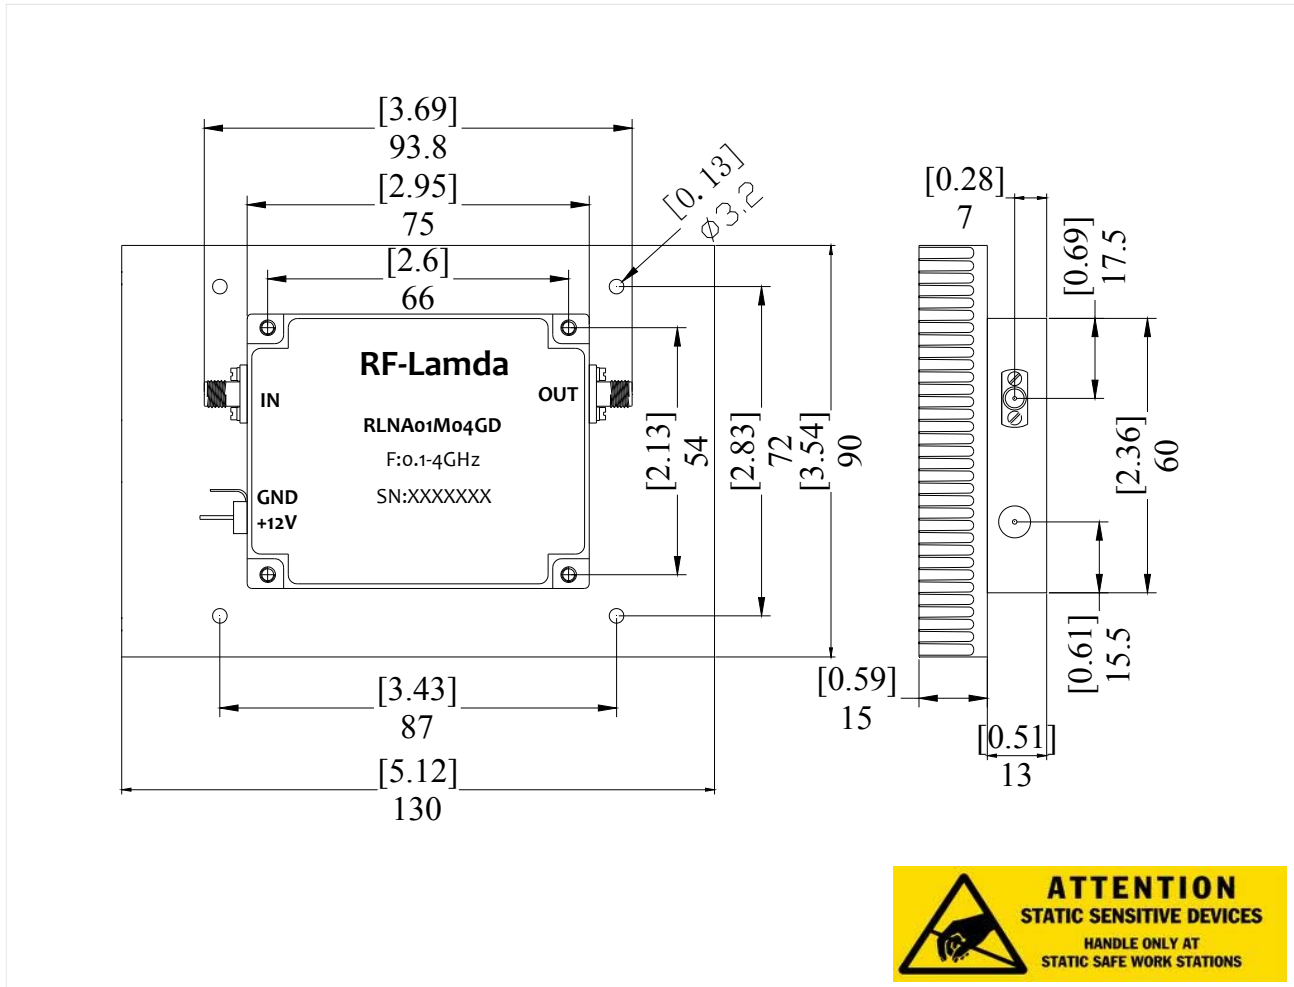

## Ordering Information

| Part No     | ECCN  | Description            |
|-------------|-------|------------------------|
| RLNA01M04GD | EAR99 | 0.1-4GHz LNA Amplifier |

## Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.