




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

剥线尺寸
stripping dimension

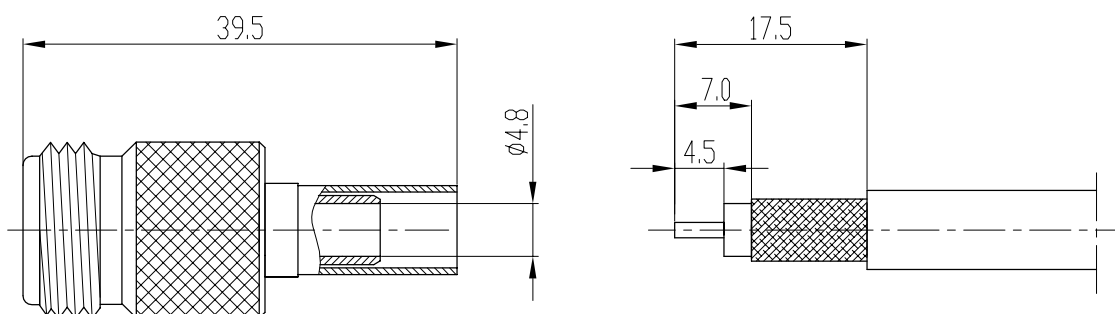

产品型号 type	电缆型号 cable type
N-K6YA	SYV-50-5-1

Electrical Characteristics:

- 1.Characteristic Impedance: 50Ω
- 2.Frequency range: DC~4Ghz
- 3.Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.2\text{ m}\Omega$
4. Insulation resistance: $\geq 5000\text{ M}\Omega$
5. Insulator withstanding: 1500V
6. VSWR: ≤ 1.5
7. Durability: 500cycles

Application: MIL-C-39012/1E

Material&Finishing

- 1.Center contact :
Female: phosphor bronze, gold plated
- 2.Bodies and other metal parts:
brass, nickel plated
- 3.Crimp ferrule: copper, nickel plated
4. Insulators: PTFE

主要性能指标:

- 1.特性阻抗: 50Ω
- 2.频率范围: DC~4Ghz
- 3.接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.2\text{ m}\Omega$
- 4.绝缘电阻: $\geq 5000\text{ M}\Omega$
- 5.介质耐压: 1500V
- 6.电压驻波比: ≤ 1.5
- 7.插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 1.中心接触件:
插孔: 锡磷青铜, 镀金
- 2.壳体和其它金属零件:
黄铜, 镀镍
- 3.线夹: 黄铜, 镀镍
- 4.绝缘子: 聚四氟乙烯

		SCALE
		1.5:1
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

N-K6YA
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.