




Features

- Ultra-low Phase Noise/Low Current
- Frequency: 374MHz
- Resonator: Aircoil
- PCB: Rogers
- Package Size: 12.7mm x 12.7mm x 5.59mm (0.5in x 0.5in x 0.22in)

Applications

- IF Conversion Applications
- Low Phase Noise Agile Clock Applications
- Low Phase Noise Applications

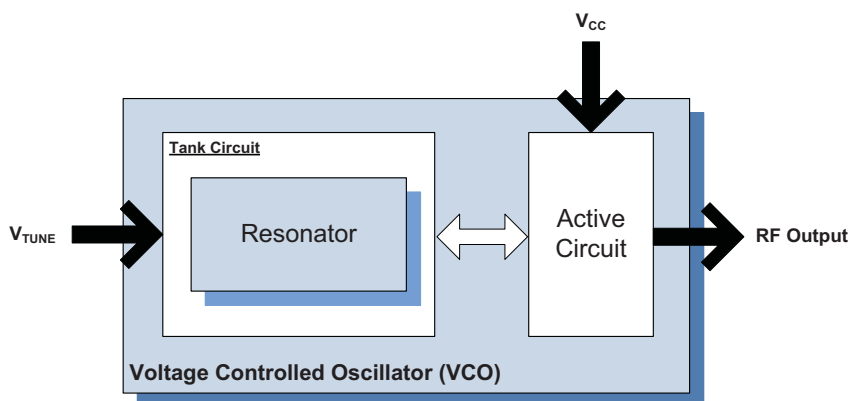

Functional Block Diagram

Product Description

This series of VCO modules offers an ultra-low noise VCO which includes an internal buffer amplifier for high performance IF conversion.

Ordering Information

UMJ-498-D14-G Contact us at 1-480-756-6070

Optimum Technology Matching® Applied

- | | | | |
|--------------------------------------|--------------------------------------|--|------------------------------------|
| ☐ GaAs HBT | ☐ SiGe BiCMOS | ☐ GaAs pHEMT | ☐ GaN HEMT |
| ☐ GaAs MESFET | ☐ Si BiCMOS | ☐ Si CMOS | ☐ BiFET HBT |
| ☐ InGaP HBT | ☐ SiGe HBT | ☒ Si BJT | ☐ LDMOS |

Absolute Maximum Ratings

Parameter	Rating	Unit
Operating Ambient Temperature[1]	-40 to +85	°C
Storage Temperature	-55 to +125	°C

[1] Frequency drift: 2.0MHz typical, 4.0MHz maximum (either extreme)



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.



RoHS (Restriction of Hazardous Substances): Compliant per EU Directive 2002/95/EC.

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Overall					
Frequency Range		374		MHz	
Tuning Voltage	0.5		4.5	V _{DC}	
Tuning Sensitivity		5		MHz/V	
Output Power	6	8	10	dBm	
	5			dBm	At V _T =0
Output Phase Noise		-93	-90	dBc/Hz	1 kHz
		-118	-115	dBc/Hz	10 kHz
		-138	-135	dBc/Hz	100 kHz
		-158	-153	dBc/Hz	1000 kHz
		-164	-155	dBc/Hz	10000 kHz
Second Harmonic		-25	-20	dBc	
Frequency Pulling		1	3	MHz p-p	At 12dBr, all phases
Tuning Port Capacitance		330		pF	
Modulation Bandwidth		100		kHz	3 dB BW
Frequency Pushing		1	1.5	MHz/V	
Power Supply					
Operating Voltage		5		V	
Supply Current		15		mA	

12.7mm x 12.7mm x 5.59mm (0.5in x 0.5in x 0.22in)

