




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

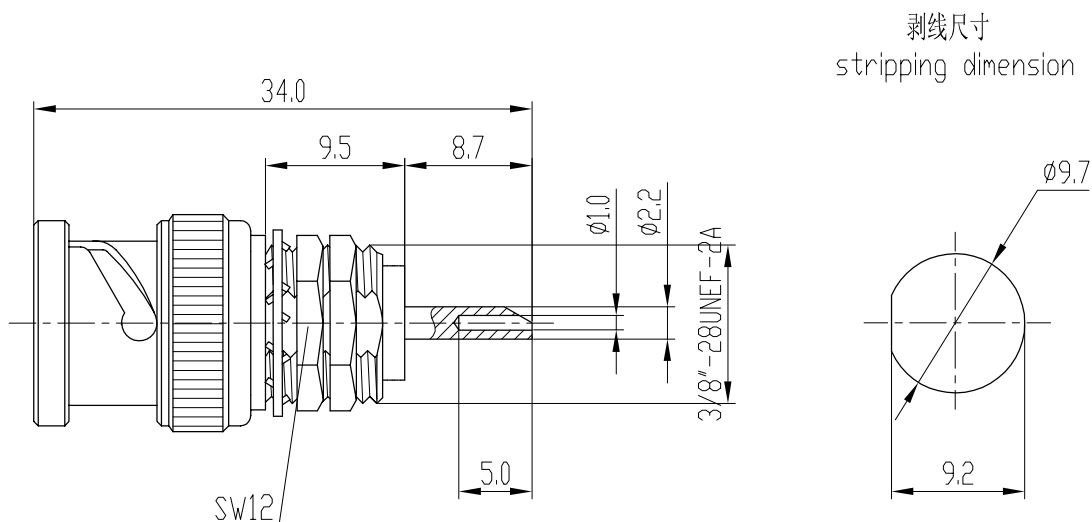

Electrical Characteristics:

- 1.Characteristic Impedance: 50 Ω
- 2.Frequency range: DC~2Ghz
- 3.Contact resistance
Center conductor: $\leq 1.5 \text{ m}\Omega$
Out conductor: $\leq 0.2 \text{ m}\Omega$
4. Insulation resistance: $\geq 5000 \text{ M}\Omega$
5. Insulator withstanding: 1500V
6. Durability: 500cycles

Application: MIL-C-39012/16E

Material&Finishing

- 1.Center contact :
Male: brass, gold plated
2. Bodies and other metal parts:
brass, nickel plated
3. Insulators: PTFE


主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~2Ghz
3. 接触电阻:
中心导体: $\leq 1.5 \text{ m}\Omega$
外导体: $\leq 0.2 \text{ m}\Omega$
4. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
5. 介质耐压: 1500V
6. 插拔次数: 500次

执行标准: MIL-C-39012/16E

材料和镀层

1. 中心接触件:
插针: 黄铜, 镀金
2. 壳体和其它金属零件: 黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2:1		
	NAME	DATE	BNC-JY1 RF COAXIAL CONNECTOR	
DRAWN			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
CHECKED				
APPROVED				