





	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	07/15/99
			Checked	Date
			M.H.	07/15/99
		Drawn	Date	
		K.R.E.	07/14/99	
NOTES (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
1. Per QQ-B-626	6. Per ZZ-R-765	7. Per WW-T-799	10. Per QQ-P-35	
2. Per QQ-S-764	8. Gold pl. 50 min. over nickel pl. 50 min. over copper strike		11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
3. Per QQ-C-530				
4. Per QQ-B-750				




MOUNTING HOLE

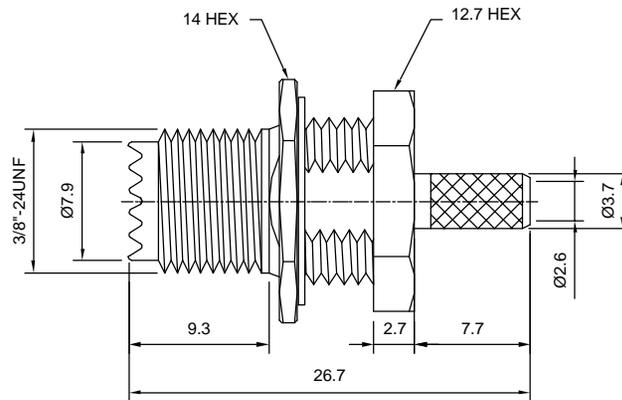

SLEEVE



RECOMMENDED
CABLE STRIPPING DIM'S



ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: Female	Brass, Note 1	Gold, Note 11
Insulation and Sleeve	Delrin	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body



Lighthouse Technologies, Inc.
4907 Morena Boulevard, #1411
San Diego, California 92117
Part Number:
LTI-MSF13ND-316

Description
Mini-UHF Bulkhead Crimp Jack for RG-316

Scale 2:1	Drawing No. M/MSF13-316	File Name MSF13R-316
--------------	----------------------------	-------------------------