

49 to 270MHz – Drop in Circulator

Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDC6466A49T51	49 ~ 51	1.2	20	1.25	60	60	TAB	0 ~ +65
UIYDC6466A50T75	50 ~ 75	1.8	20	1.25	60	60	TAB	0 ~ +65
UIYDC6466A504T509	50.4 ~ 50.9	1.1	20	1.25	60	60	TAB	25±5
		1.3	17	1.35				0 ~ +60
UIYDC6466A55T60	55 ~ 60	1.2	20	1.25	60	60	TAB	0 ~ +60
UIYDC6466A56T86	56 ~ 86	1.5	16	1.4	60	60	TAB	+10 ~ +60
UIYDC6466A75T95	75 ~ 95	1.2	16	1.4	60	60	TAB	+10 ~ +60
UIYDC6466A95T135	95 ~ 135	1.2	18	1.3	60	60	TAB	+10 ~ +60
UIYDC6466A135T200	135 ~ 200	1.2	18	1.3	60	60	TAB	+10 ~ +60
UIYDC6466A200T270	200 ~ 270	1.0	18	1.3	60	60	TAB	+10 ~ +60

- 2 List are specify frequency range and other ranges available.
 2 Please enter below information when inquiry and mark * is must.
 * 1. The specific frequency range
 * 2. Power handling (Forward, Reverse, Peak, etc.)
 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

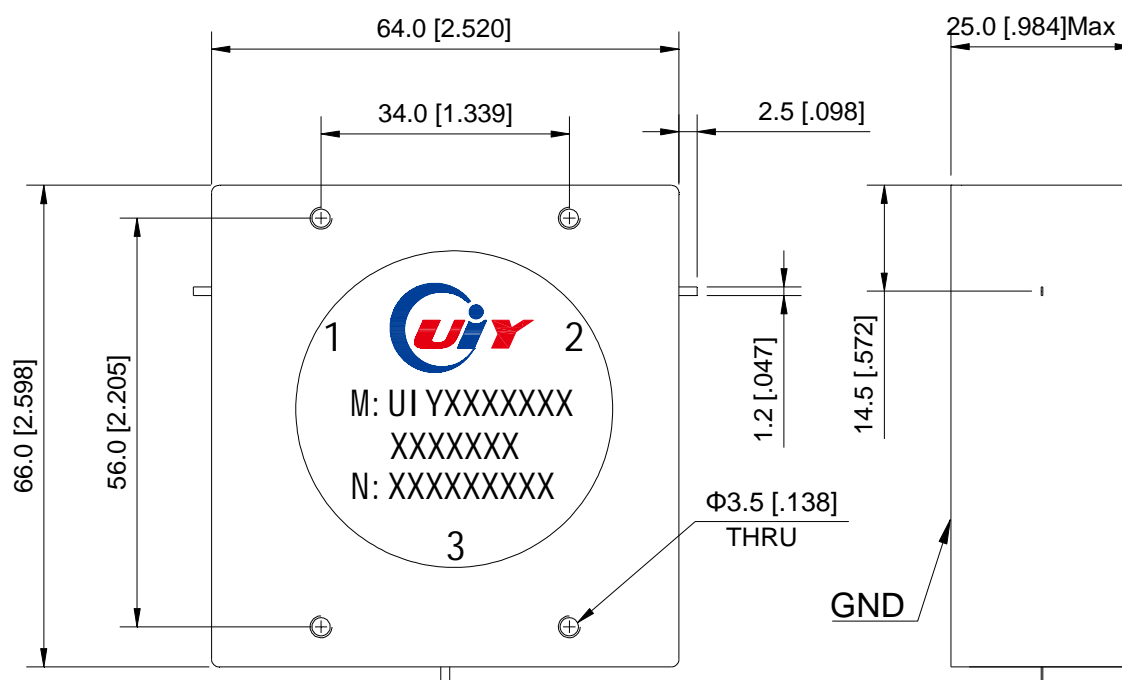

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com