


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

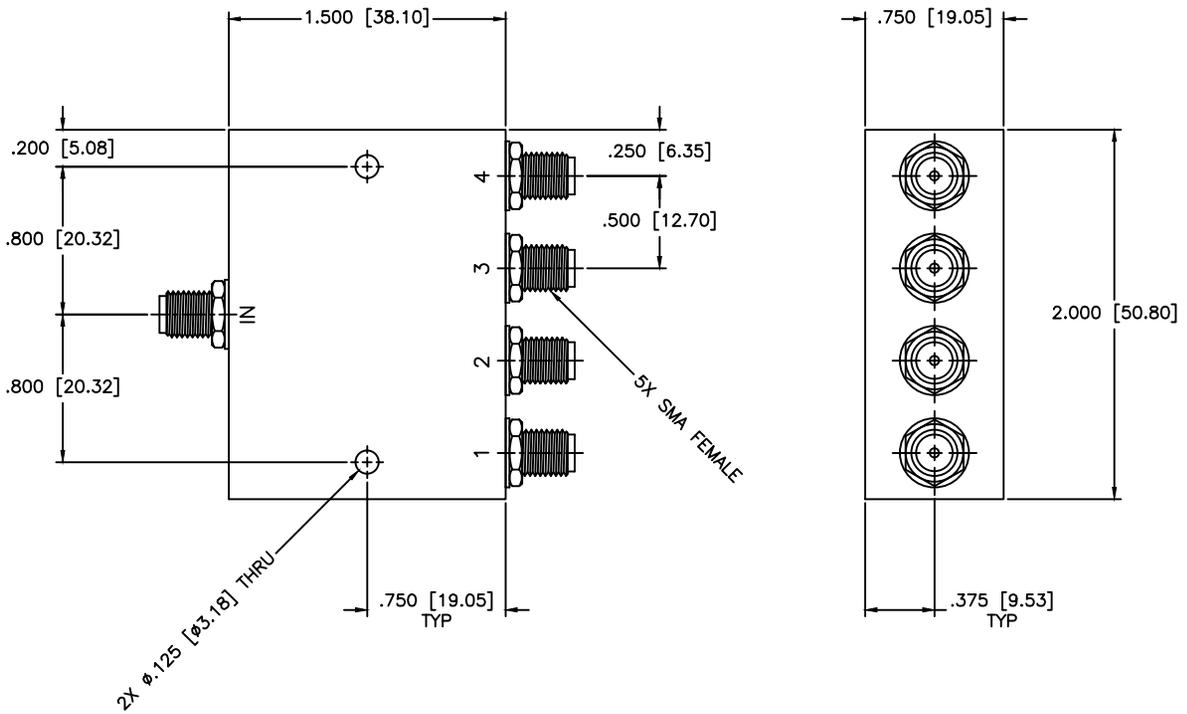

SPECIFICATIONS

Frequency Range: 10–500 MHz
 Isolation: 25dB Min.
 Insertion Loss: 1.0dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.
 VSWR: 1.30:1 Max.
 Power: 1 Watt Max.

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		4-WAY POWER DIVIDER		
PART NO.:		PL4-24		
DRAWN: Paiboon Luekhamhan	DATE: 07-31-2001	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
APPROVED: T. Nguyen	DATE: 07-31-2001		THIRD ANGLE PROJECTION 	OD2L5