


Uncontrolled Drawing

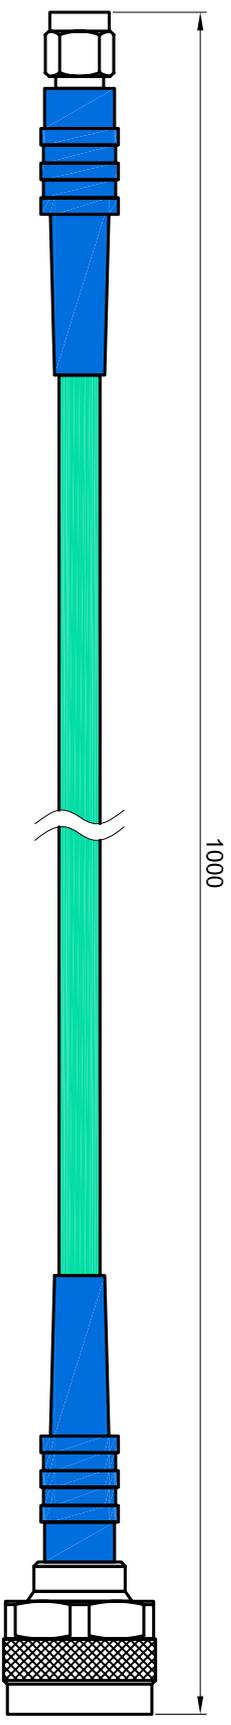

Type SMA male

Type N male

Specification:

1. Model: MC06-01-03-1000
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-6GHz, up to 8GHz
4. Insertion Loss: 0.85dB@DC-1GHz, 1.30dB@1-3GHz, 2.00dB@3-6GHz, 2.20dB@6-8GHz
5. VSWR: 1.15@DC-1GHz, 1.20@1-3GHz, 1.25@3-6GHz, 1.30@6-8GHz
6. Length: 1m
7. Connector: SMA male to N male
8. Power CW: 166W@6GHz

参 考 号	修 改	编 号/名称、型号、材料标准号	图 号	505.0311
DESIGNED_ZYY	CHECKED_ZH	APPROVED_	FILENAME	10/2/14
BXT Technologies			Test Cable Assembly	版 次
Tel:0591-83789500			MC06-01-03-1000	EDITION
www.bxt-technologies.cn				SHEET
				1/1

**BXT**  
RF Technologies

1 2 3 4 5 6