


Revisions		Approved	Date
Description/Approval/Date	M.H.	6/20/99	
	Checked	M.H.	6/20/99
	Drawn	K.R.E.	6/20/99

Tolerances
1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

NOTES (plating thickness in microinches):
1. Per QQ-B-626
2. Per QQ-S-764
3. Per QQ-C-530
4. Per QQ-B-750
5. Per MIL-P-19488
6. Per ZZ-R-765
7. Per WW-1-799
8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
9. Nickel pl. 100 min. over copper strike
10. Per QQ-P-35
11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike

Dimensions are in Millimeters

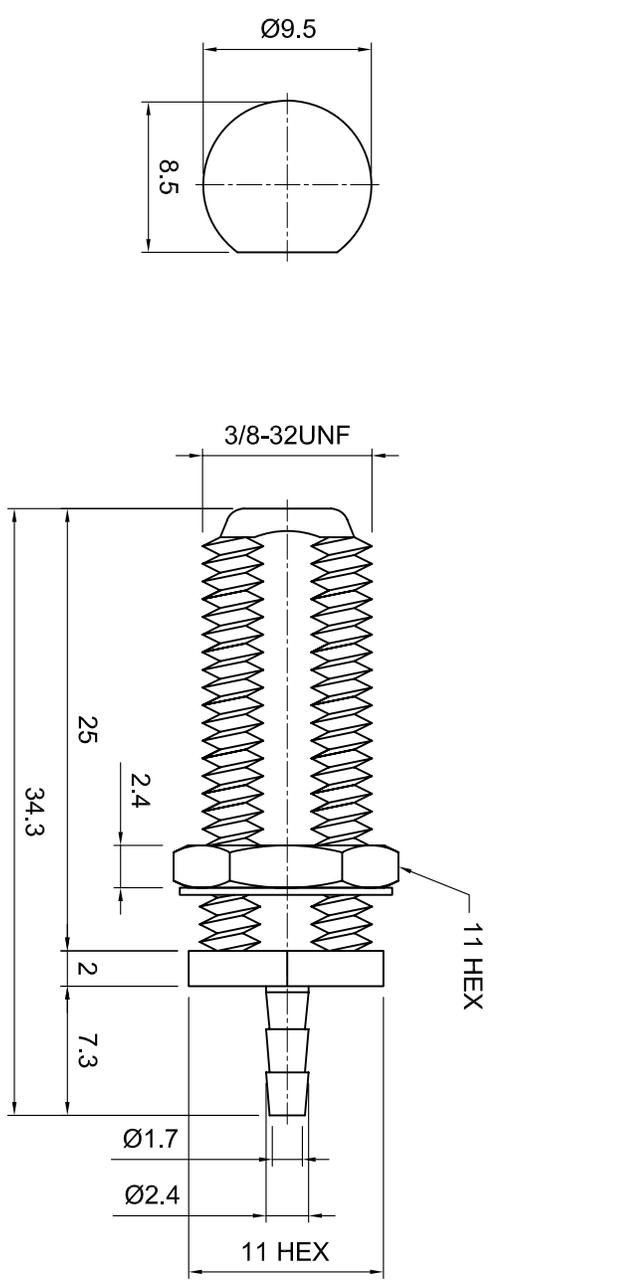

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: Female	Brass, Note 1	Nickel, Note 9
Insulation	Polypropylene	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body

Lighthorse Technologies, Inc.
5640 Keamy Mesa Rd. Ste. N
San Diego, California 92111

Part Number:
LTI-FSF13RNP-179

Description F series Bulkhead Jack for RG-179		
Scale 1:1	Drawing No. FSF13RNP-179	File Name FSF13RNP-179