

SPECIFICATIONS;

IMPEDANCE : 50 Ohms

Frequency Range :DC~18GHz


Working Voltage : 1000 VRMS

Insulation Resistance : 5000M ohms min.


Temperture Range : -55~155°C

VSWR : DC~18 GHz : ≤ 1.20

RF Leakage: -(60-F(GHz))dBm max.

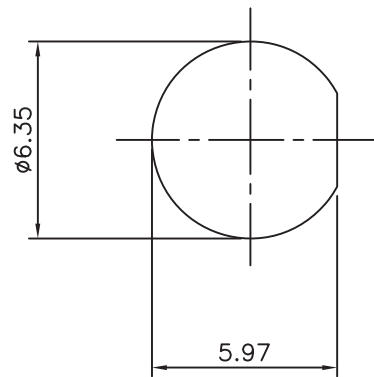

MOUNTING HOLE

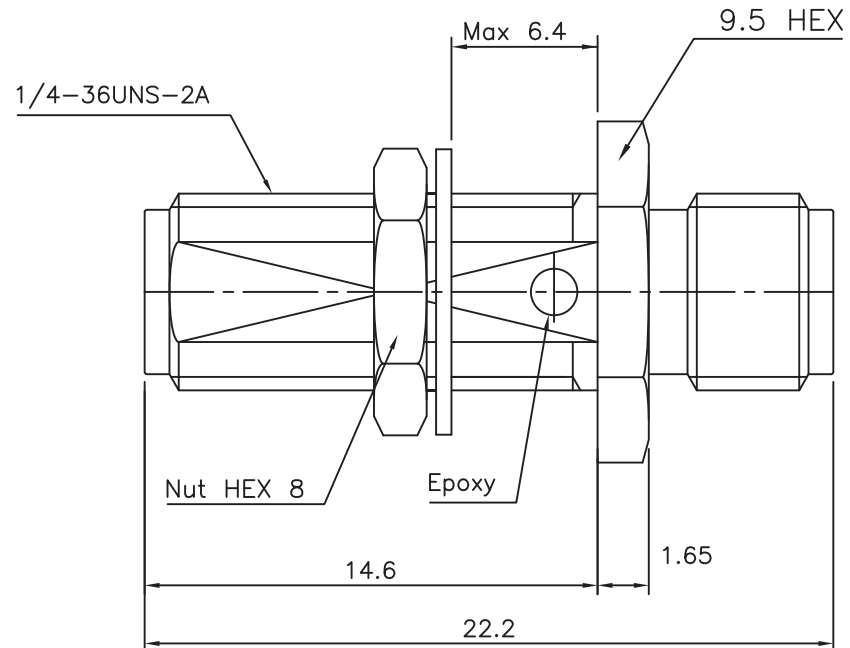

RoHS Compliant

SMA Bulkhead JACK TO JACK
-ADAPTOR

Connector parts	Materials	Finish
Body,Nut,Washer	Stainless steel	Passivated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	1S-804S-5170	NAME	SMA/BJ-J ADAP.		APPROVED
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05	ANGLES ±1°	CHECKED
SCALE	N/S	UNIT	mm		DESIGNED S.J.LEE
DWG NO.	1S-804S-5170	DATE.	27/JUN/2008		

Cross RF
web: www.crossrf.com