



Low PIM 4.1/9.5 Mini DIN Male to N Female Adapter

TECHNICAL DATA SHEET

PE91093

Low PIM 4.1/9.5 Mini DIN Male to N Female Adapter

Configuration

Connector 1	4.1/9.5 Mini DIN Male
Impedance 1	50 Ohms
Connector 2	N Female
Impedance 2	50 Ohms
Adapter Design	Low PIM
Body Style	Straight

Electrical Specifications

Frequency Range, GHz	DC to 6
Maximum VSWR	1.25:1
Maximum Passive Intermodulation (2 x 20 Watts), dBc	-160

Frequency 1

Frequency, GHz	DC to 3
VSWR	1.1:1

Frequency 2

Frequency, GHz	3 to 4
VSWR	1.15:1

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +120
------------------------	-------------

Size

Length, in [mm]	1.9 [48.26]
Width/Dia., in [mm]	0.86 [21.84]

Connector 1

Type	4.1/9.5 Mini DIN Male
Mating Cycles	500
Inner Conductor Material and Plating	Beryllium Copper, Silver
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size, mm	22
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Connector 2

Type	N Female
Mating Cycles	500
Inner Conductor Material and Plating	Beryllium Copper, Silver

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 4.1/9.5 Mini DIN Male to N Female Adapter PE91093](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Low PIM 4.1/9.5 Mini DIN Male to N Female Adapter

TECHNICAL DATA SHEET

PE91093

Outer Conductor Material and Plating
Body Material and Plating
Dielectric Type

Brass, Tri-Metal
Brass, Tri-Metal
PTFE

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Yes

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Low PIM 4.1/9.5 Mini DIN Male to N Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 4.1/9.5 Mini DIN Male to N Female Adapter PE91093](#)

URL: <http://www.pasternack.com/4.1-9.5-mini-din-male-n-female-straight-adapter-pe91093-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE91093 CAD Drawing

Low PIM 4.1/9.5 Mini DIN Male to N Female Adapter

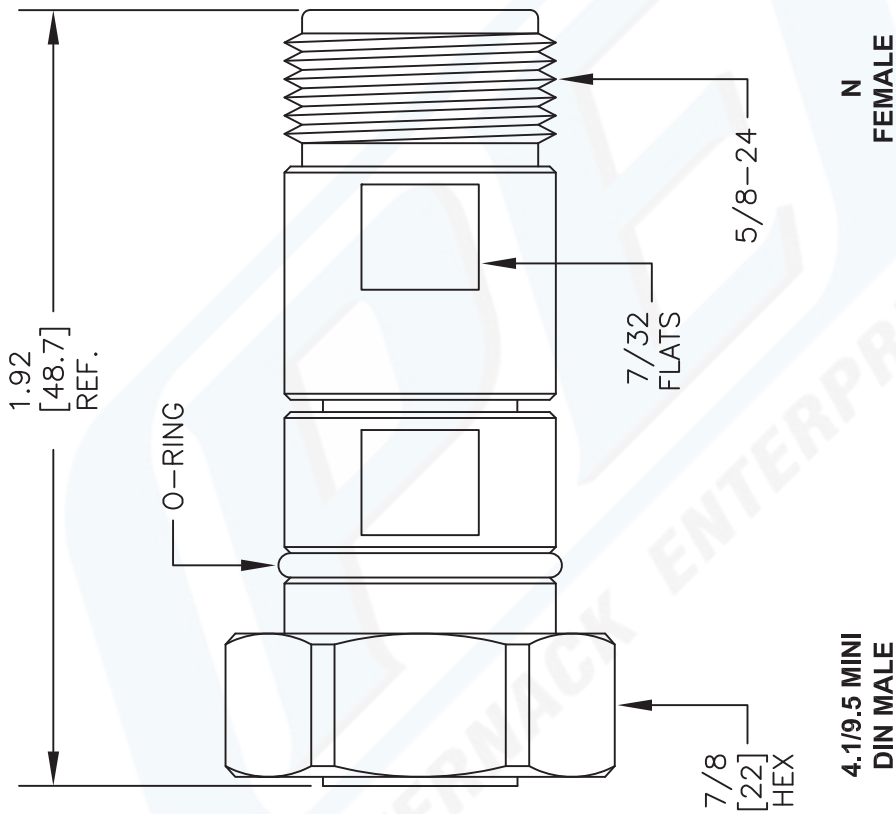

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE91093

FSCM NO. 53919

CAD FILE 010814

SCALE N/A

SIZE A

2233

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com