

D

C

B

A

D

C

B

A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

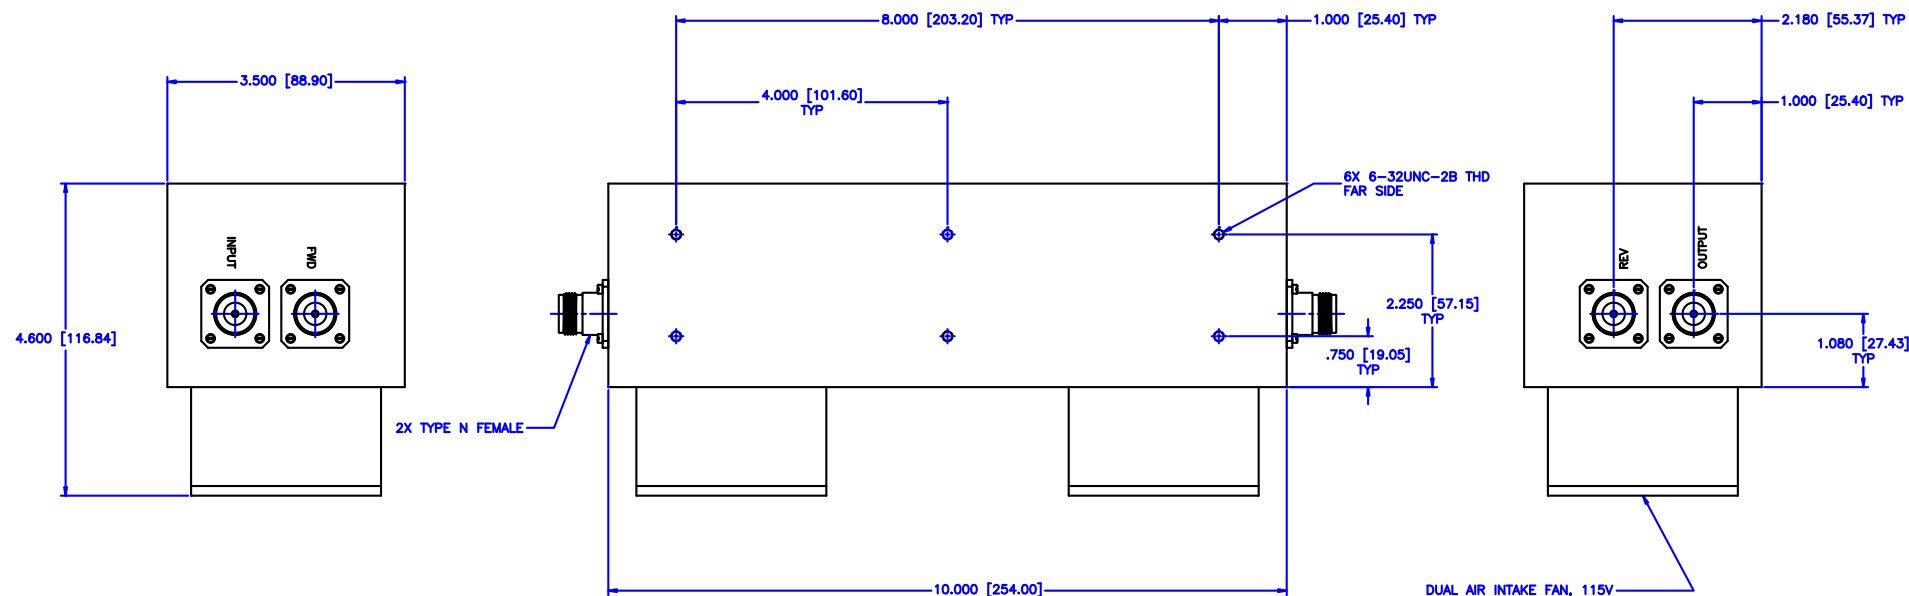

SPECIFICATIONS:

FREQUENCY RANGE: 0.01-250 MHz

FLATNESS: ± 1.0 dB

INSERTION LOSS: 0.15dB Max.

DIRECTIVITY: 20dB Min.

VSWR: 1.15:1 Max.

POWER: 3,500 Watts CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 01-06-2011		PART NO. HDL-3-60	
APPROVED: T. Nguyen		DATE: 01-06-2011		CAGE CODE: OD2L5	
THIRD ANGLE PROJECTION		SIZE: N/A		REV: N/A	
		DO NOT SCALE THE DRAWING		DWG NO. 85209	