
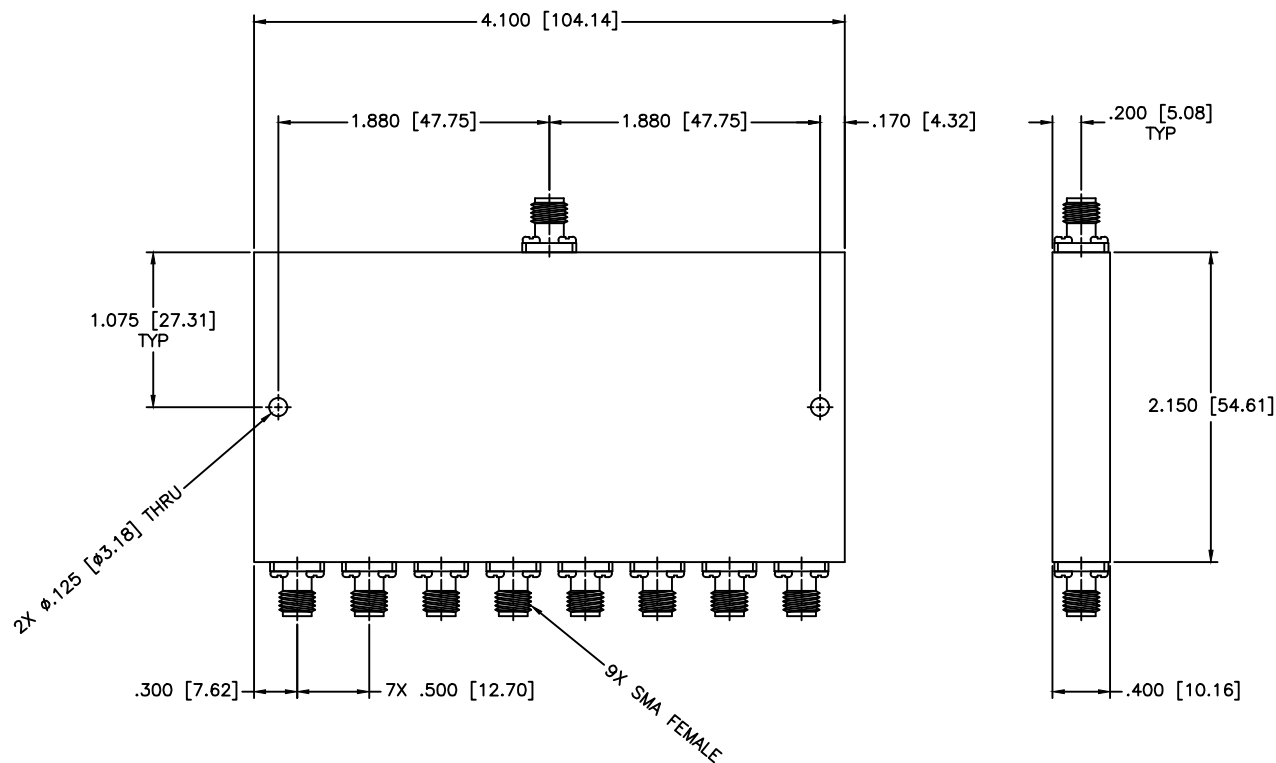


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: 1.2–1.75 GHz
 VSWR: 1.50:1/1.50:1 Max.
 Insertion Loss: 1.0dB Max.
 Isolation: 19dB Min.
 Phase Balance: ± 12 Deg. Max.
 Amplitude Balance: ± 0.5 dB Max.
 Power Rating: 30W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A					
				SHEET:		N/A					
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:							
				8-WAY POWER DIVIDER							
				PART NO.							
				PS8-50							
DRAWN: Paiboon Luekhamhan		DATE: 06-22-1999		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)							
APPROVED: T. Nguyen		DATE: 06-22-1999		CAGE CODE: OD2L5		SIZE: N/A		REV: N/A		DWG. NO. 80997	
				THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING					