


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

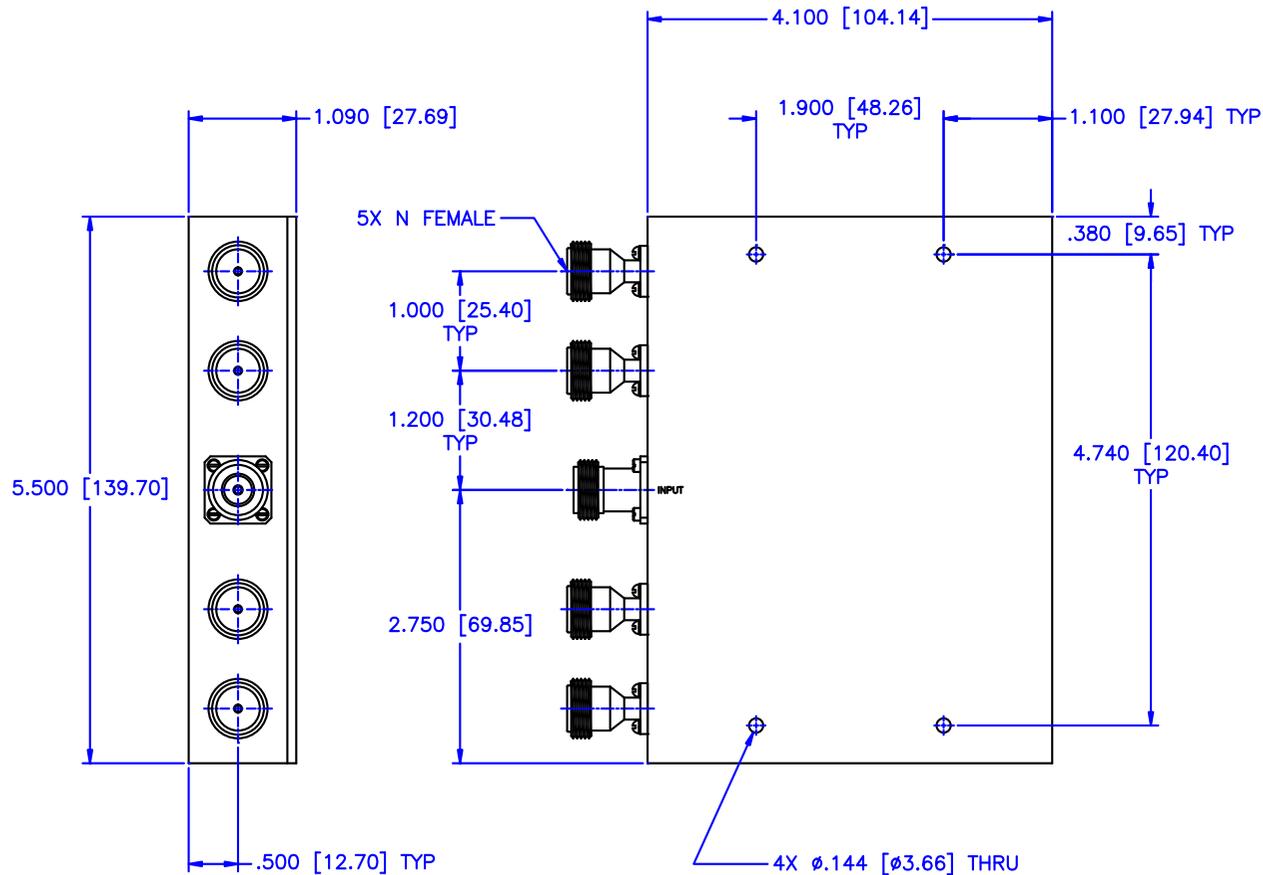

SPECIFICATIONS

- Frequency Range: 1850–2000 MHz
- VSWR: 1.30:1 Max.
- Insertion loss: 0.5dB Max.
- Isolation: 20dB Min.
- Phase Balance: $\pm 6^\circ$ Deg. Max.
- Amplitude Balance: ± 0.5 dB Max.
- Power: 50 Watts CW

DRAWING: Palboon Luethamhan		DATE: 07-25-2011				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8294 FAX: (727) 381-0110 WWW.MCL.COM		SCALE: N/A
APPROVED: T. Nguyen				DATE: 07-25-2011		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN (INCHES) OR (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.005 ANGLES: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE: 4-WAY POWER DIVIDER						PART NO.: PLH4-36/NF		APP. NO.: 85787
CASE CODE: OD2L5				REV: N/A		REV: N/A		DO NOT SCALE THE DRAWING