


剥线尺寸
stripping dimension

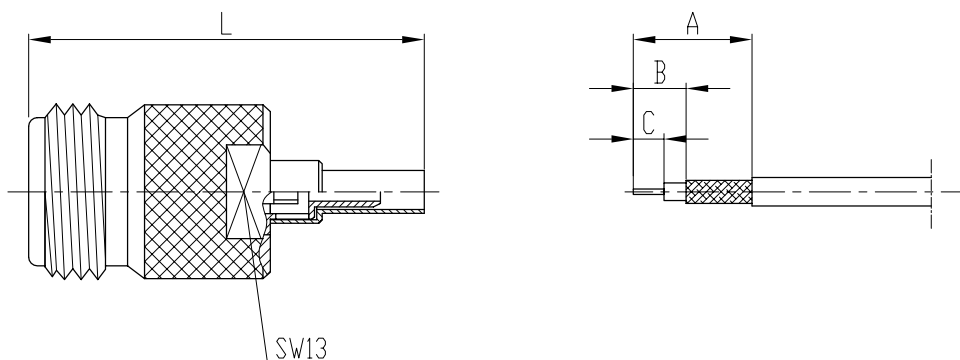

产品型号 type	A	B	C	L	电缆型号 cable type
N-K3Y	10.8	4.8	2.8	36.0	SFT-50-1.5-1、SYV-50-2-1、RG316/U、RG179B/U
N-K6Y	16.0	5.5	3.5	42.0	SYV-50-5-1

Electrical Characteristics:

1. Characteristic Impedance: 50Ω
2. Frequency range: DC~6Ghz
3. Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.2\text{ m}\Omega$
4. Insulation resistance: $\geq 5000\text{ M}\Omega$
5. Insulator withstanding: 1500V
6. VSWR: ≤ 1.5
7. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50Ω
2. 频率范围: DC~6Ghz
3. 接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.2\text{ m}\Omega$
4. 绝缘电阻: $\geq 5000\text{ M}\Omega$
5. 介质耐压: 1500V
6. 电压驻波比: ≤ 1.5
7. 插拔次数: 500次

Application: MIL-C-39012/1E


执行标准: MIL-C-39012/1E

Material&Finishing

1. Center contact :
Female: phosphor bronze, gold plated
2. Bodies: brass, nickel plated
3. Crimp ferrule: copper, nickel plated
4. Insulators: PTFE

材料和镀层

1. 中心接触件:
插孔: 锡磷青铜, 镀金
2. 壳体: 黄铜, 镀镍
3. 线夹: 黄铜, 镀镍
4. 绝缘子: 聚四氟乙烯

	SCALE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES $.X \pm .15$ $\pm 1^\circ$ $.XX \pm .05$ $.XXX \pm$
	1.5:1	
N-K3Y RF COAXIAL CONNECTOR		
NAME	DATE	
DRAWN		
CHECKED		
APPROVED		

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.