

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED


MECHANICAL
 CONTACT: BREAK BEFORE MAKE
 ACTUATOR: LATCHING
 SWITCHING SPEED: 20 mSEC MAX

ELECTRICAL
 ACTUATOR VOLTAGE: 28.0 Vdc (22.0-32.0 Vdc)
 ACTUATOR CURRENT: 0.250 A MAX @ 28.0 Vdc
 POWER HANDLING: 200 WCW @ 1.0 GHz




ENVIRONMENTAL
 OPERATING TEMP: -54°C to +90°C
 SINE VIBRATION: 30 G'S rms
 LIFE : 1,000,000 CYCLES
 RANDOM VIBRATION: 20 G'S rms

SPECIFICATION:

	DC-2.0	2.0-4.0	4.0-8.0	8.0-12.4	12.4-18.0
FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0	4.0-8.0	8.0-12.4	12.4-18.0
VSWR (Max.):	1.20:1	1.25:1	1.30:1	1.40:1	1.50:1
INSERTION LOSS (dB):	0.20	0.25	0.30	0.40	0.50
ISOLATION (dB):	90	80	80	70	60
IMPEDANCE: 50 OHMS					

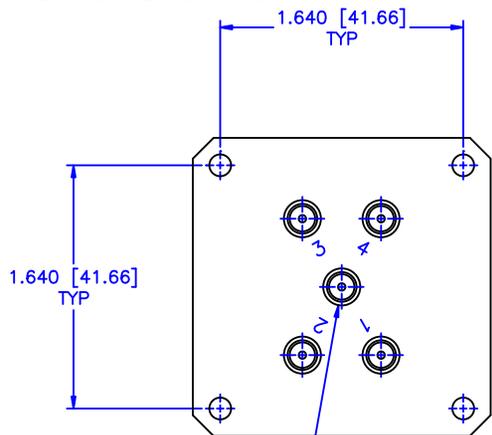

(5) TYPE SMA FEMALE
 (4) EQUALLY SPACED AT 60°
 ON $\phi 1.062$ [$\phi 26.97$] B.C.

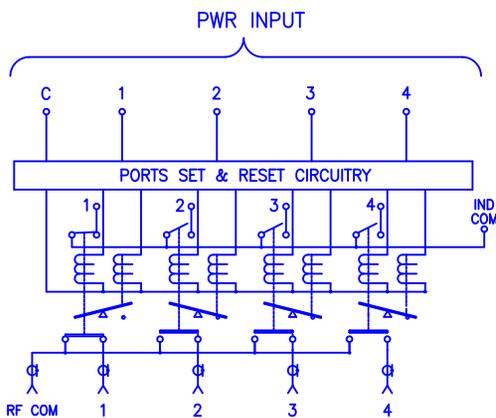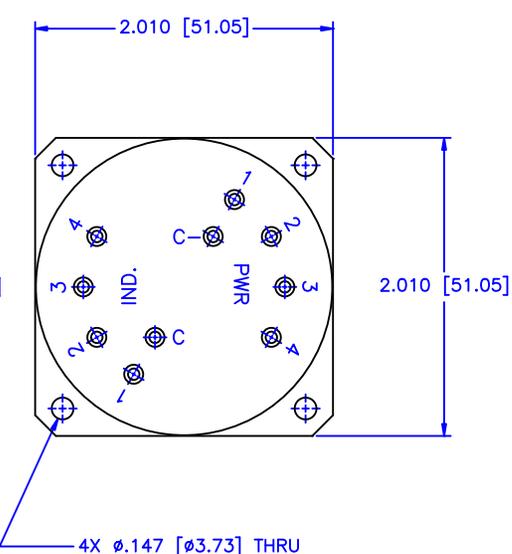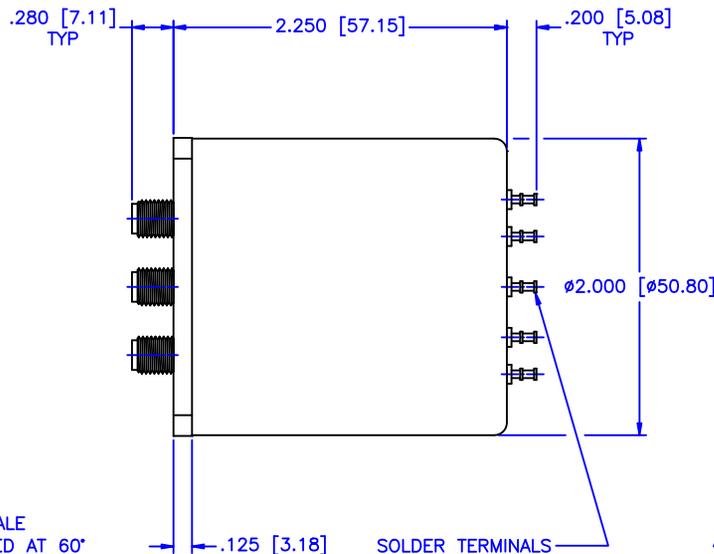

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-19-2008	DRAWING TITLE: ELECTROMECHANICAL SWITCHES	
APPROVED: T. Nguyen		DATE: 03-19-2008	PART NO. 04-7-LI	
THIRD ANGLE PROJECTION		CAGE CODE: 0D2L5	SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 83988