



N RF Relay SPDT Switch From DC to 8 GHz Rated To 200 Watts And 24 Volts To 32 Volts With H, I, P Features

TECHNICAL DATA SHEET

PE7149

N RF Relay SPDT Switch From DC to 8 GHz Rated To 200 Watts And 24 Volts To 32 Volts With H, I, P Features

Configuration

RF Connector	N Female
RF Connector Specification	MIL-C-39012
Control Connector	Solder Terminals
Frequency Range, GHz	DC to 8
Design	SPDT

Electrical Specifications

Frequency Range, GHz	DC to 8
Impedance, Ohms	50
Maximum Input Power, Watts	200
Maximum Input VSWR	1.45:1
Maximum Insertion Loss, dB	0.4
Minimum Isolation, dB	60
Maximum Speed, ms	20
Control Voltage, Volts	24
Actuating Current, mA	127
Indicator Voltage, Volts	32

Frequency 1

Range, GHz	DC to 2
Insertion Loss, dB	0.2
VSWR	1.2
Maximum Input Power, Watts	375
Minimum Isolation, dB	80

Frequency 2

Range, GHz	2 to 4
Insertion Loss, dB	0.35
VSWR	1.35:1
Maximum Input Power, Watts	275
Minimum Isolation, dB	70

Frequency 3

Range, GHz	4 to 8
Insertion Loss, dB	0.4
VSWR	1.45:1
Maximum Input Power, Watts	200
Minimum Isolation, dB	60

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N RF Relay SPDT Switch From DC to 8 GHz Rated To 200 Watts And 24 Volts To 32 Volts With H, I, P Features PE7149](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



N RF Relay SPDT Switch From DC to 8 GHz Rated To 200 Watts And 24 Volts To 32 Volts With H, I, P Features

TECHNICAL DATA SHEET

PE7149

Mechanical Specifications

Temperature

Operating Range, deg C	-30 to +70
Storage Range, deg C	-55 to +100

Size

Length, in [mm]	2.85 [72.39]
Width, in [mm]	2.894 [73.51]
Height, in [mm]	1 [25.4]
Housing Material and Plating	Aluminum, Black Anodized

RF Connector

Contact Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Passivated Stainless Steel

Control Connector

Contact Material and Plating	Iron Nickel, Tin
------------------------------	------------------

Compliance Certifications (visit www.Pasternack.com for current document)

REACH Compliant	06/18/2012
-----------------	------------

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

N RF Relay SPDT Switch From DC to 8 GHz Rated To 200 Watts And 24 Volts To 32 Volts With H, I, P Features from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N RF Relay SPDT Switch From DC to 8 GHz Rated To 200 Watts And 24 Volts To 32 Volts With H, I, P Features PE7149](http://www.pasternack.com/n-rf-relay-spdt-switch-from-dc-to-8ghz-rated-to-200watts-and-24volts-to-32volts-with-h-i-p-features-pe7149)

URL: <http://www.pasternack.com/n-electromechanical-spdt-switch-8ghz-200watts-24-32volts-h-i-p-pe7149-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE7149 CAD Drawing

N RF Relay SPDT Switch From DC to 8 GHz Rated To 200 Watts
And 24 Volts To 32 Volts With H, I, P Features

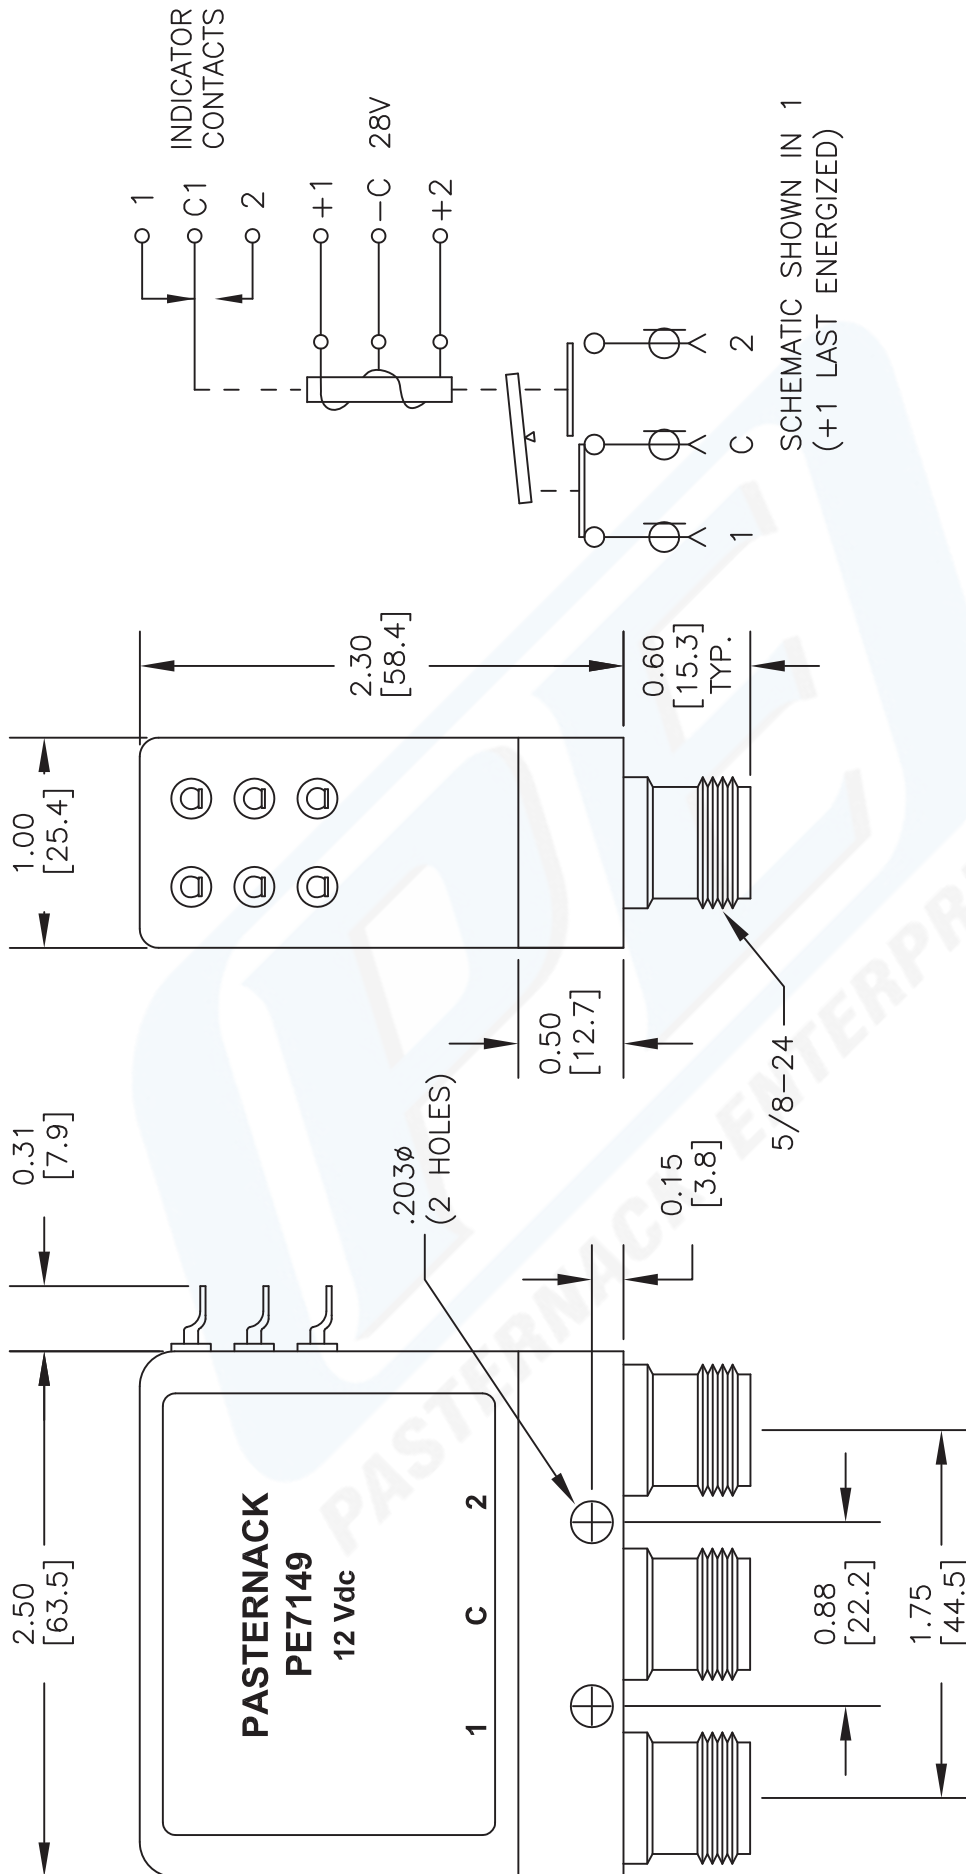

DWG TITLE

PE7149

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS



ESTABLISHED 1972

REV. B

FSCM NO. 53919

CAD FILE 071312

SCALE N/A

SIZE A

2233